

**SAN VITO T01 (in relazione DIASIS 2012: Stazione HVSR - T1)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## SAN VITO T01

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 01/08/12 11:46:31 End recording: 01/08/12 12:32:31

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 57% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $39.97 \pm 3.95$  Hz (in the range 0.0 - 40.0 Hz).

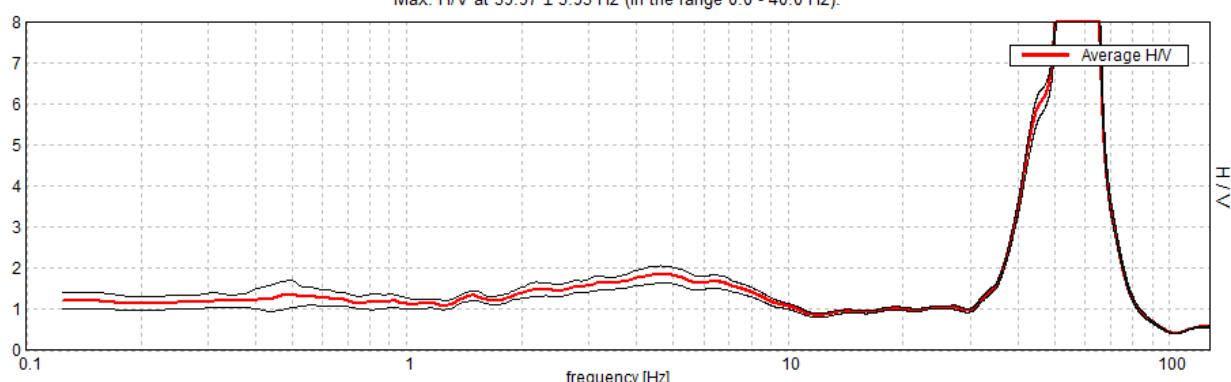


### H/V TIME HISTORY

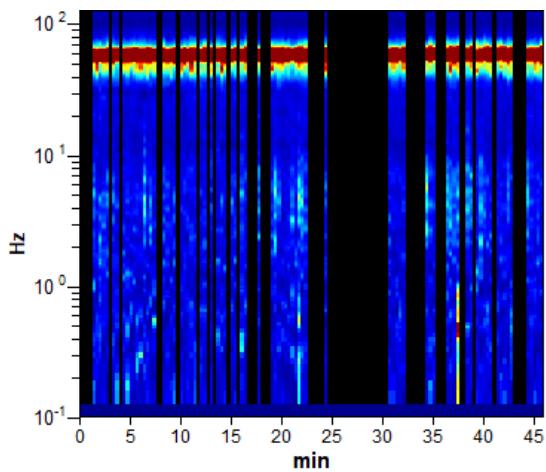


### DIRECTIONAL H/V

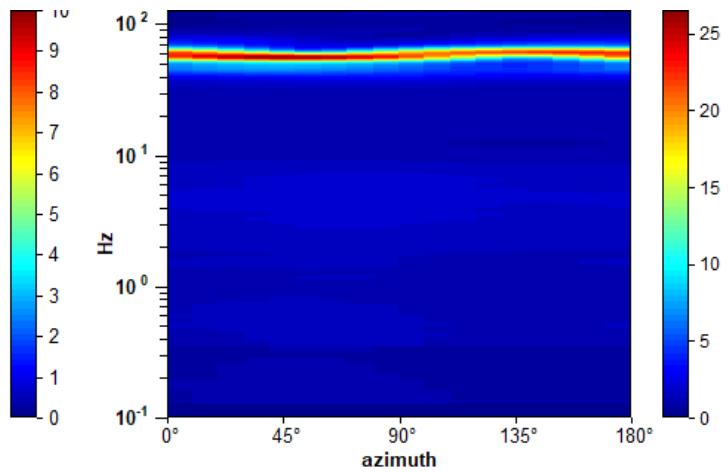

## SINGLE COMPONENT SPECTRA

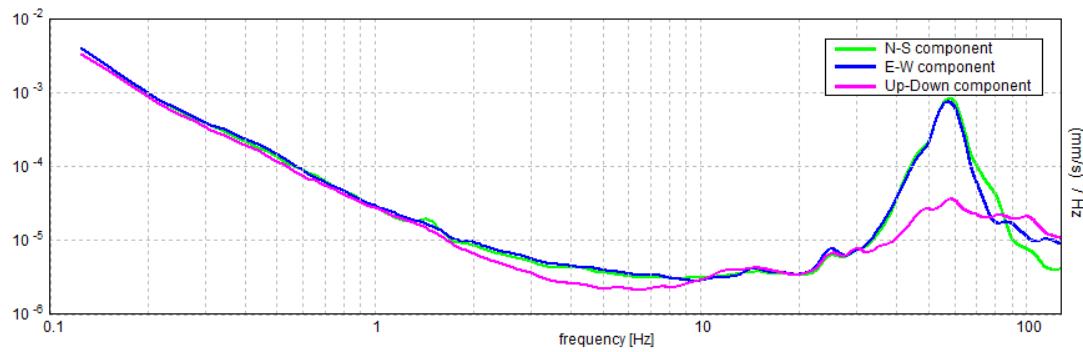


## EXPERIMENTAL vs. SYNTHETIC H/V

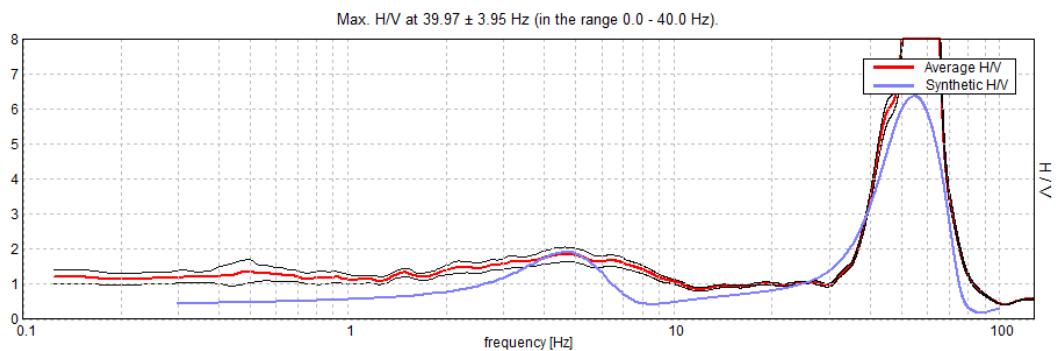

| Depth at the bottom of the layer [m] | Thickness [m] | $V_s$ [m/s] | Poisson ratio |
|--------------------------------------|---------------|-------------|---------------|
| 1.59                                 | 1.59          | 322         | 0.42          |
| 40.59                                | 39.00         | 800         | 0.42          |
| inf.                                 | inf.          | 1450        | 0.42          |

$V_s(0.0-30.0)=742\text{m/s}$

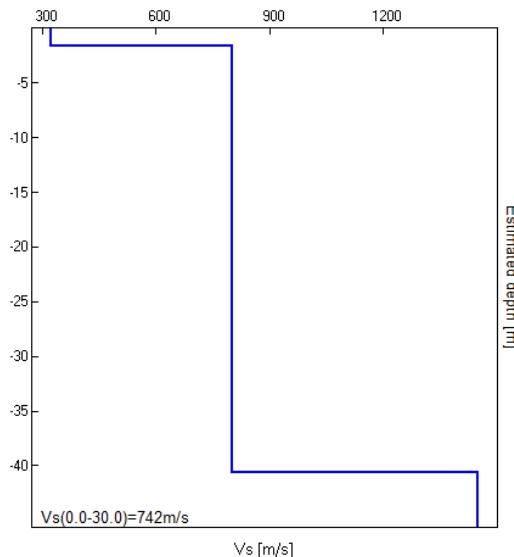

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $18.5 \pm 7.93$  Hz (in the range 0.0 - 20.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|   |                             |    |  |
|---|-----------------------------|----|--|
| $f_0 > 10 / L_w$  | $18.50 > 1.00$              | OK |  |
| $n_c(f_0) > 200$  | $12950.0 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5$ Hz | Exceeded 0 out of 445 times | OK |  |
| $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5$ Hz |                             |    |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                    |    |    |
|---|--------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                    |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 73.063 Hz          | OK |    |
| $A_0 > 2$   | $4.94 > 2$         | OK |    |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.42871  < 0.05$ |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $7.93117 < 0.925$  |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.5901 < 1.58$    | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**SAN VITO T02 (in relazione DIASIS 2012: Stazione HVSR - T2)**



\*sito acquisizione e posizione in vista satellitare da DIASIS 2012

## SAN VITO T02

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 01/08/12 12:38:40 End recording: 01/08/12 13:24:39

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 80% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $39.97 \pm 9.46$  Hz (in the range 0.0 - 40.0 Hz).

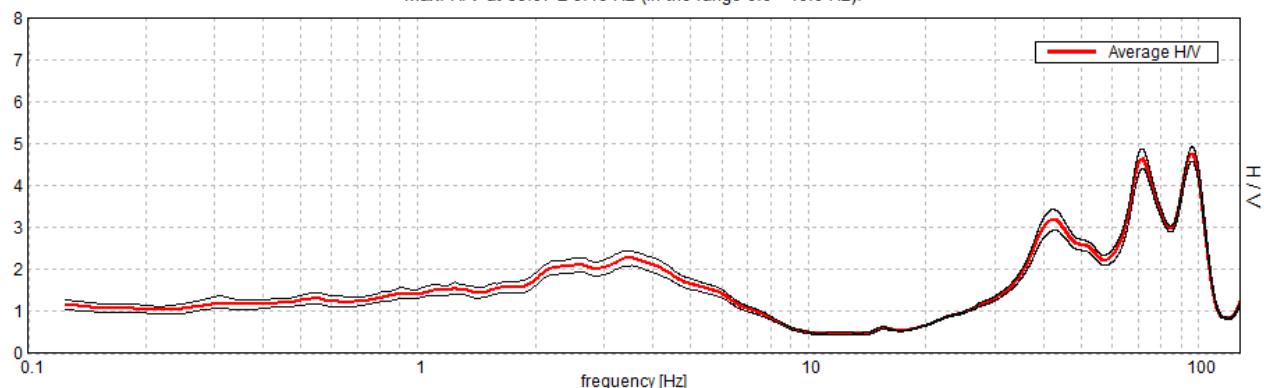


### H/V TIME HISTORY

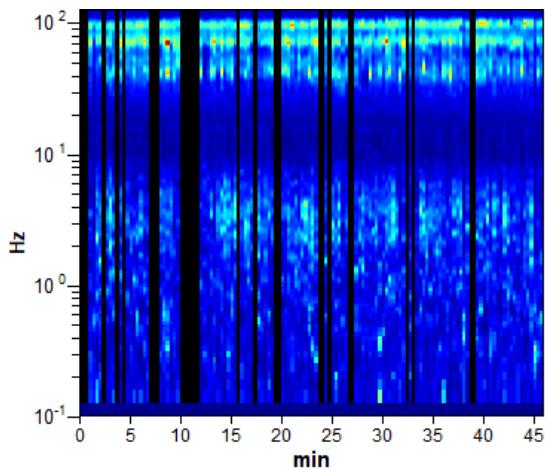


### DIRECTIONAL H/V

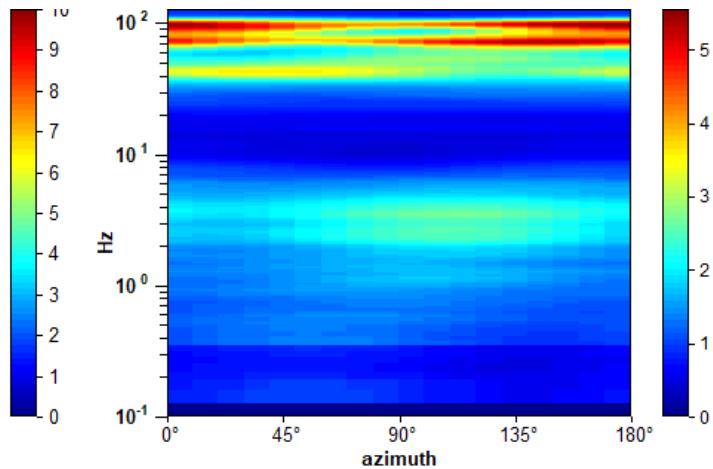

## SINGLE COMPONENT SPECTRA

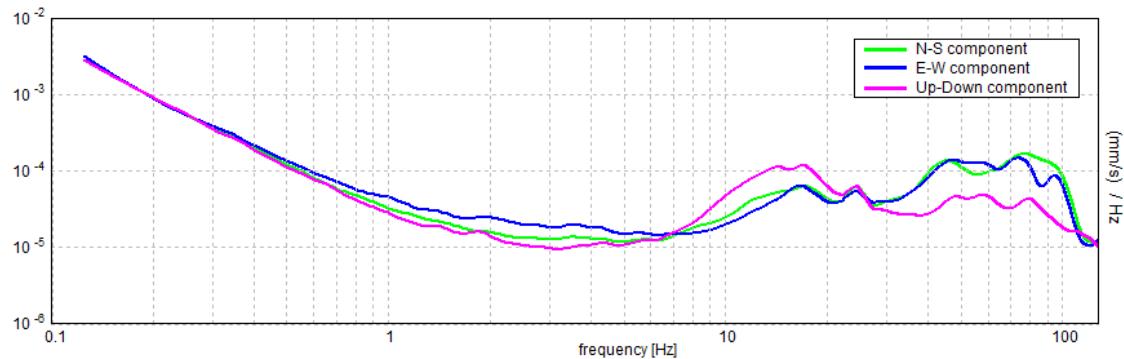


## EXPERIMENTAL vs. SYNTHETIC H/V

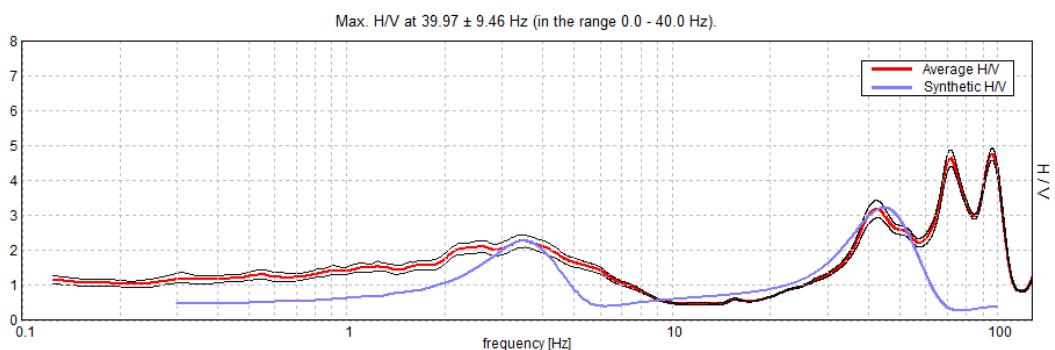

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 2.00                                 | 2.00          | 358      | 0.41          |
| 56.00                                | 54.00         | 800      | 0.41          |
| inf.                                 | inf.          | 1480     | 0.41          |

$$Vs(0.0-30.0)=739 \text{ m/s}$$

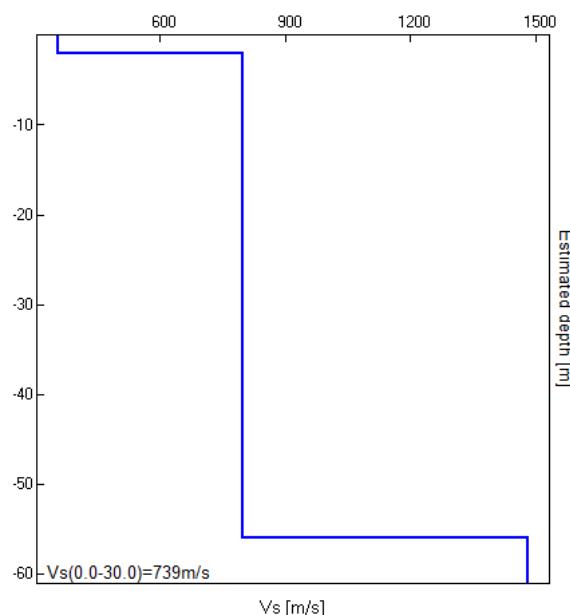

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $39.97 \pm 9.46$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                              |    |  |
|--|------------------------------|----|--|
| $f_0 > 10 / L_w$   | $39.97 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $87931.3 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5$ Hz<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5$ Hz | Exceeded 0 out of 1920 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ | 32.094 Hz           | OK |    |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 108.875 Hz          | OK |    |
| $A_0 > 2$   | $2.98 > 2$          | OK |    |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.23659  < 0.05$  |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $9.45633 < 1.99844$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.2347 < 1.58$     | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**SAN VITO T03 (in relazione DIASIS 2012: Stazione HVSR – T3)**



\*sito acquisizione e posizione in vista satellitare da DIASIS 2012

## SAN VITO, P03

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 01/08/12 13:36:39 End recording: 01/08/12 14:22:39

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analysis performed on the entire trace.

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $0.19 \pm 0.05$  Hz (in the range 0.0 - 40.0 Hz).

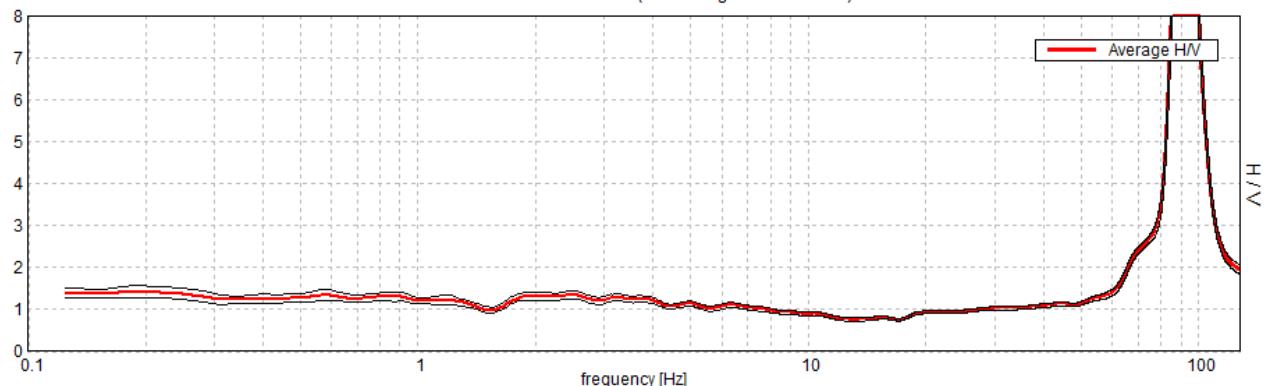


### H/V TIME HISTORY

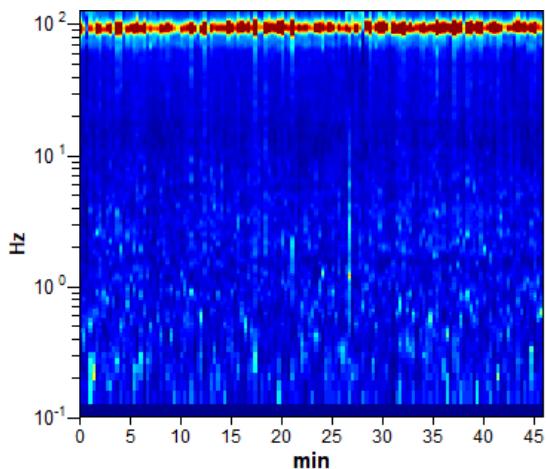


### DIRECTIONAL H/V

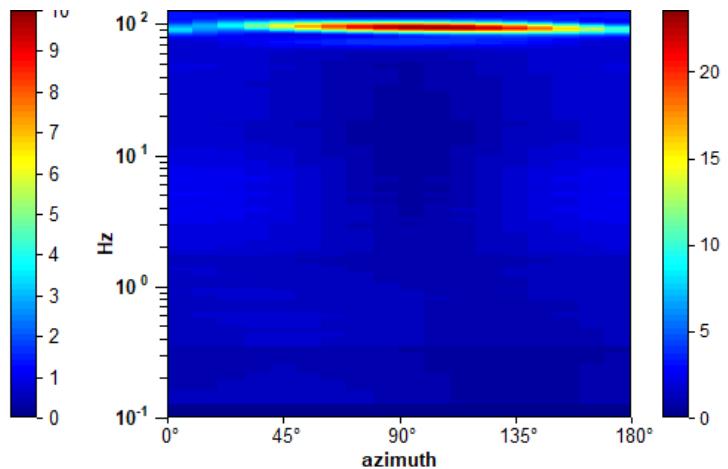

## SINGLE COMPONENT SPECTRA

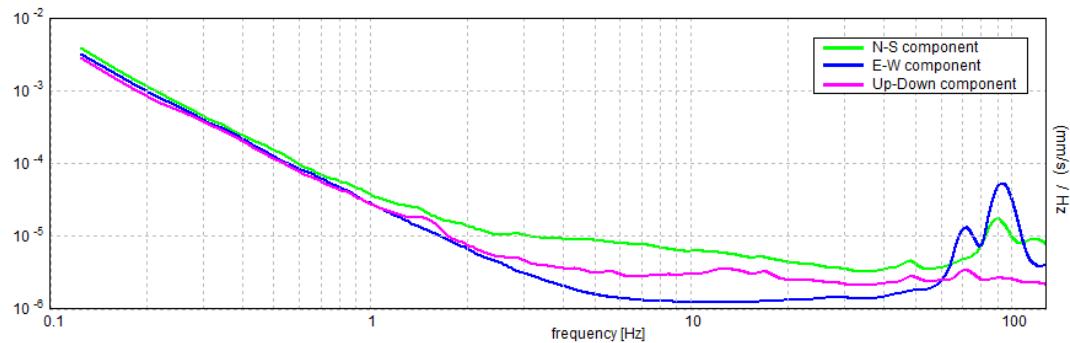


## EXPERIMENTAL vs. SYNTHETIC H/V

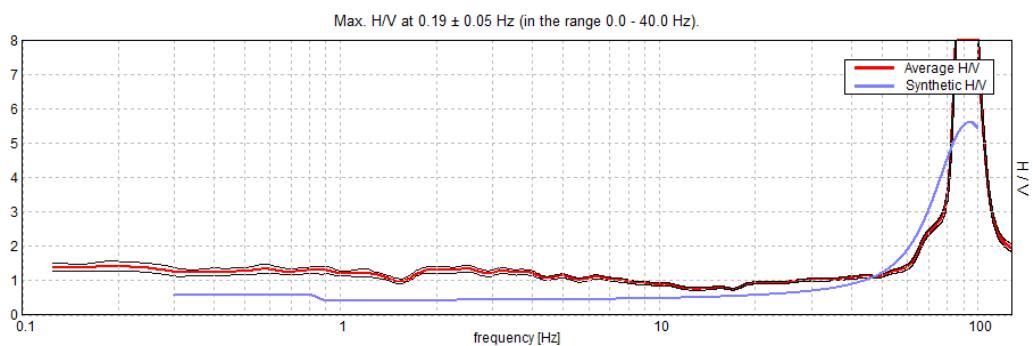

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 0.93                                 | 0.93          | 330      | 0.42          |
| inf.                                 | inf.          | 800      | 0.42          |

$$Vs(0.0-30.0)=766 \text{ m/s}$$

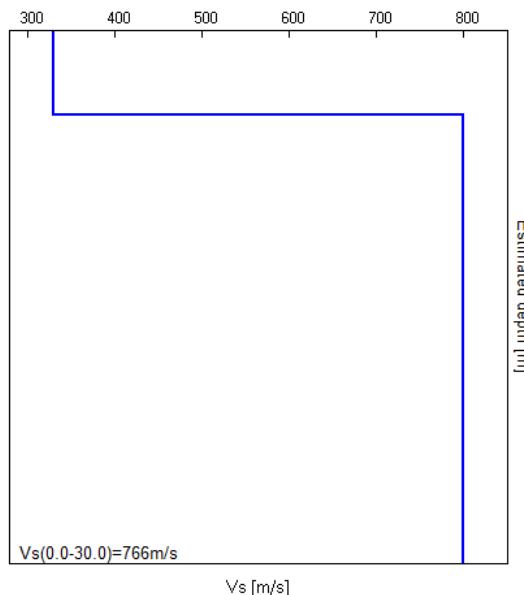

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $0.19 \pm 0.05$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                            |    |    |
|--|----------------------------|----|----|
| $f_0 > 10 / L_w$   | $0.19 > 0.50$              |    | NO |
| $n_c(f_0) > 200$   | $517.5 > 200$              | OK |    |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 10 times | OK |    |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ | 0.094 Hz            | OK |    |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  |                     |    | NO |
| $A_0 > 2$   | $1.43 > 2$          |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.27031  < 0.05$  |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $0.05068 < 0.04688$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1401 < 3.0$      | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**SAN VITO T04 (in relazione DIASIS 2012: Stazione HVSR – T4)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## SAN VITO T04

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 01/08/12 14:11:16 End recording: 01/08/12 14:57:16

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 89% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $3.13 \pm 4.97$  Hz (in the range 0.0 - 40.0 Hz).

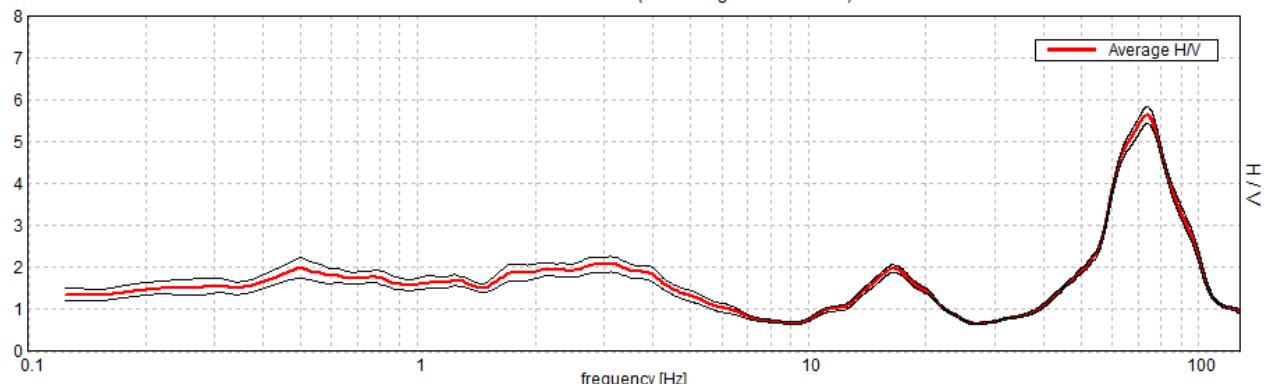


### H/V TIME HISTORY

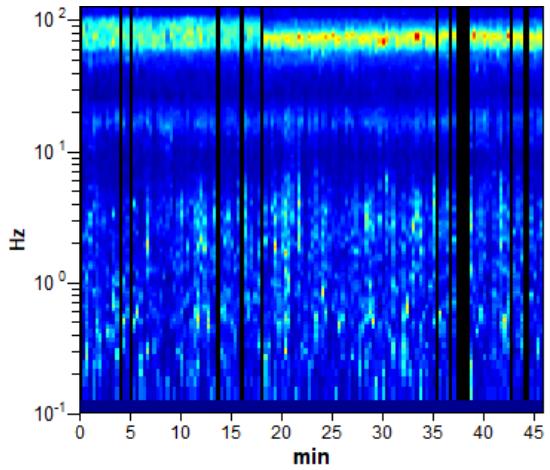


### DIRECTIONAL H/V

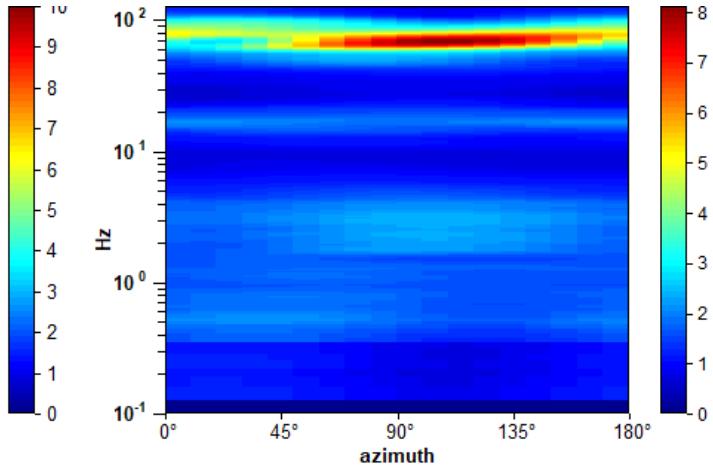

## SINGLE COMPONENT SPECTRA

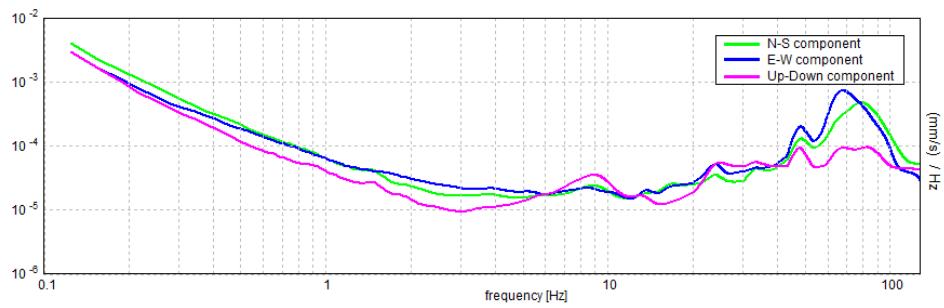


## EXPERIMENTAL vs. SYNTHETIC H/V

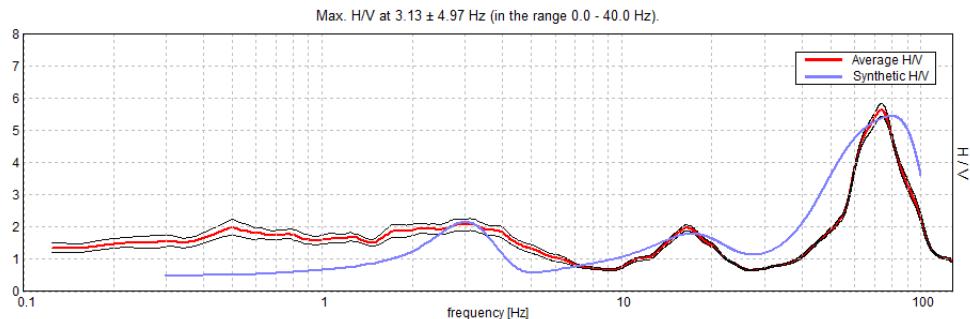

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 0.70                                 | 0.70          | 221      | 0.45          |
| 2.70                                 | 2.00          | 530      | 0.35          |
| 11.70                                | 9.00          | 800      | 0.35          |
| 107.70                               | 96.00         | 1250     | 0.35          |
| inf.                                 | inf.          | 2100     | 0.45          |

$$Vs(0.0-30.0) = 914 \text{ m/s}$$

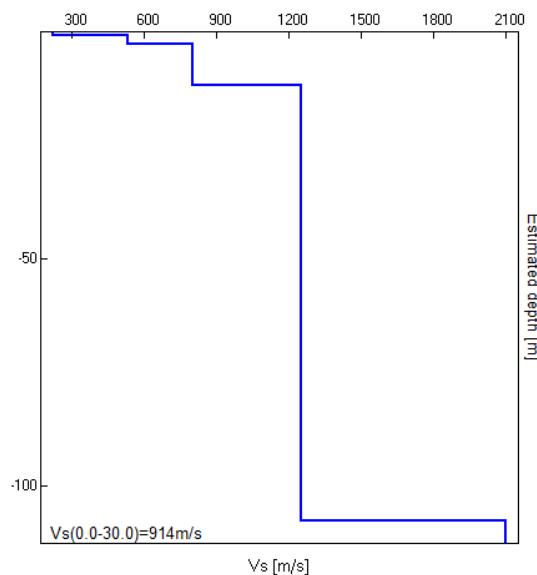

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $3.13 \pm 4.97$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                             |    |  |
|--|-----------------------------|----|--|
| $f_0 > 10 / L_w$   | $3.13 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $7687.5 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5$ Hz<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5$ Hz | Exceeded 0 out of 151 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|  |                    |    |    |
|--|--------------------|----|----|
| Exists $f$ in $[f_0/4, f_0]$   $A_{H/V}(f) < A_0 / 2$    |                    |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$ | 6.031 Hz           | OK |    |
| $A_0 > 2$  | $2.08 > 2$         | OK |    |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$     | $ 1.59165  < 0.05$ |    | NO |
| $\sigma_f < \varepsilon(f_0)$                            | $4.9739 < 0.15625$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                            | $0.1875 < 1.58$    | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**SAN VITO T05 (in relazione DIASIS 2012: Stazione HVSR – T5)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## SAN VITO T05

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 11:39:17 End recording: 02/08/12 12:25:18

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 92% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $2.81 \pm 1.15$  Hz (in the range 0.0 - 40.0 Hz).

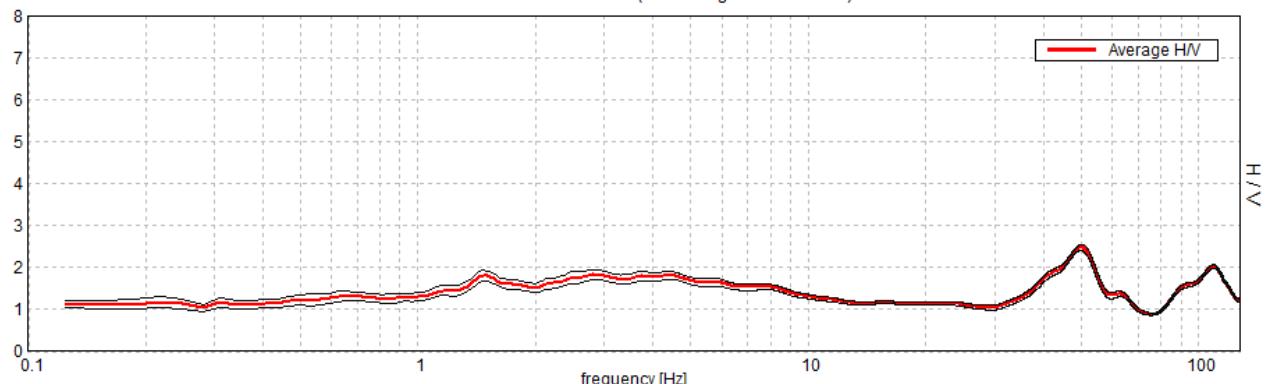


### H/V TIME HISTORY

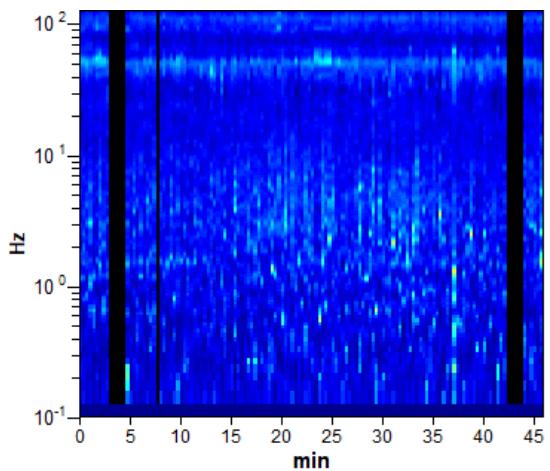


### DIRECTIONAL H/V

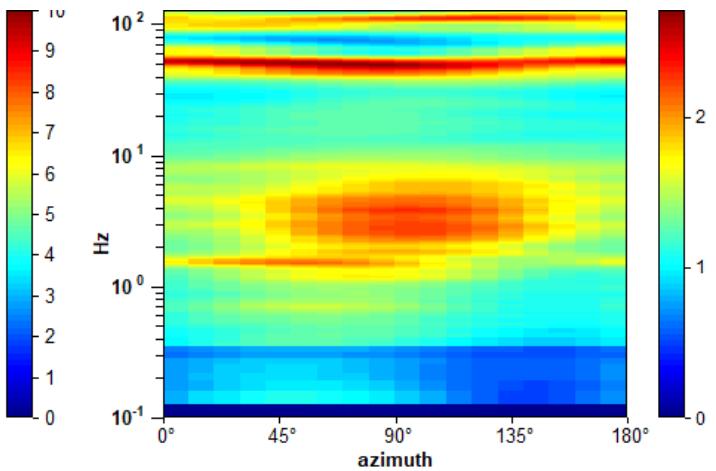

## SINGLE COMPONENT SPECTRA

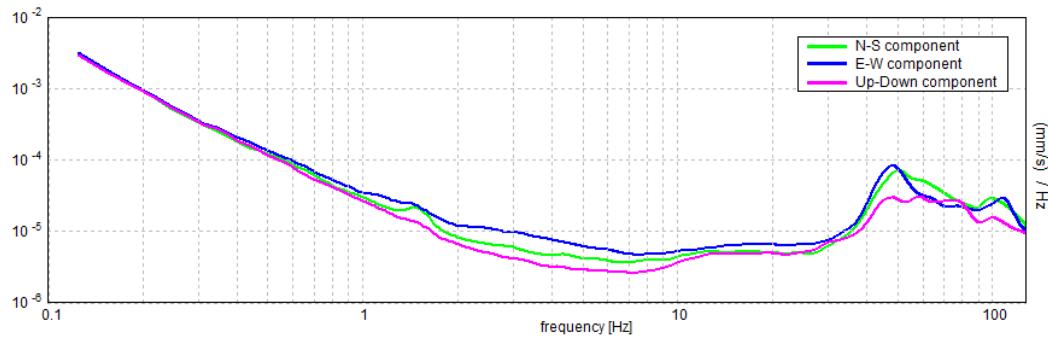


## EXPERIMENTAL vs. SYNTHETIC H/V

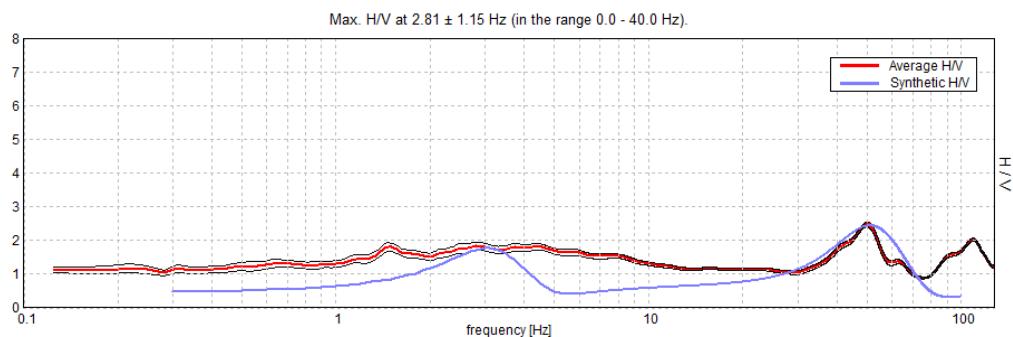

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 1.90                                 | 1.90          | 400      | 0.42          |
| 61.90                                | 60.00         | 800      | 0.42          |
| inf.                                 | inf.          | 1400     | 0.45          |

$Vs(0.0-30.0)=752$  m/s

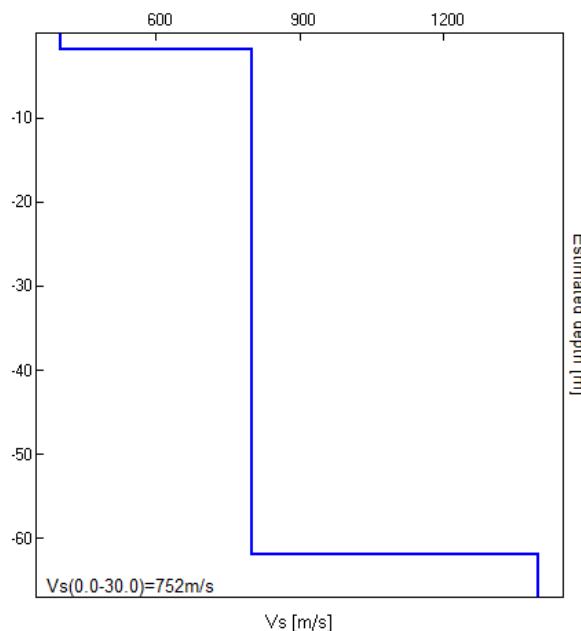

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $2.81 \pm 1.15$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                             |    |  |
|--|-----------------------------|----|--|
| $f_0 > 10 / L_w$   | $2.81 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $7143.8 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 136 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                     |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  |                     |    | NO |
| $A_0 > 2$   | $1.83 > 2$          |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.40896  < 0.05$  |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $1.15019 < 0.14063$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1245 < 1.58$     | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**SAN VITO T06 (in relazione DIASIS 2012: Stazione HVSR – T6)**



\*sito acquisizione e posizione in vista satellitare da DIASIS 2012

## SAN VITO T06

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 10:16:36 End recording: 02/08/12 11:02:36

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 96% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $1.5 \pm 0.74$  Hz (in the range 0.0 - 40.0 Hz).

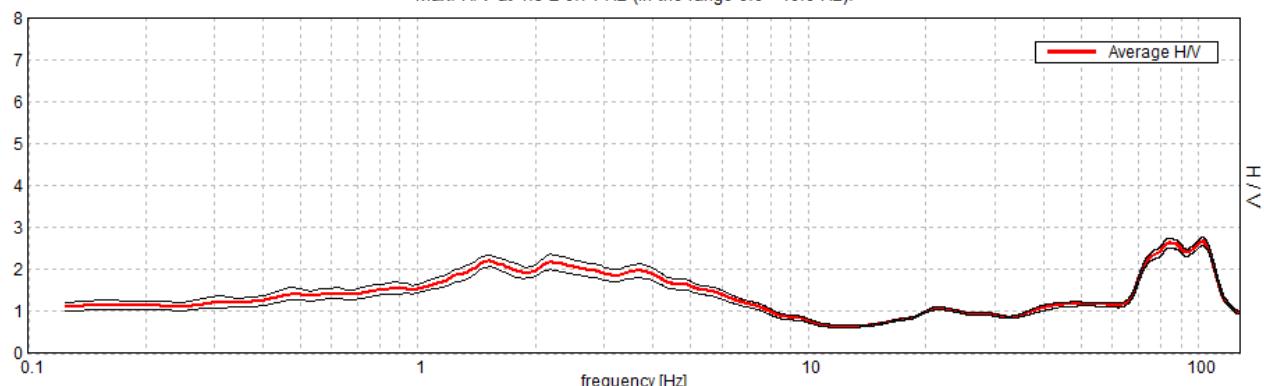


### H/V TIME HISTORY

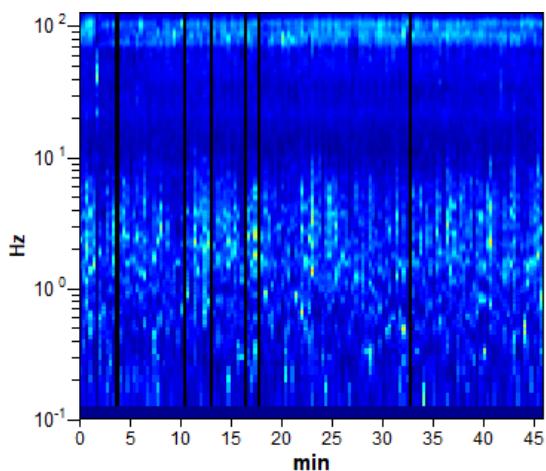


### DIRECTIONAL H/V

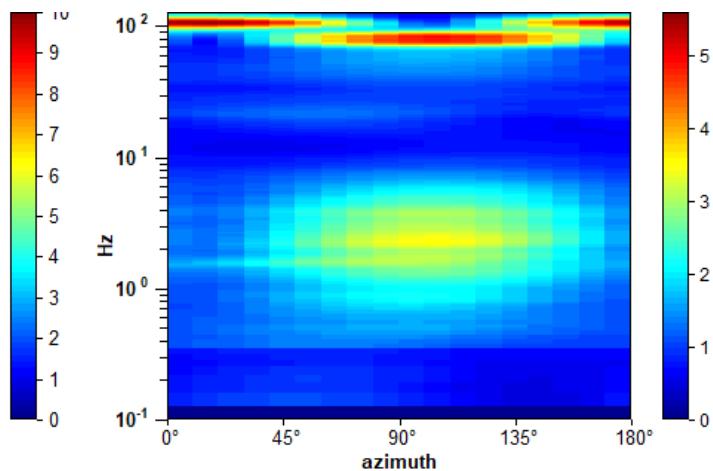

## SINGLE COMPONENT SPECTRA

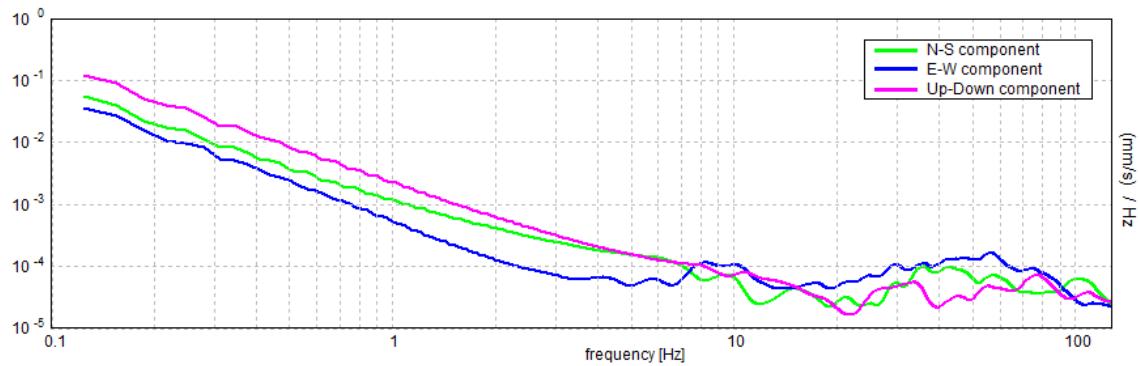


## EXPERIMENTAL vs. SYNTHETIC H/V

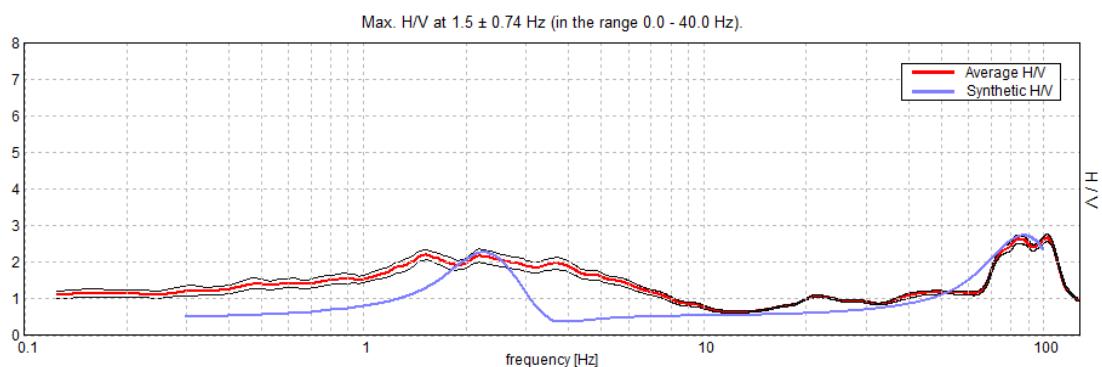

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 1.00                                 | 1.00          | 350      | 0.37          |
| 88.00                                | 87.00         | 800      | 0.37          |
| inf.                                 | inf.          | 1570     | 0.40          |

$$Vs(0.0-30.0) = 767 \text{ m/s}$$

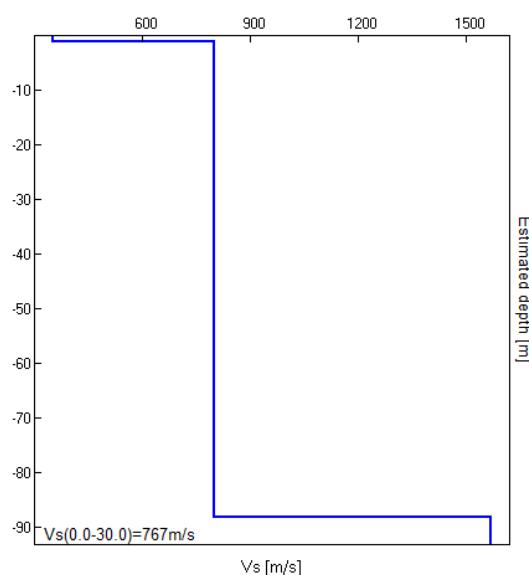

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $1.5 \pm 0.74$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                            |    |  |
|--|----------------------------|----|--|
| $f_0 > 10 / L_w$   | $1.50 > 0.50$              | OK |  |
| $n_c(f_0) > 200$   | $3960.0 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5$ Hz<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5$ Hz | Exceeded 0 out of 73 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                    |    |    |
|---|--------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                    |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  |                    |    | NO |
| $A_0 > 2$   | $2.20 > 2$         | OK |    |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.49424  < 0.05$ |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $0.74136 < 0.15$   |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.142 < 1.78$     | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**SAN VITO T07 (in relazione DIASIS 2012: Stazione HVSR – T7)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## SAN VITO T07

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 12:27:31 End recording: 02/08/12 13:13:31

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 91% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $1.81 \pm 0.37$  Hz (in the range 0.0 - 40.0 Hz).

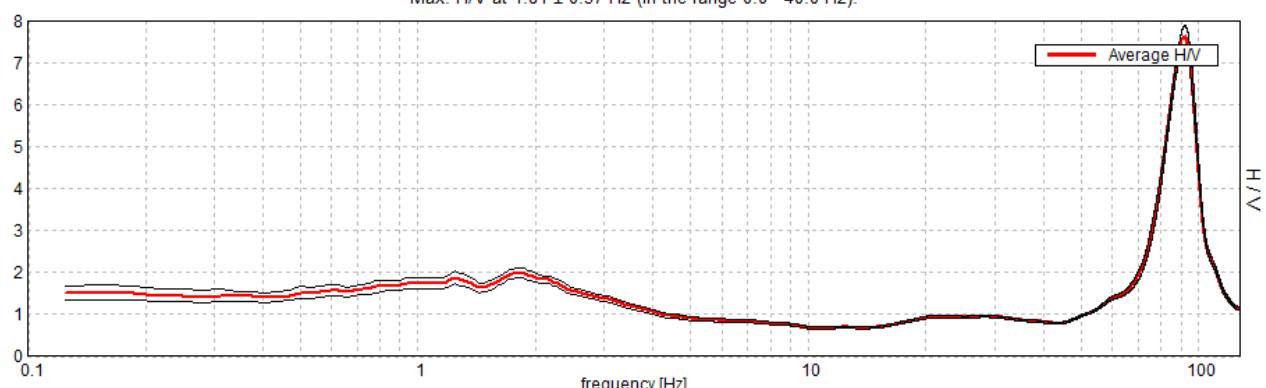


### H/V TIME HISTORY

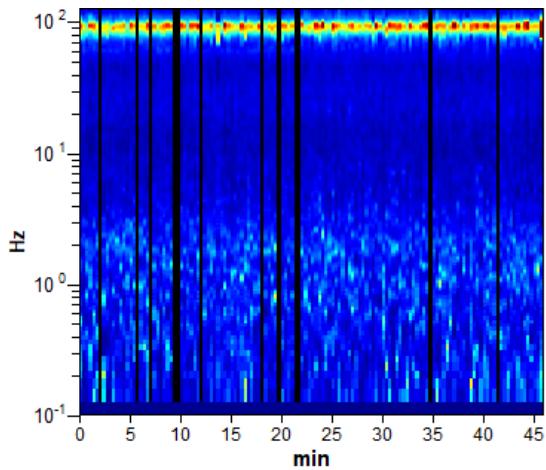


### DIRECTIONAL H/V

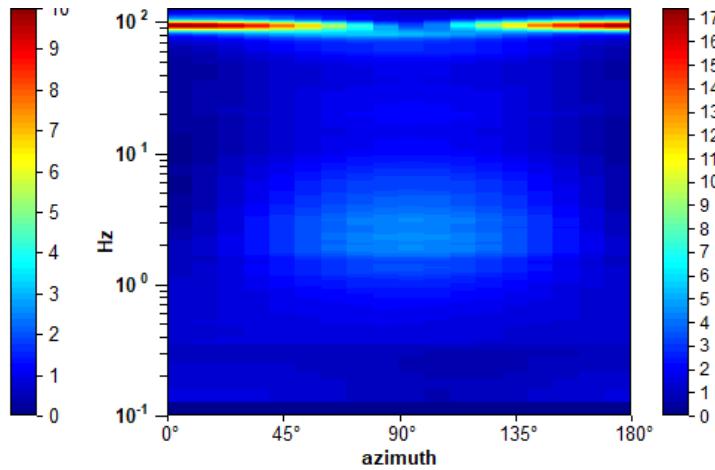

## SINGLE COMPONENT SPECTRA

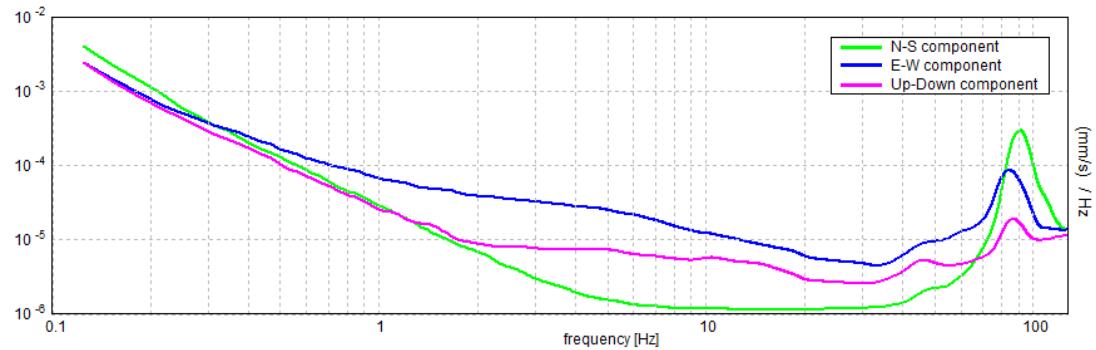


## EXPERIMENTAL vs. SYNTHETIC H/V

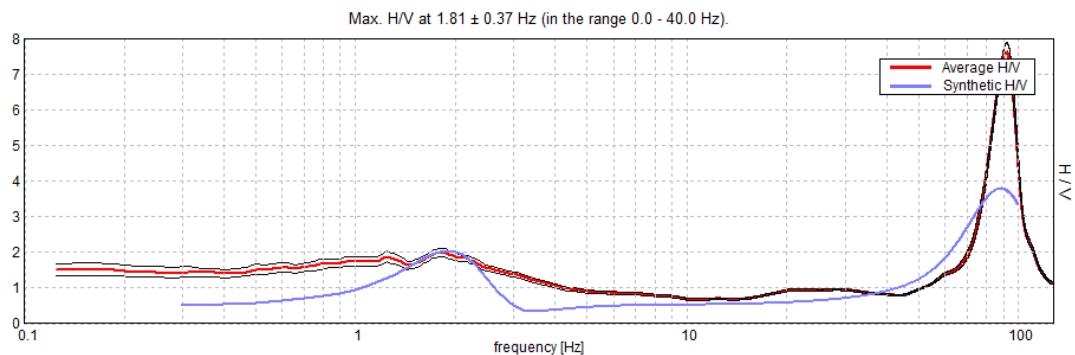

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 1.00                                 | 1.00          | 350      | 0.42          |
| 99.00                                | 98.00         | 800      | 0.42          |
| inf.                                 | inf.          | 1550     | 0.45          |

$$Vs(0.0-30.0) = 767 \text{ m/s}$$

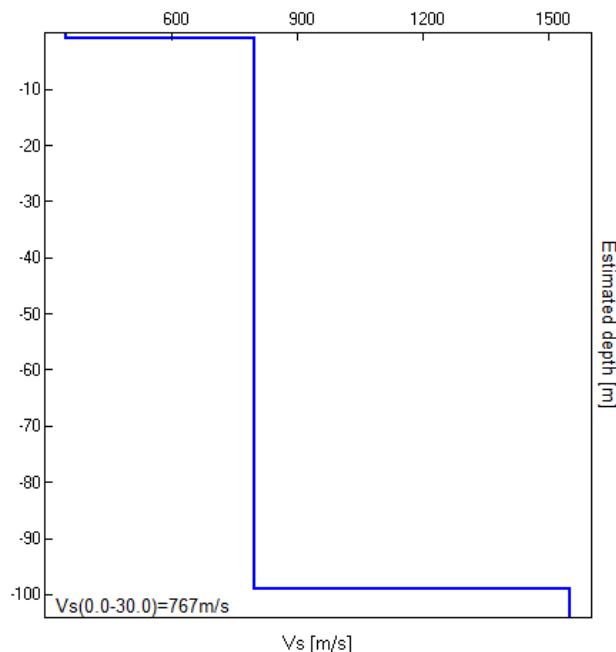

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $1.81 \pm 0.37$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                            |    |  |
|--|----------------------------|----|--|
| $f_0 > 10 / L_w$   | $1.81 > 0.50$              | OK |  |
| $n_c(f_0) > 200$   | $4567.5 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 88 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                     |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 4.25 Hz             | OK |    |
| $A_0 > 2$   | $1.99 > 2$          |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.20571  < 0.05$  |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $0.37284 < 0.18125$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1197 < 1.78$     | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**SAN VITO T08 (in relazione DIASIS 2012: Stazione HVSR – T8)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## SAN VITO T08

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 09:22:24 End recording: 02/08/12 10:08:24

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 96% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $1.53 \pm 0.42$  Hz (in the range 0.0 - 40.0 Hz).

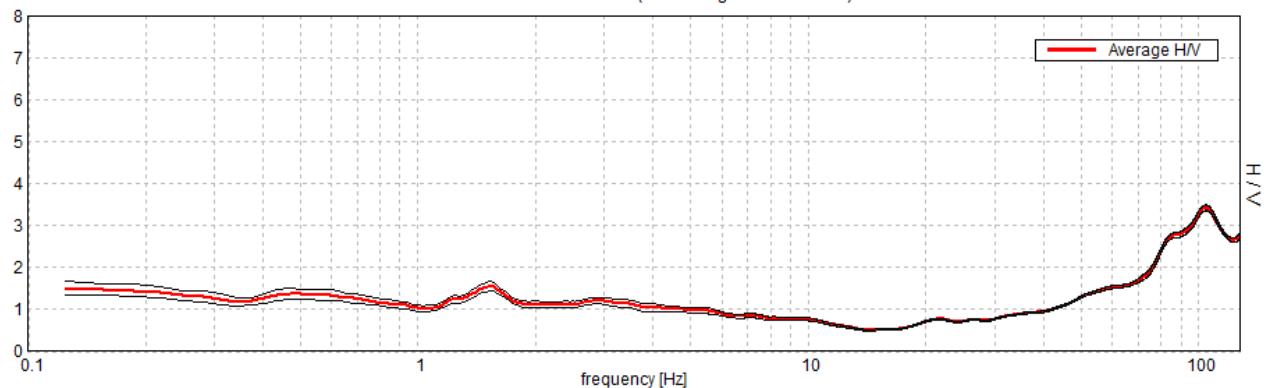


### H/V TIME HISTORY

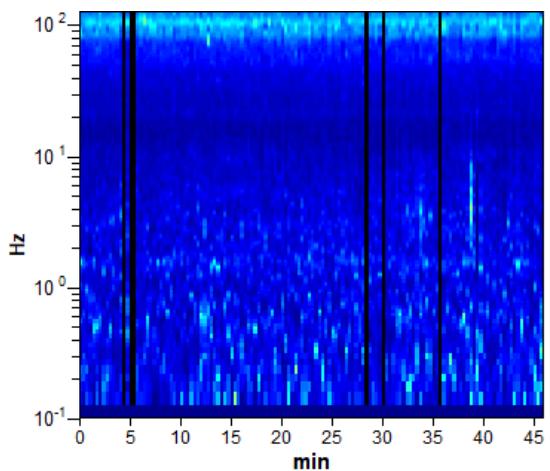


### DIRECTIONAL H/V

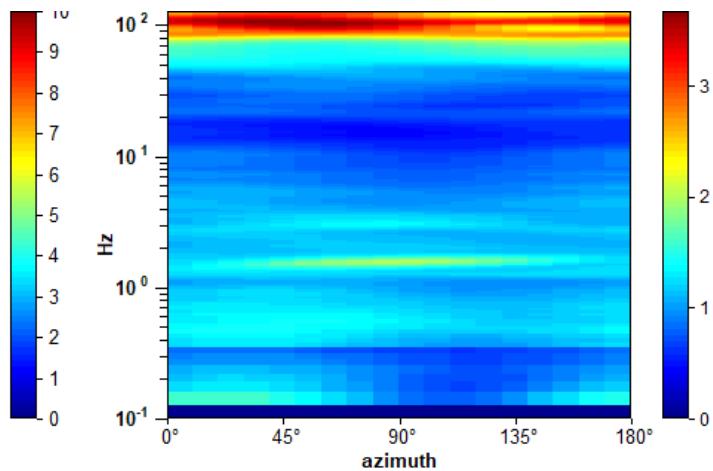

## SINGLE COMPONENT SPECTRA

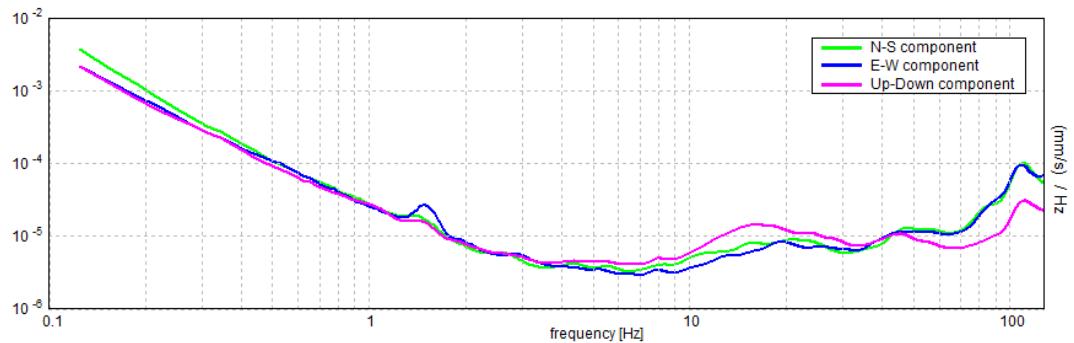


## EXPERIMENTAL vs. SYNTHETIC H/V

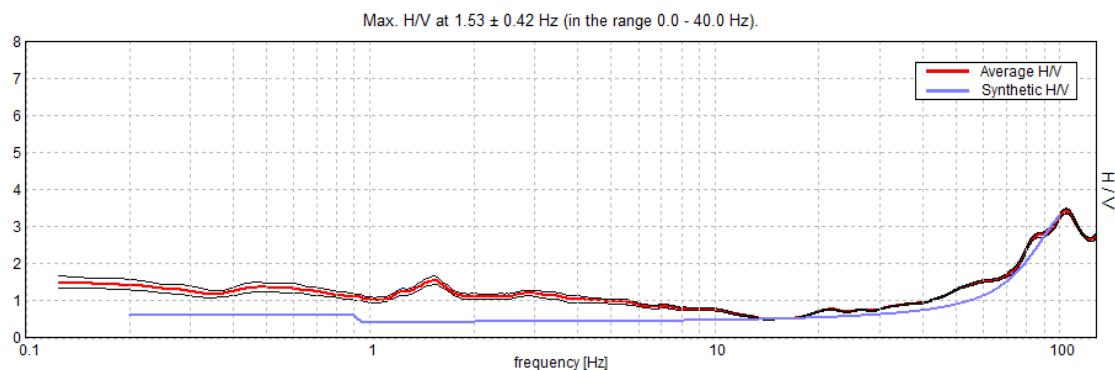

| Depth at the bottom of the layer [m] | Thickness [m] | $V_s$ [m/s] | Poisson ratio |
|--------------------------------------|---------------|-------------|---------------|
| 0.80                                 | 0.80          | 350         | 0.41          |
| inf.                                 | inf.          | 800         | 0.41          |

$$V_s(0.0-30.0) = 773 \text{ m/s}$$

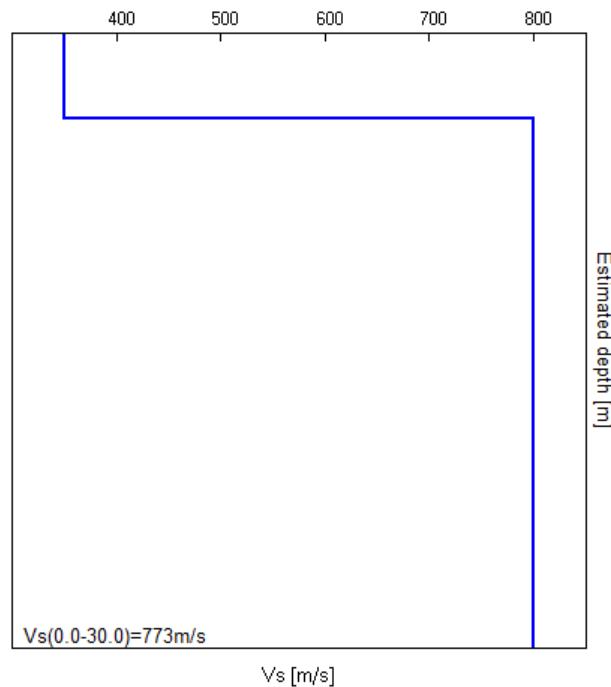

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $1.53 \pm 0.42$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                            |    |  |
|--|----------------------------|----|--|
| $f_0 > 10 / L_w$   | $1.53 > 0.50$              | OK |  |
| $n_c(f_0) > 200$   | $4042.5 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 74 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                     |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  |                     |    | NO |
| $A_0 > 2$   | $1.55 > 2$          |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.27471  < 0.05$  |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $0.42065 < 0.15313$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1109 < 1.78$     | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**SAN VITO T09 (in relazione DIASIS 2012: Stazione HVSR – T9)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## SAN VITO T09

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 01/08/12 15:44:16 End recording: 01/08/12 16:30:16

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 88% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $39.97 \pm 11.37$  Hz (in the range 0.0 - 40.0 Hz).

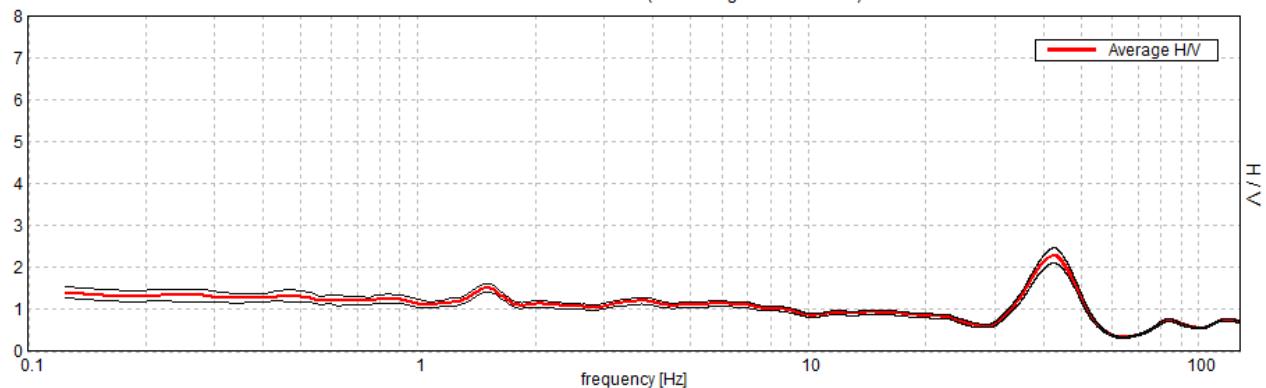


### H/V TIME HISTORY

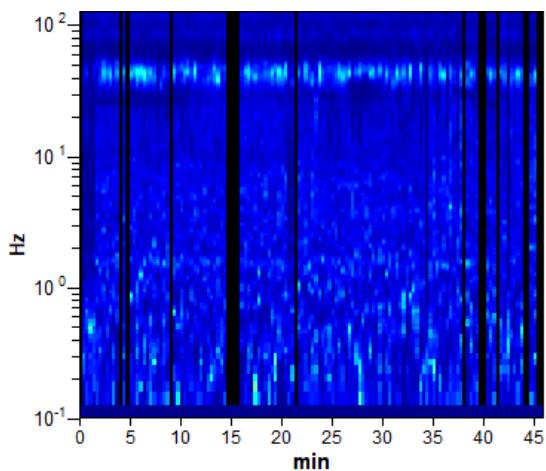


### DIRECTIONAL H/V

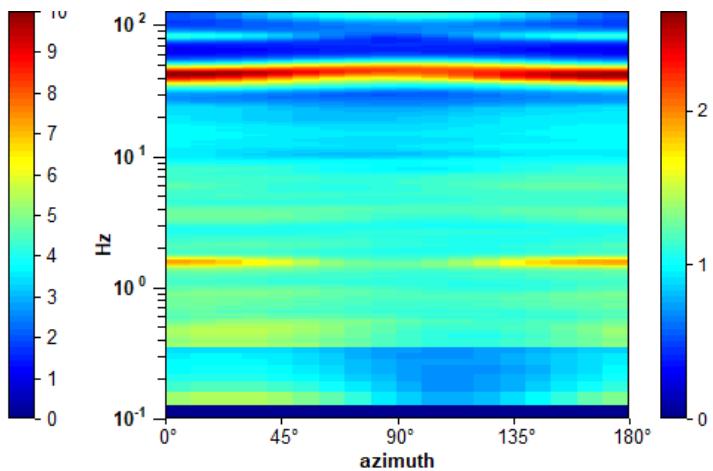

## SINGLE COMPONENT SPECTRA

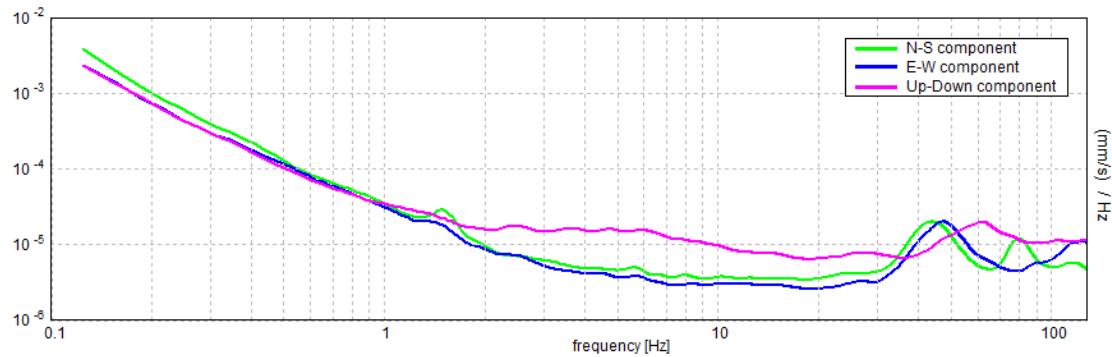


## EXPERIMENTAL vs. SYNTHETIC H/V

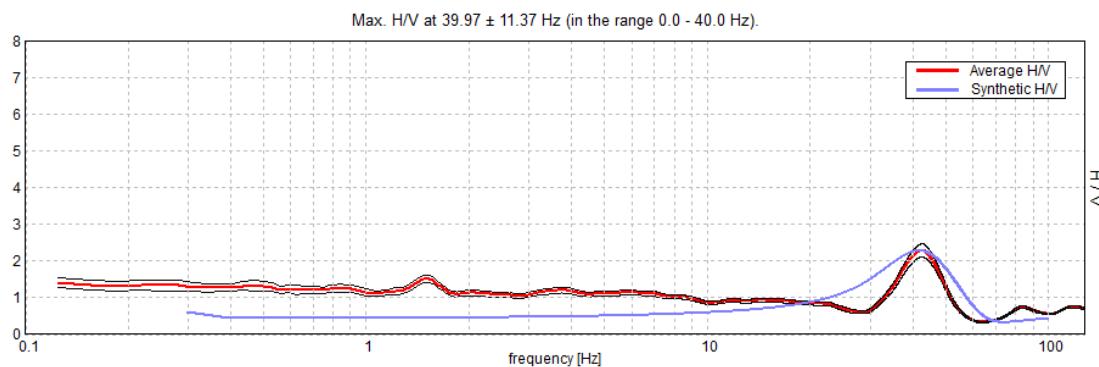

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 2.20                                 | 2.20          | 380      | 0.39          |
| inf.                                 | inf.          | 800      | 0.39          |

$$Vs(0.0-30.0)=740 \text{ m/s}$$

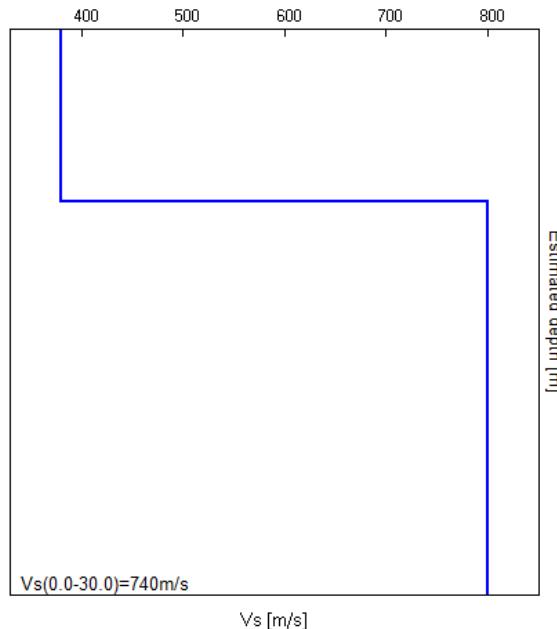

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $39.97 \pm 11.37$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                              |    |  |
|--|------------------------------|----|--|
| $f_0 > 10 / L_w$   | $39.97 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $96724.4 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 1920 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                      |    |    |
|---|----------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ | 33.375 Hz            | OK |    |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 51.344 Hz            | OK |    |
| $A_0 > 2$   | $2.12 > 2$           | OK |    |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.28438  < 0.05$   |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $11.36629 < 1.99844$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1574 < 1.58$      | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

| Threshold values for $\sigma_f$ and $\sigma_A(f_0)$ |            |           |            |            |            |
|---|------------|-----------|------------|------------|------------|
| Freq. range [Hz]                                    | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
| $\varepsilon(f_0)$ [Hz]                             | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$                   | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$     | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**SAN VITO T10 (in relazione DIASIS 2012: Stazione HVSR – T10)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## SAN VITO T10

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 10:25:24 End recording: 02/08/12 11:11:24

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 93% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $34.38 \pm 0.38$  Hz (in the range 0.0 - 40.0 Hz).

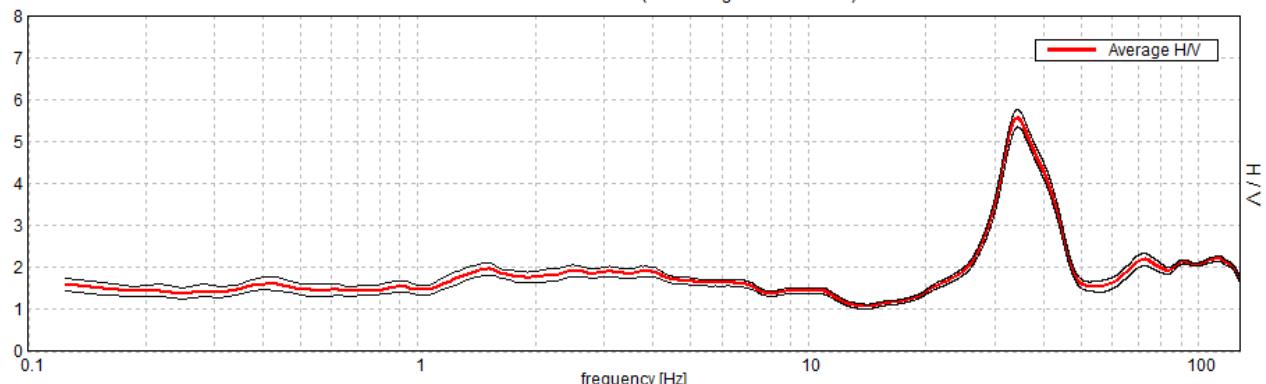


### H/V TIME HISTORY

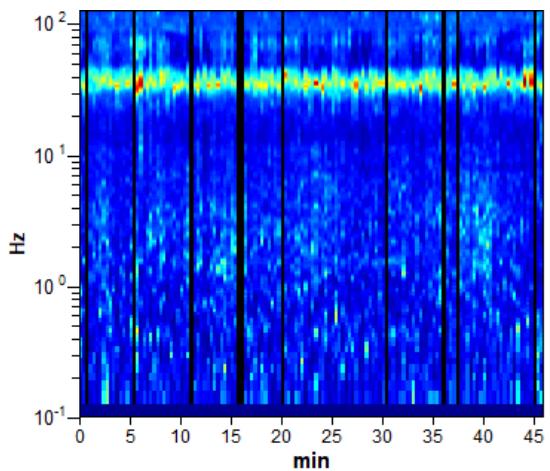


### DIRECTIONAL H/V

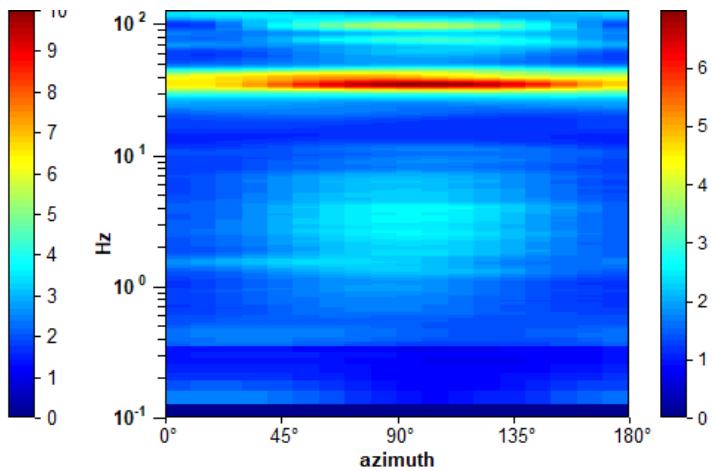

## SINGLE COMPONENT SPECTRA

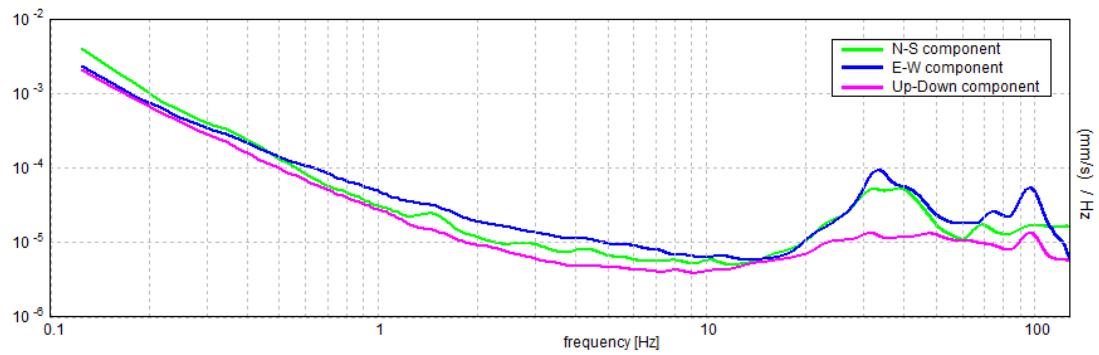


## EXPERIMENTAL vs. SYNTHETIC H/V

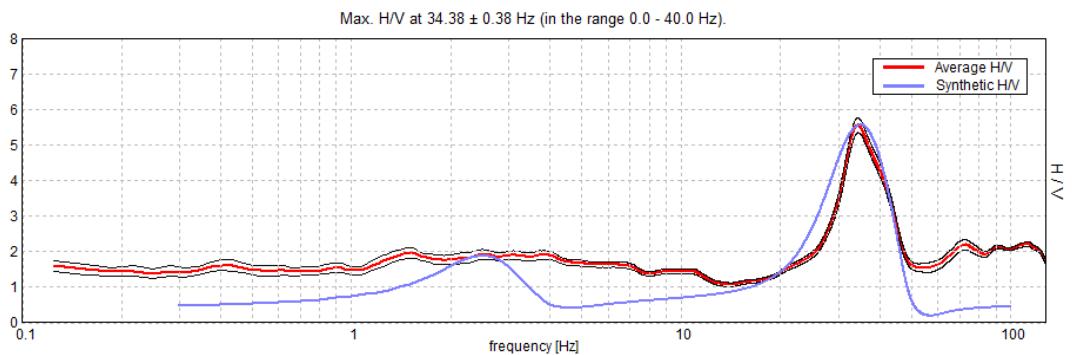

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 2.50                                 | 2.50          | 330      | 0.42          |
| 76.50                                | 74.00         | 800      | 0.42          |
| inf.                                 | inf.          | 1425     | 0.42          |

$$Vs(0.0-30.0)=715 \text{ m/s}$$

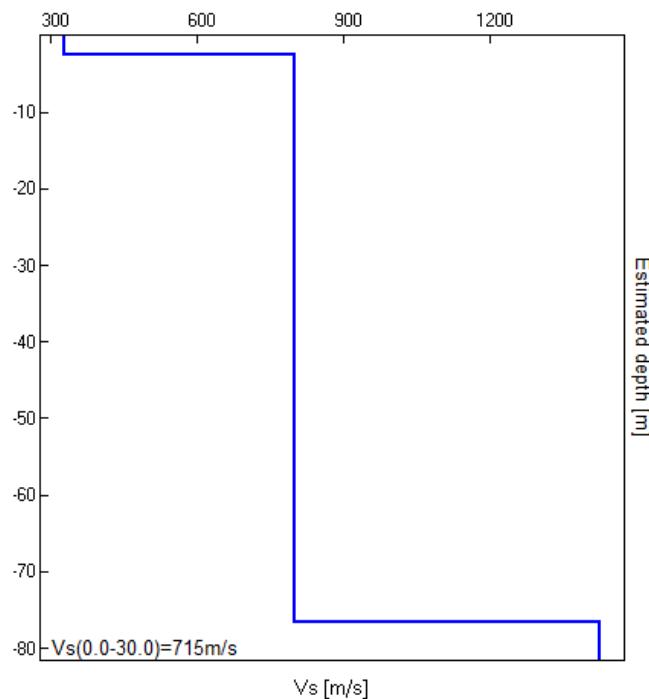

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $34.38 \pm 0.38$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                              |    |  |
|--|------------------------------|----|--|
| $f_0 > 10 / L_w$   | $34.38 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $88000.0 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 1651 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                     |    |  |
|---|---------------------|----|--|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ | 28.406 Hz           | OK |  |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 44.906 Hz           | OK |  |
| $A_0 > 2$   | $5.56 > 2$          | OK |  |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.01099  < 0.05$  | OK |  |
| $\sigma_f < \varepsilon(f_0)$                             | $0.37777 < 1.71875$ | OK |  |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.2099 < 1.58$     | OK |  |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**SAN VITO T11 (in relazione DIASIS 2012: Stazione HVSR – T11)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## SAN VITO T11

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 11:17:45 End recording: 02/08/12 12:03:45

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 85% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $3.5 \pm 0.97$  Hz (in the range 0.0 - 40.0 Hz).

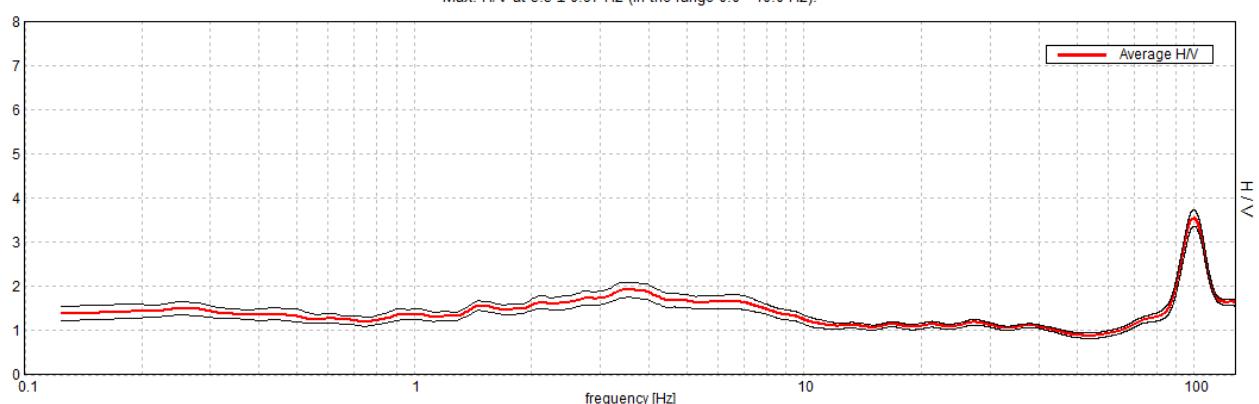


### H/V TIME HISTORY

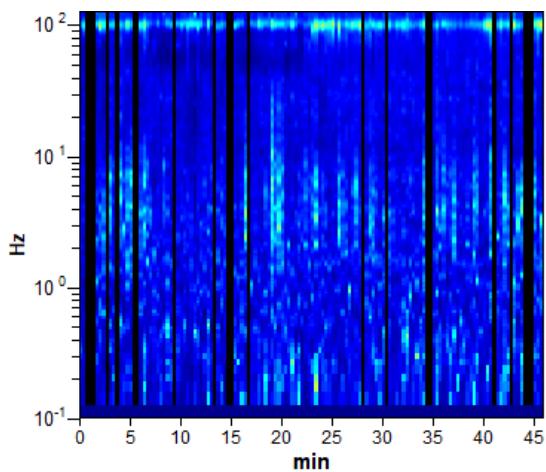


### DIRECTIONAL H/V

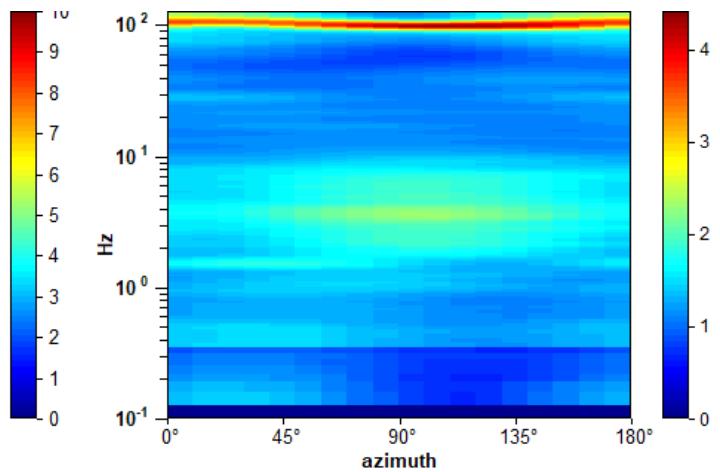

## SINGLE COMPONENT SPECTRA

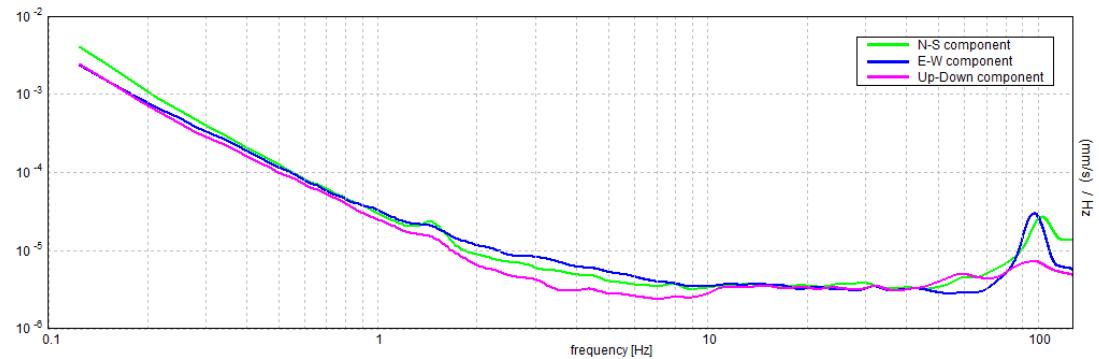


## EXPERIMENTAL vs. SYNTHETIC H/V

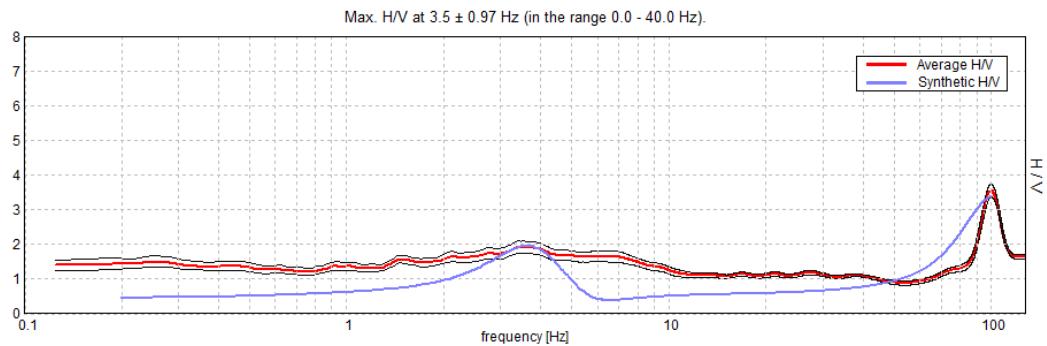

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 0.90                                 | 0.90          | 365      | 0.40          |
| 53.90                                | 53.00         | 800      | 0.40          |
| inf.                                 | inf.          | 1440     | 0.40          |

$Vs(0.0-30.0) = 772 \text{ m/s}$

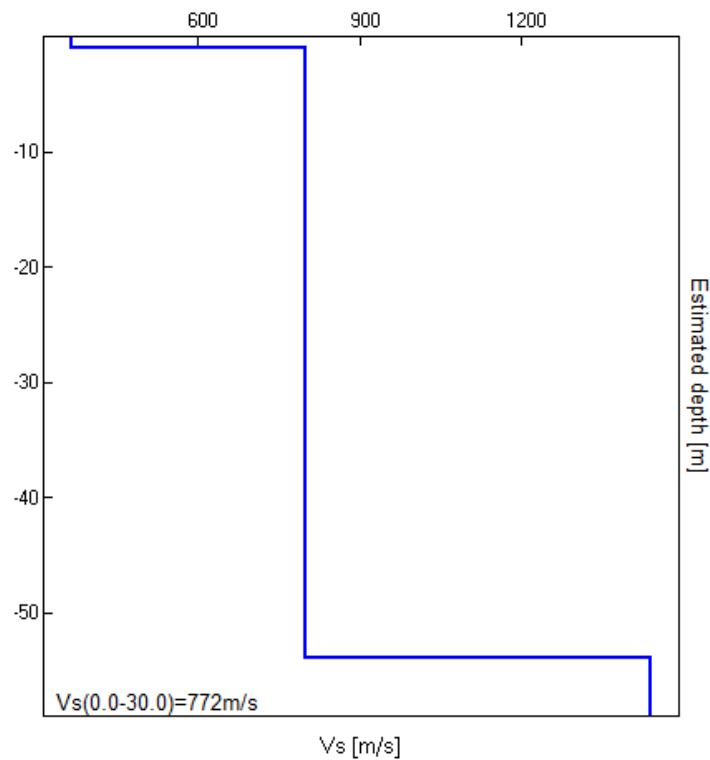

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $3.5 \pm 0.97$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                             |    |  |
|--|-----------------------------|----|--|
| $f_0 > 10 / L_w$   | $3.50 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $8190.0 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 169 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                    |    |    |
|---|--------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                    |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  |                    |    | NO |
| $A_0 > 2$   | $1.92 > 2$         |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.27592  < 0.05$ |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $0.96573 < 0.175$  |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1702 < 1.58$    | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**SAN VITO T12 (in relazione DIASIS 2012: Stazione HVSR – T12)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## SAN VITO T12

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 01/08/12 16:46:51 End recording: 01/08/12 17:32:50

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 52% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $0.94 \pm 0.28$  Hz (in the range 0.0 - 40.0 Hz).

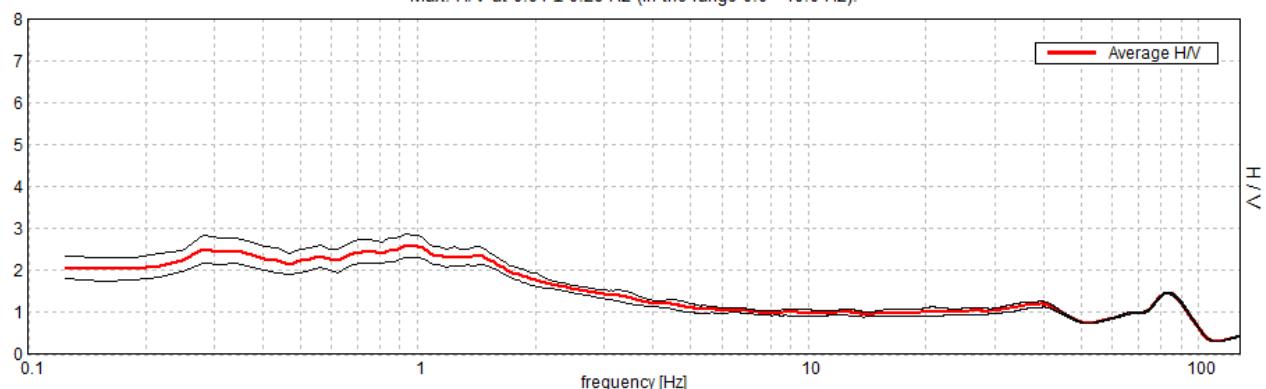


### H/V TIME HISTORY

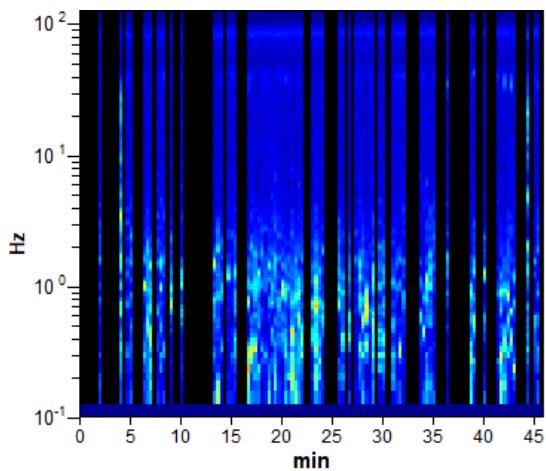


### DIRECTIONAL H/V

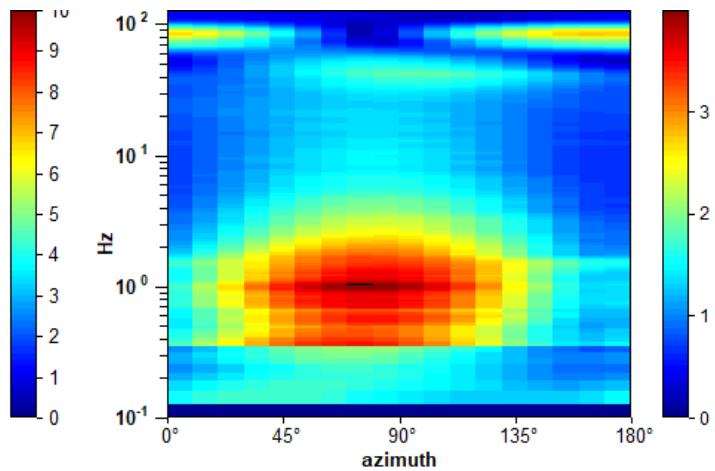

## SINGLE COMPONENT SPECTRA

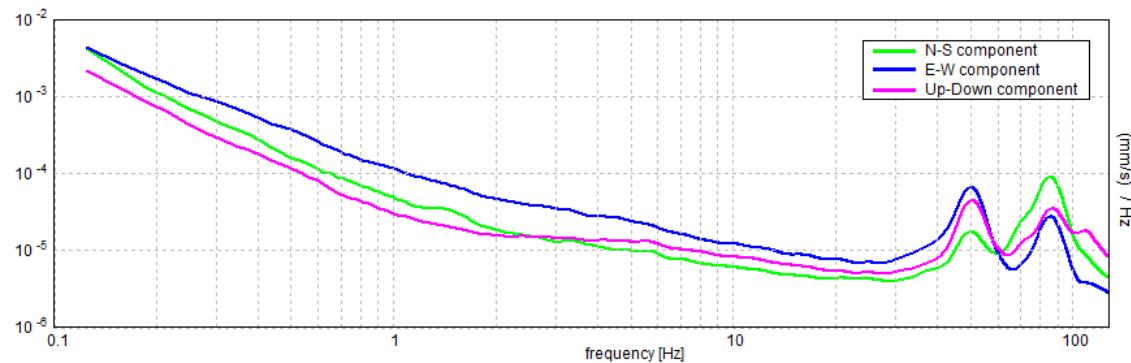


## EXPERIMENTAL vs. SYNTHETIC H/V

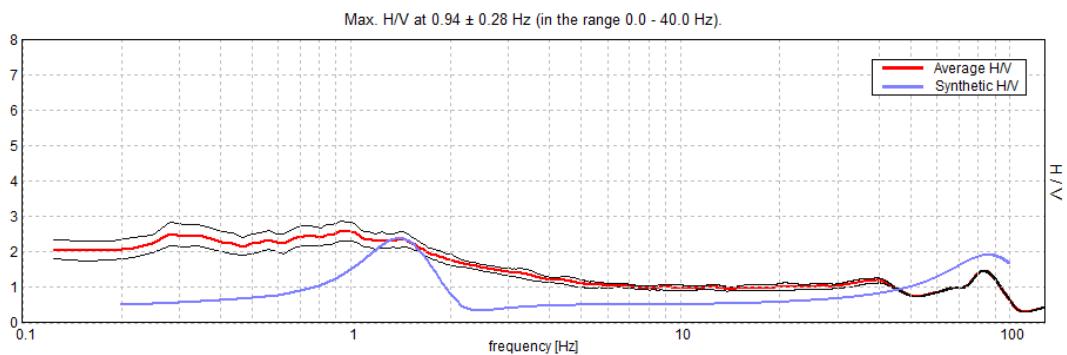

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 1.10                                 | 1.10          | 400      | 0.39          |
| 141.10                               | 140.00        | 800      | 0.39          |
| inf.                                 | inf.          | 1580     | 0.40          |

$$Vs(0.0-30.0) = 772 \text{ m/s}$$

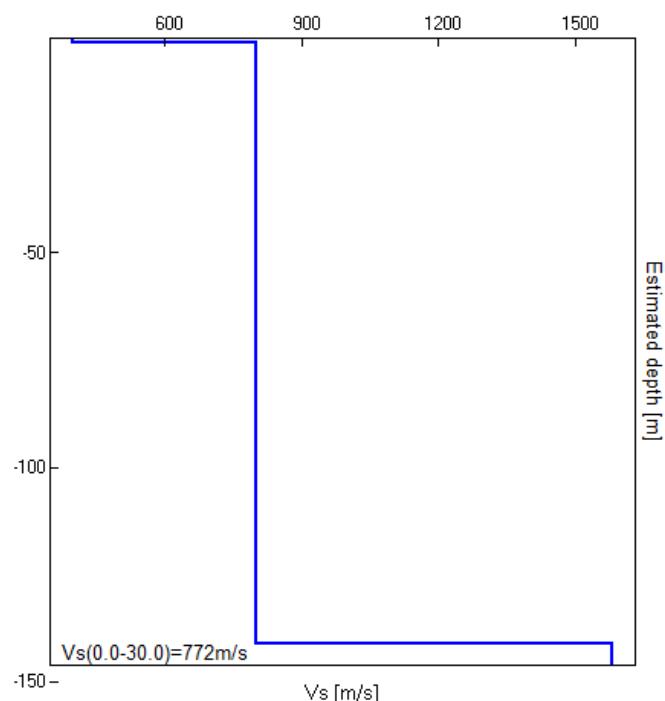

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $0.94 \pm 0.28$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                            |    |  |
|--|----------------------------|----|--|
| $f_0 > 10 / L_w$   | $0.94 > 0.50$              | OK |  |
| $n_c(f_0) > 200$   | $1350.0 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 46 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]


|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                     |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 3.625 Hz            | OK |    |
| $A_0 > 2$   | $2.60 > 2$          | OK |    |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.29982  < 0.05$  |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $0.28108 < 0.14063$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.2781 < 2.0$      | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**SAN VITO T13 (in relazione DIASIS 2012: Stazione HVSR – T31)**

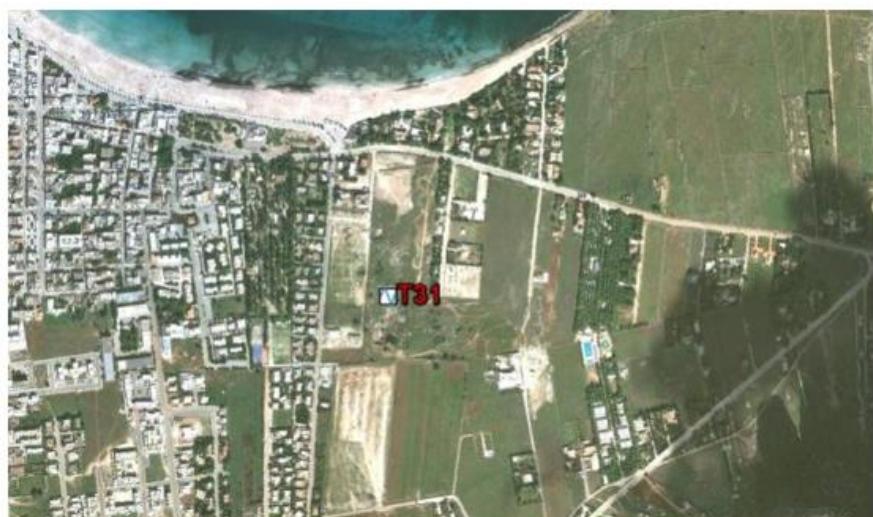

\*sito acquisizione e posizione in vista satellitare da DIASIS 2012

## SAN VITO T13

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 05/09/12 11:36:28 End recording: 05/09/12 12:22:28

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 63% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $13.31 \pm 1.23$  Hz (in the range 0.0 - 40.0 Hz).

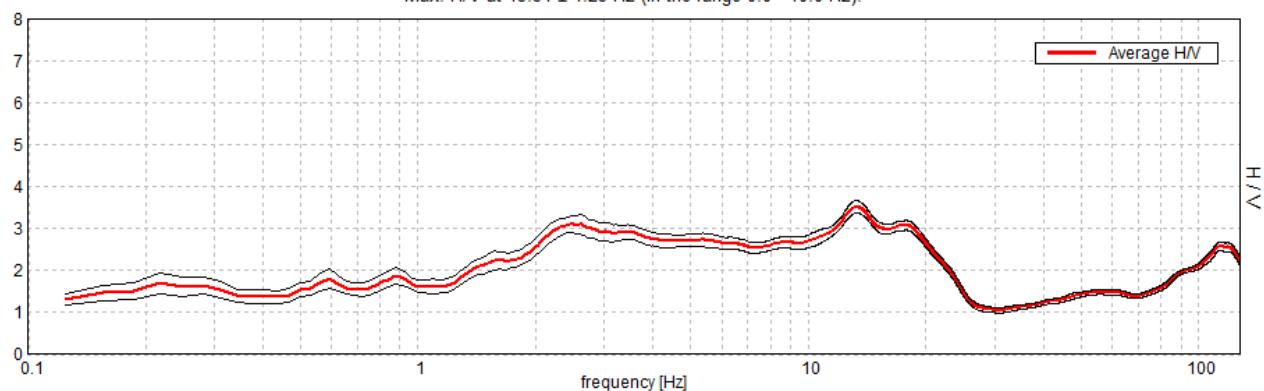


### H/V TIME HISTORY

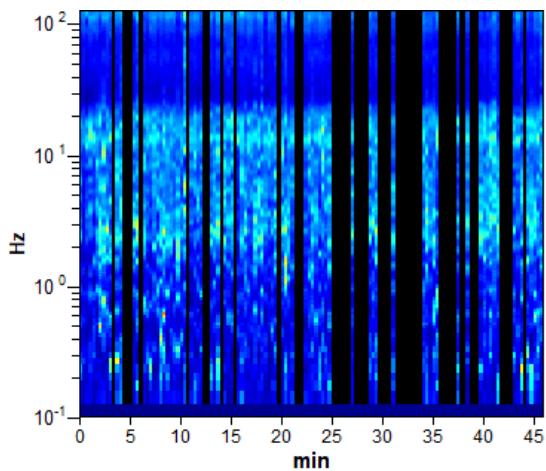

### DIRECTIONAL H/V

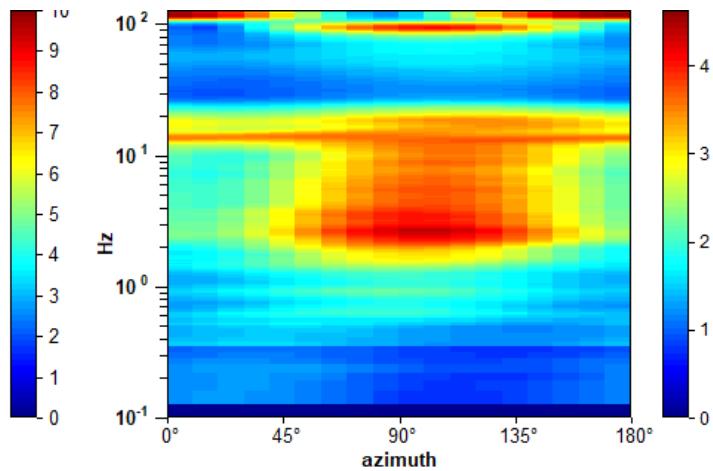


## SINGLE COMPONENT SPECTRA

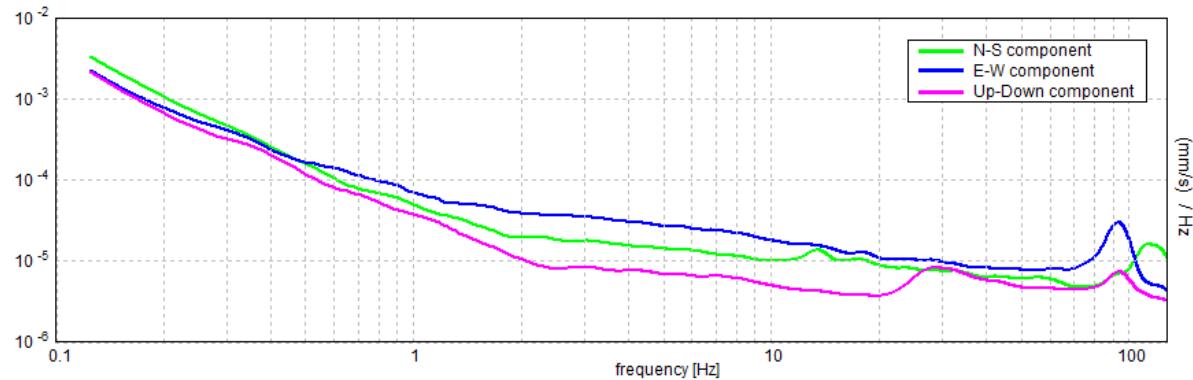

## EXPERIMENTAL vs. SYNTHETIC H/V

Max. H/V at  $13.31 \pm 1.23$  Hz. (In the range 0.0 - 40.0 Hz).

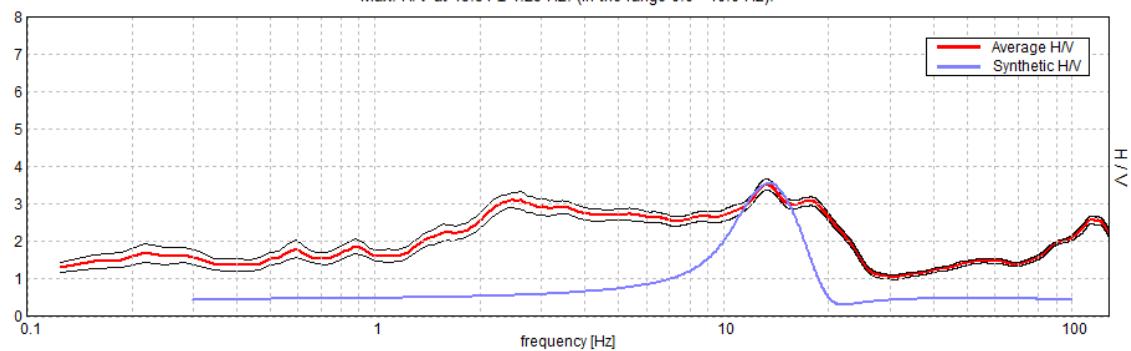

**Depth at the bottom of the layer [m]**

7.30  
inf.

**Thickness [m]**

7.30  
inf.


**Vs [m/s]**

380  
920

**Poisson ratio**

0.35  
0.35

$\text{Vs}(0.0-30.0)=684 \text{ m/s}$

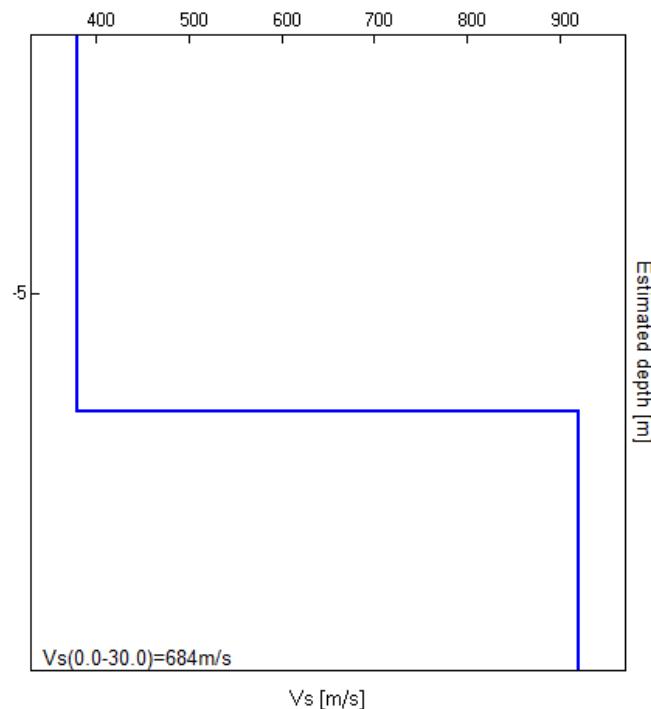

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $13.31 \pm 1.23$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                             |    |  |
|--|-----------------------------|----|--|
| $f_0 > 10 / L_w$   | $13.31 > 0.50$              | OK |  |
| $n_c(f_0) > 200$   | $23163.8 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5$ Hz<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5$ Hz | Exceeded 0 out of 640 times | OK |  |

**Criteria for a clear H/V peak**


[At least 5 out of 6 should be fulfilled]

|   |                     |    |  |
|---|---------------------|----|--|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                     | NO |  |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 23.938 Hz           | OK |  |
| $A_0 > 2$   | $3.52 > 2$          | OK |  |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.09261  < 0.05$  | NO |  |
| $\sigma_f < \varepsilon(f_0)$                             | $1.23291 < 0.66563$ | NO |  |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.147 < 1.58$      | OK |  |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

| Threshold values for $\sigma_f$ and $\sigma_A(f_0)$ |            |           |            |            |            |
|---|------------|-----------|------------|------------|------------|
| Freq. range [Hz]                                    | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
| $\varepsilon(f_0)$ [Hz]                             | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$                   | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$     | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**SAN VITO T14 (in relazione DIASIS 2012: Stazione HVSR – T32)**

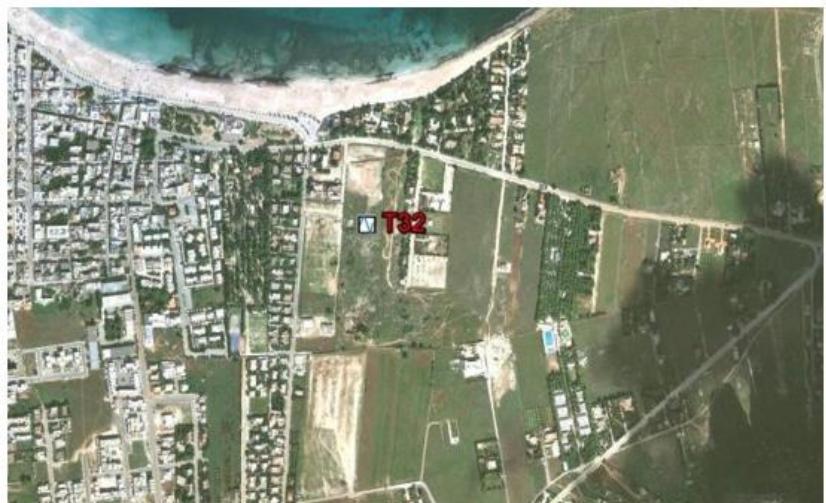

**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## SAN VITO T14

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 05/09/12 11:42:27 End recording: 05/09/12 12:28:27

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 21% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $11.88 \pm 1.91$  Hz (in the range 0.0 - 40.0 Hz).

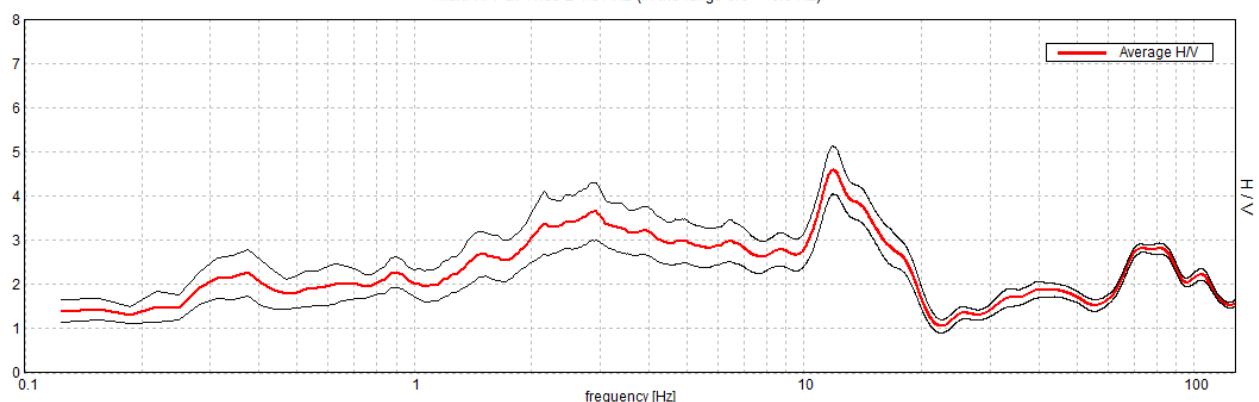


### H/V TIME HISTORY

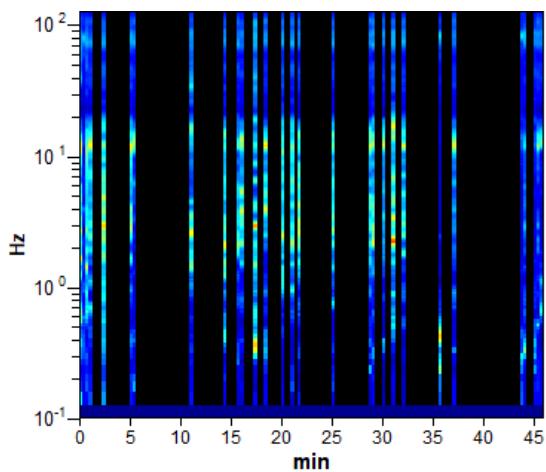


### DIRECTIONAL H/V

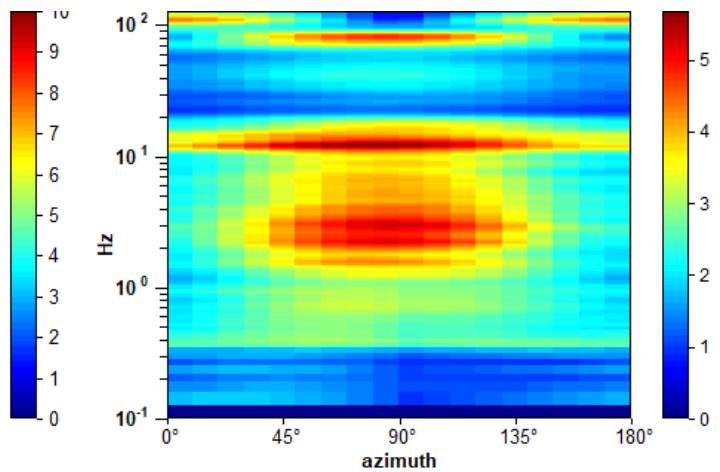

## SINGLE COMPONENT SPECTRA

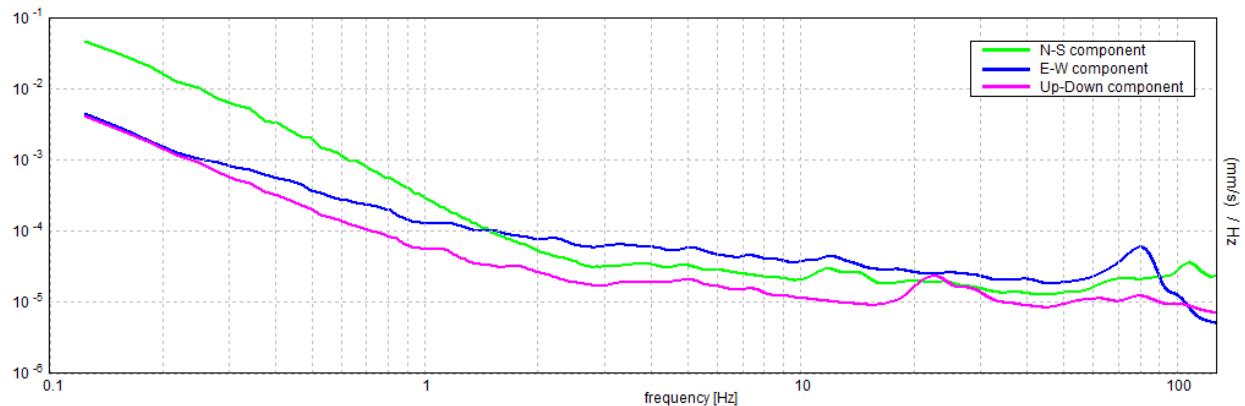


## EXPERIMENTAL vs. SYNTHETIC H/V

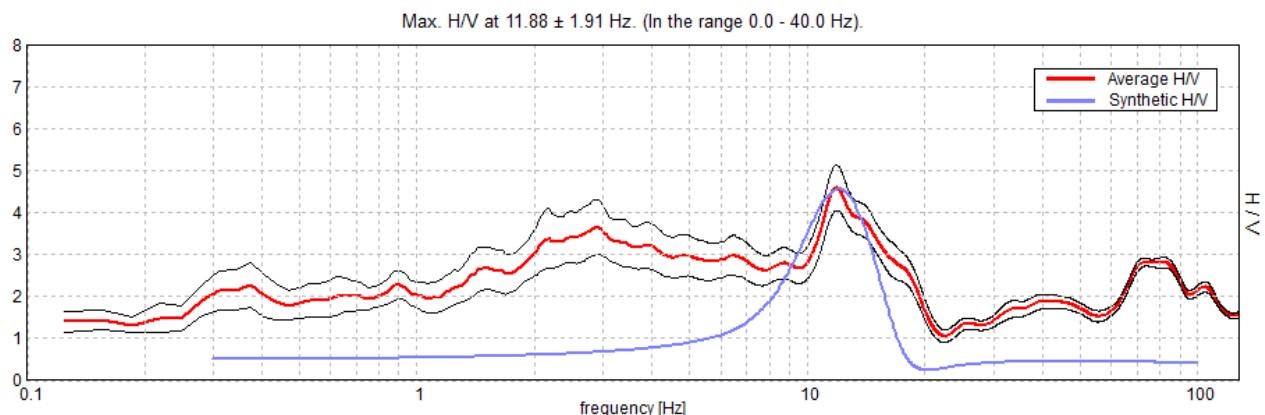

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 8.00                                 | 8.00          | 368      | 0.45          |
| inf.                                 | inf.          | 800      | 0.25          |

$Vs(0.0-30.0)=609$  m/s

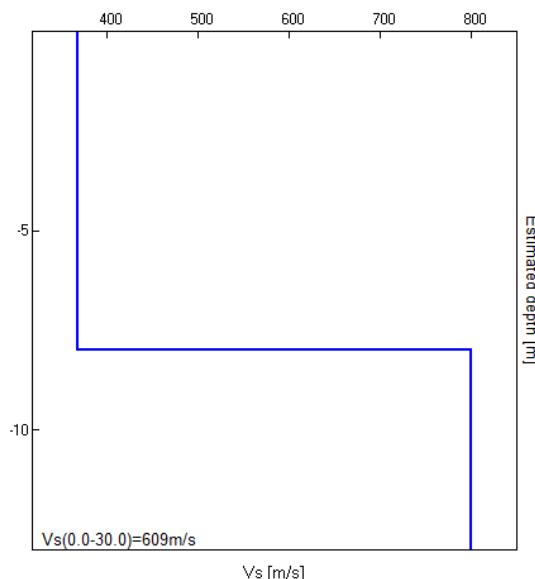

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $11.88 \pm 1.91$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                             |    |  |
|--|-----------------------------|----|--|
| $f_0 > 10 / L_w$   | $11.88 > 0.50$              | OK |  |
| $n_c(f_0) > 200$   | $6887.5 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 571 times | OK |  |

**Criteria for a clear H/V peak**


[At least 5 out of 6 should be fulfilled]

|   |                     |    |  |
|---|---------------------|----|--|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                     | NO |  |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 18.844 Hz           | OK |  |
| $A_0 > 2$   | $4.59 > 2$          | OK |  |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.1608  < 0.05$   | NO |  |
| $\sigma_f < \varepsilon(f_0)$                             | $1.90945 < 0.59375$ | NO |  |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.544 < 1.58$      | OK |  |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

| Threshold values for $\sigma_f$ and $\sigma_A(f_0)$ |            |           |            |            |            |
|---|------------|-----------|------------|------------|------------|
| Freq. range [Hz]                                    | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
| $\varepsilon(f_0)$ [Hz]                             | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$                   | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$     | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**MACARI T15 (in relazione DIASIS 2012: Stazione HVSR – T13)**

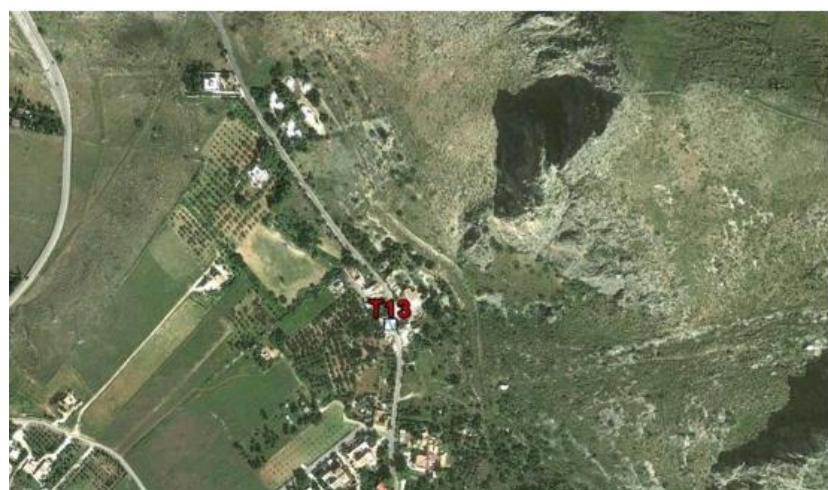

**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## MACARI T15

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 03/08/12 13:17:11 End recording: 03/08/12 14:03:11

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 91% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $15.75 \pm 1.6$  Hz (in the range 0.0 - 40.0 Hz).

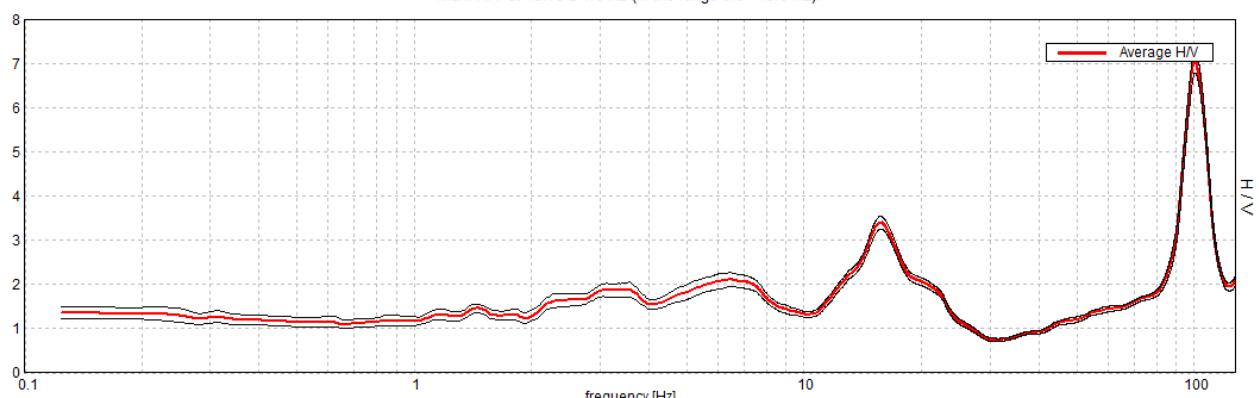


### H/V TIME HISTORY

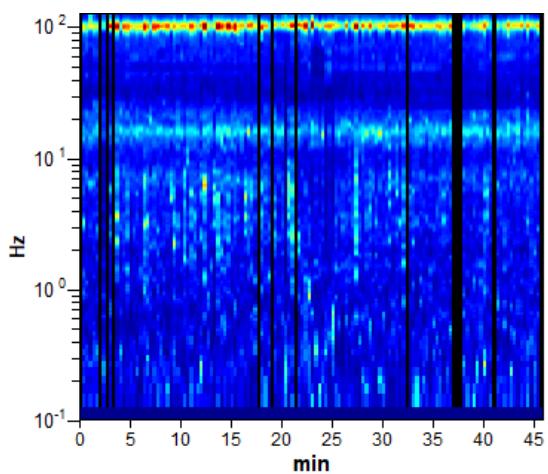


### DIRECTIONAL H/V

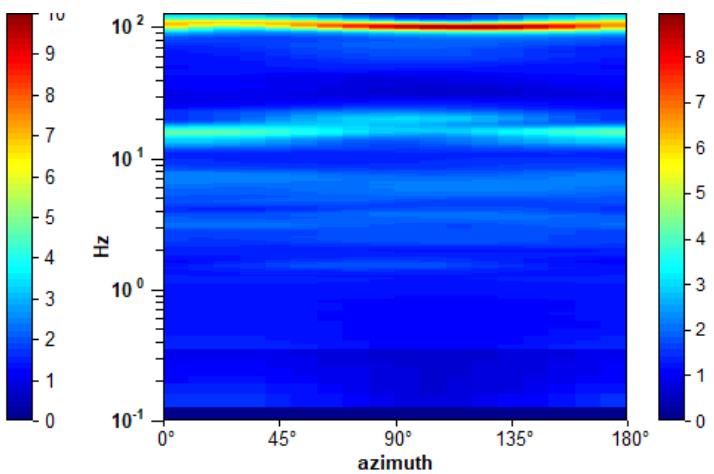

## SINGLE COMPONENT SPECTRA

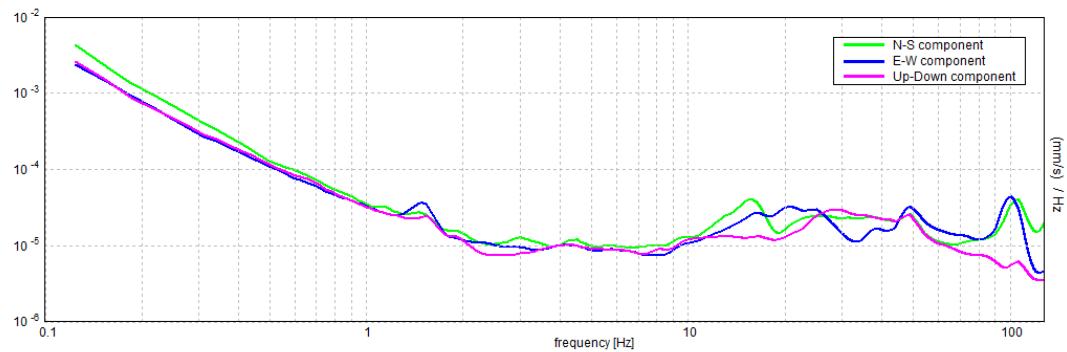


## EXPERIMENTAL vs. SYNTHETIC H/V

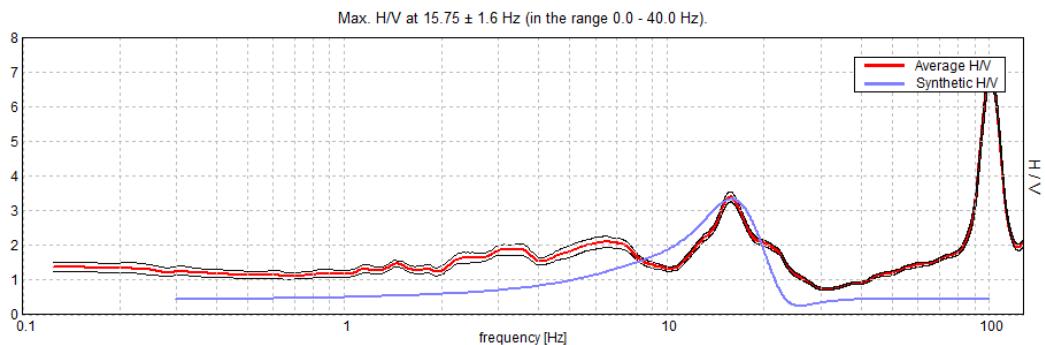

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 5.80                                 | 5.80          | 350      | 0.40          |
| 25.80                                | 20.00         | 800      | 0.40          |
| inf.                                 | inf.          | 1000     | 0.40          |

$Vs(0.0-30.0)=655$  m/s

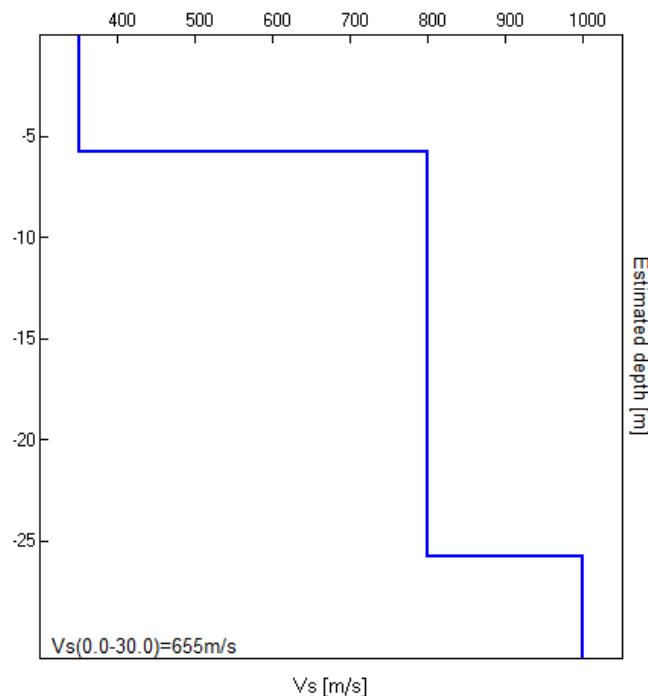

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $15.75 \pm 1.6$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                             |    |  |
|--|-----------------------------|----|--|
| $f_0 > 10 / L_w$   | $15.75 > 0.50$              | OK |  |
| $n_c(f_0) > 200$   | $39375.0 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5$ Hz<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5$ Hz | Exceeded 0 out of 757 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]


|   |                    |    |    |
|---|--------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ | 11.688 Hz          | OK |    |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 22.781 Hz          | OK |    |
| $A_0 > 2$   | $3.40 > 2$         | OK |    |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.10149  < 0.05$ |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $1.59839 < 0.7875$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1431 < 1.58$    | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**MACARI T16 (in relazione DIASIS 2012: Stazione HVSR – T14)**

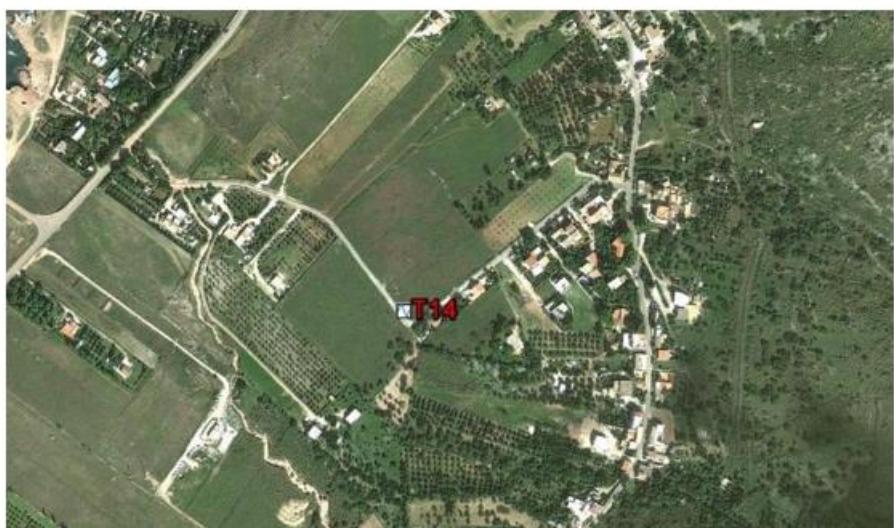

**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## MACARI T16

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 03/08/12 13:45:21 End recording: 03/08/12 14:31:21

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 35% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $39.97 \pm 9.83$  Hz (in the range 0.0 - 40.0 Hz).

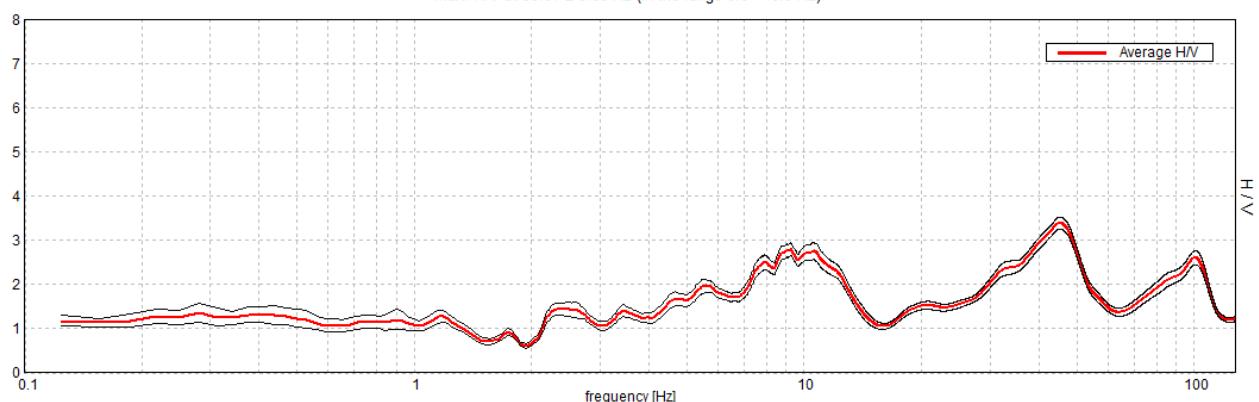


### H/V TIME HISTORY

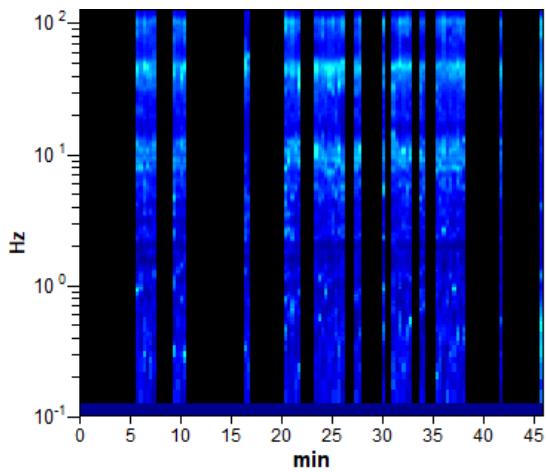


### DIRECTIONAL H/V

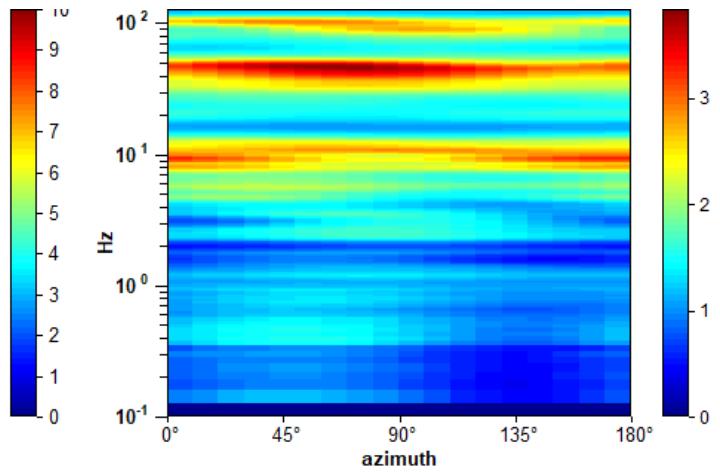

## SINGLE COMPONENT SPECTRA

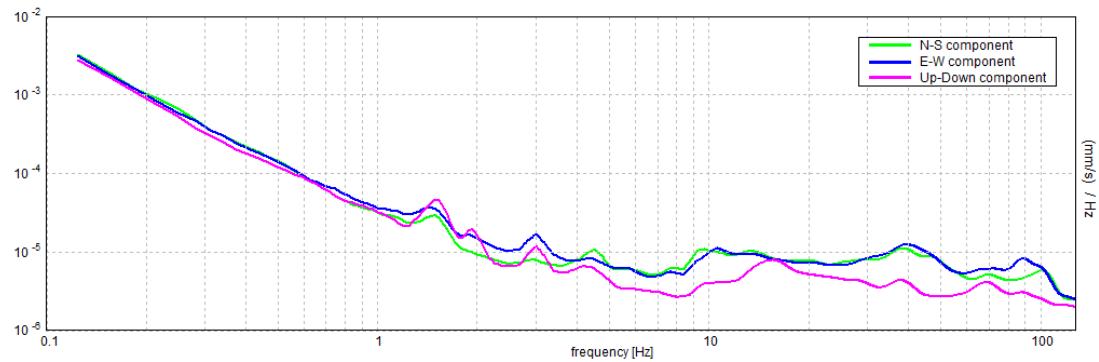


## EXPERIMENTAL vs. SYNTHETIC H/V

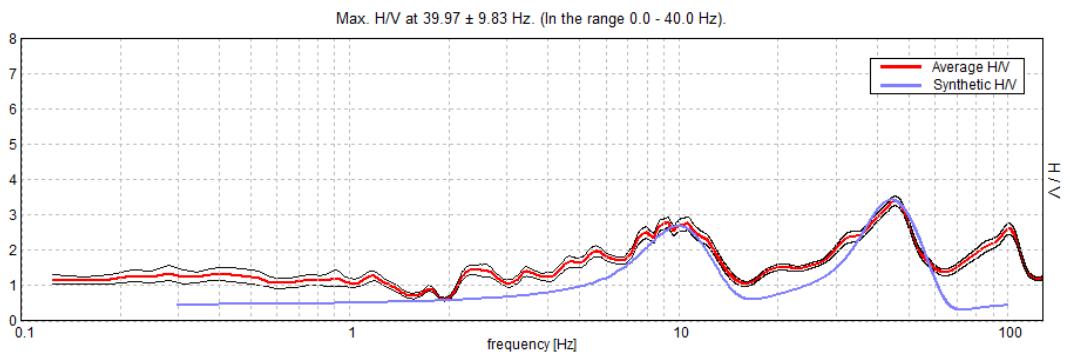

| Depth at the bottom of the layer [m] | Thickness [m] | $\text{Vs}$ [m/s] | Poisson ratio |
|--------------------------------------|---------------|-------------------|---------------|
| 1.22                                 | 1.22          | 208               | 0.35          |
| 12.72                                | 11.50         | 500               | 0.35          |
| inf.                                 | inf.          | 1050              | 0.35          |

$\text{Vs}(0.0-30.0) = 662 \text{ m/s}$

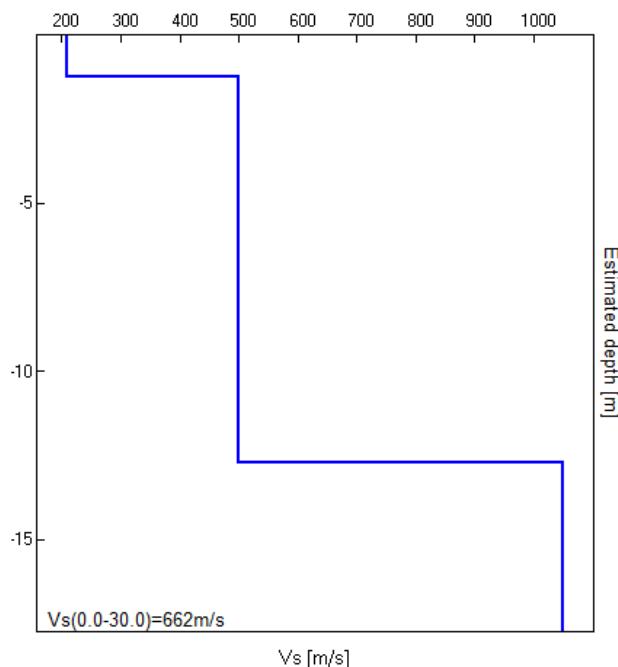

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $39.97 \pm 9.83$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                              |    |  |
|--|------------------------------|----|--|
| $f_0 > 10 / L_w$   | $39.97 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $38370.0 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 1920 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]


|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ | 19.156 Hz           | OK |    |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 60.438 Hz           | OK |    |
| $A_0 > 2$   | $2.92 > 2$          | OK |    |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.2459  < 0.05$   |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $9.82818 < 1.99844$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1275 < 1.58$     | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**MACARI T17 (in relazione DIASIS 2012: Stazione HVSR – T15)**

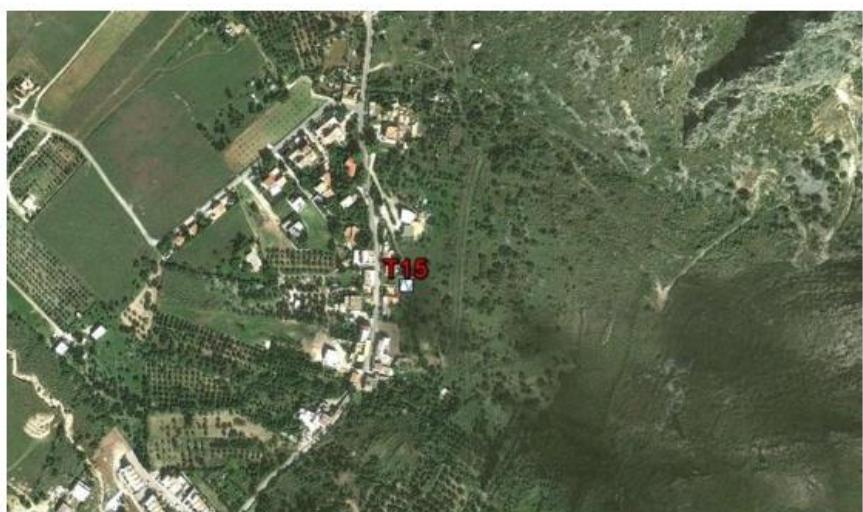

**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## MACARI T17

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 03/08/12 12:47:42 End recording: 03/08/12 13:33:42

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 88% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 39.0  $\pm$  3.49 Hz (in the range 0.0 - 40.0 Hz).

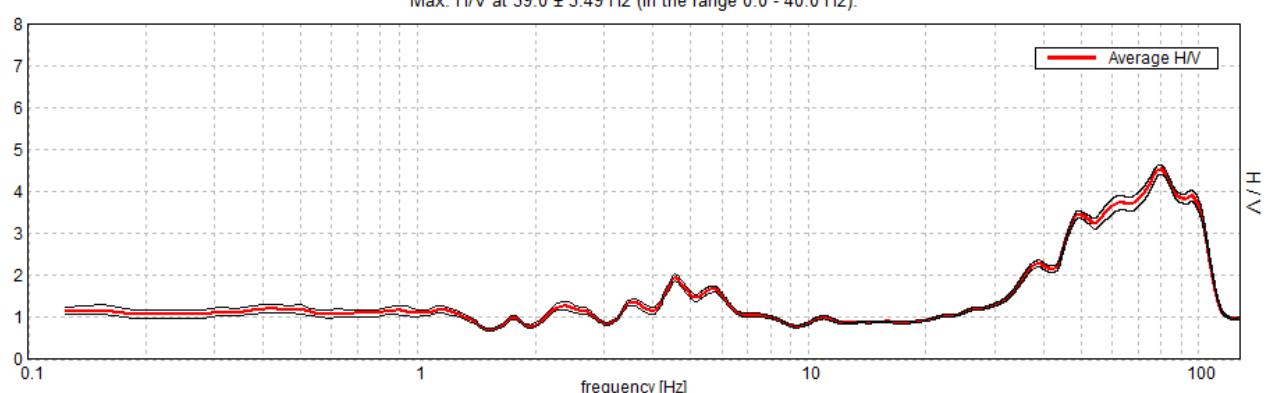


### H/V TIME HISTORY

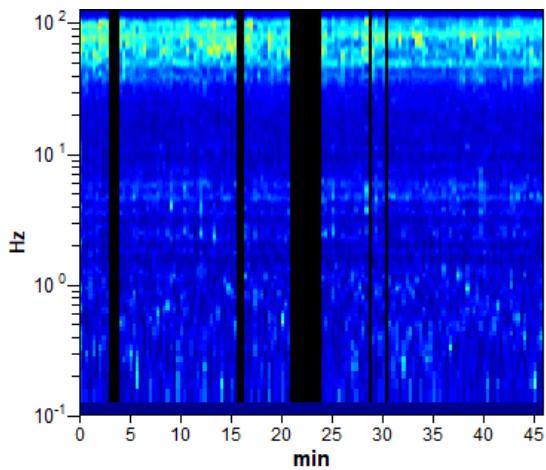

### DIRECTIONAL H/V

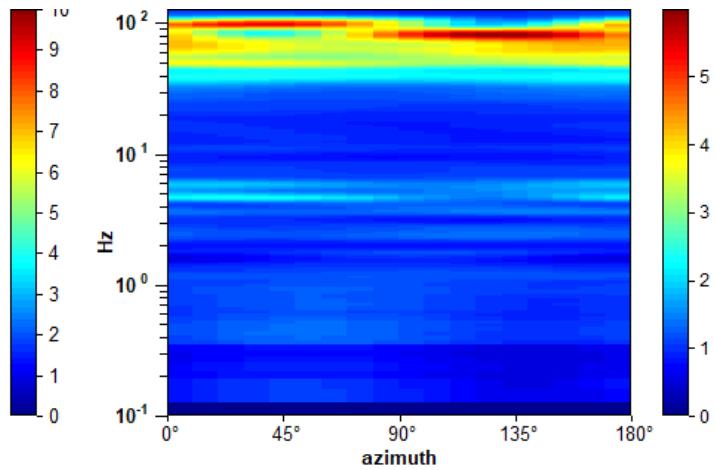

## SINGLE COMPONENT SPECTRA

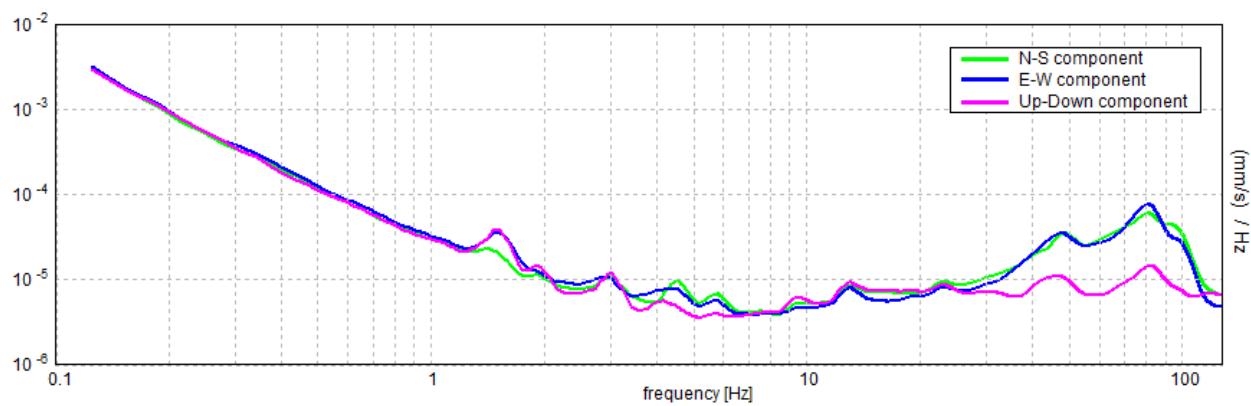

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

**Max. H/V at  $39.0 \pm 3.49$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                              |    |  |
|--|------------------------------|----|--|
| $f_0 > 10 / L_w$   | $39.00 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $95160.0 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 1873 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                   |    |    |
|---|-------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ | 25.313 Hz         | OK |    |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 114.656 Hz        | OK |    |
| $A_0 > 2$   | $2.29 > 2$        | OK |    |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.0896  < 0.05$ |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $3.49451 < 1.95$  |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.0793 < 1.58$   |    |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**MACARI T18 (in relazione DIASIS 2012: Stazione HVSR – T16)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## MACARI T18

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 03/08/12 12:17:02 End recording: 03/08/12 13:03:02

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 94% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $4.5 \pm 1.68$  Hz (in the range 0.0 - 40.0 Hz).

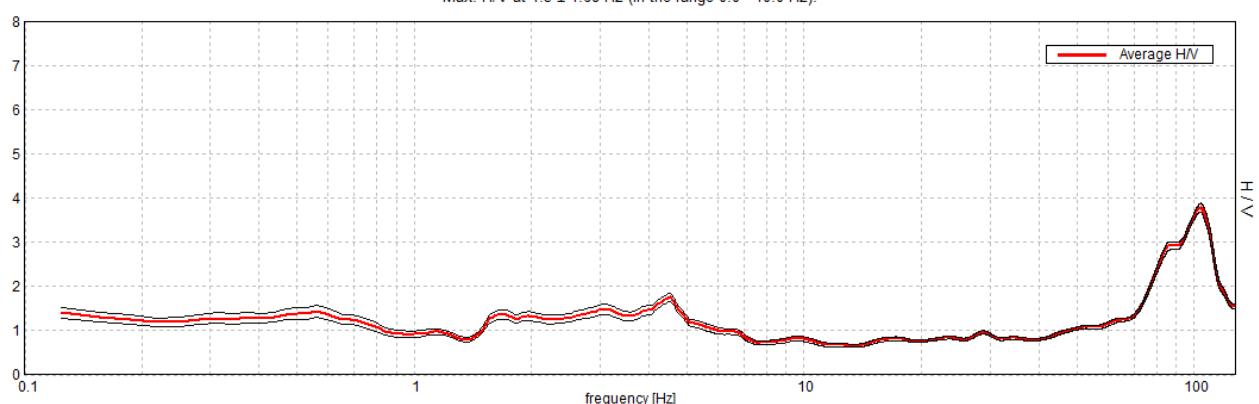


### H/V TIME HISTORY

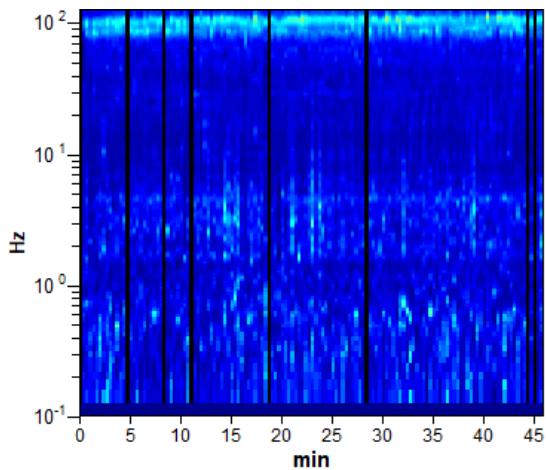

### DIRECTIONAL H/V

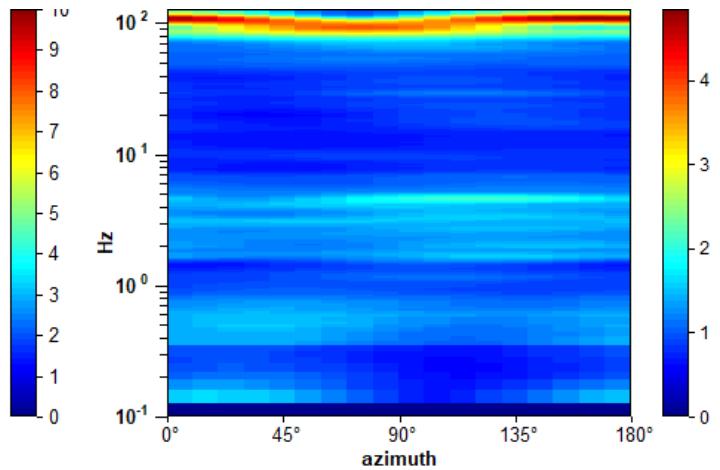

## SINGLE COMPONENT SPECTRA

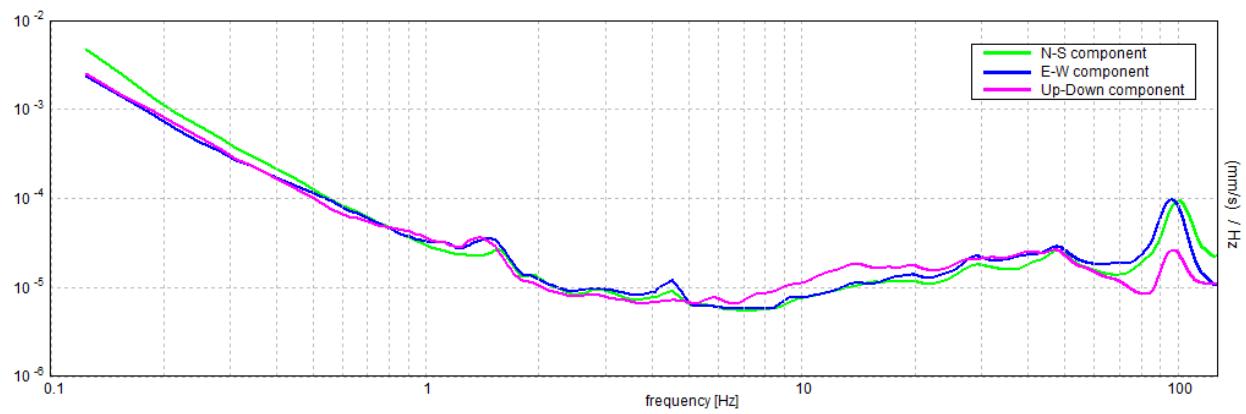

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $4.5 \pm 1.68$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                             |    |  |
|--|-----------------------------|----|--|
| $f_0 > 10 / L_w$   | $4.50 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $11700.0 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 217 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                   |    |    |
|---|-------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ | 1.438 Hz          | OK |    |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 7.0 Hz            | OK |    |
| $A_0 > 2$   | $1.75 > 2$        |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.3744  < 0.05$ |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $1.68481 < 0.225$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.0924 < 1.58$   | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**MACARI T19 (in relazione DIASIS 2012: Stazione HVSR – T17)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## MACARI T19

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 03/08/12 10:30:46 End recording: 03/08/12 11:16:46

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analysis performed on the entire trace.

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $3.06 \pm 0.61$  Hz (in the range 0.0 - 40.0 Hz).

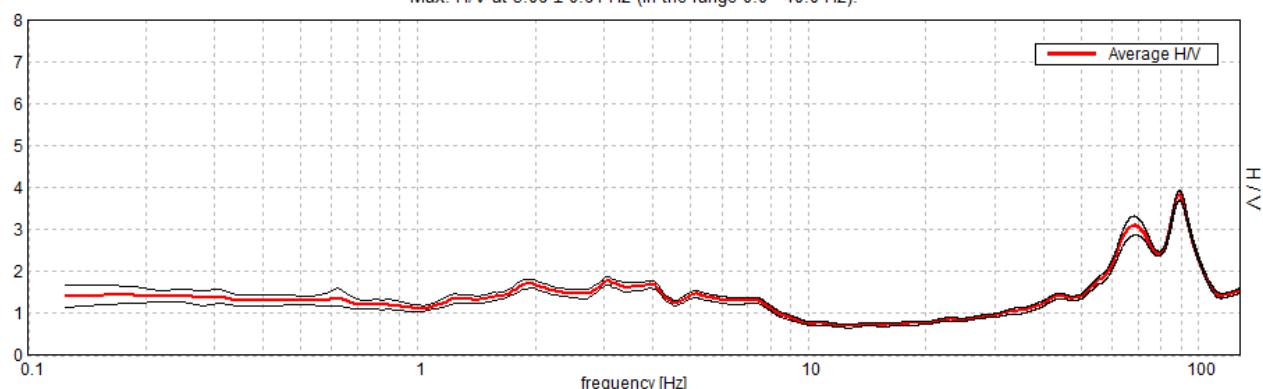


### H/V TIME HISTORY

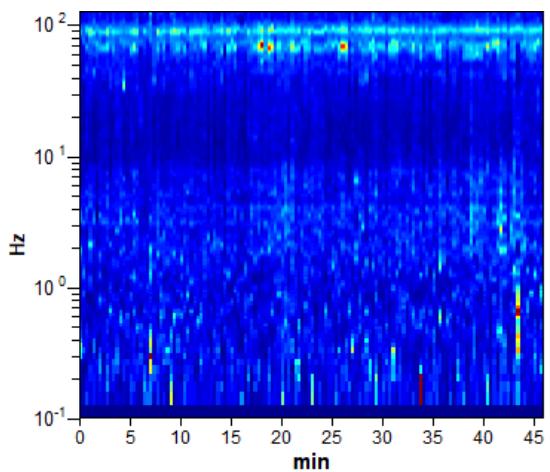


### DIRECTIONAL H/V

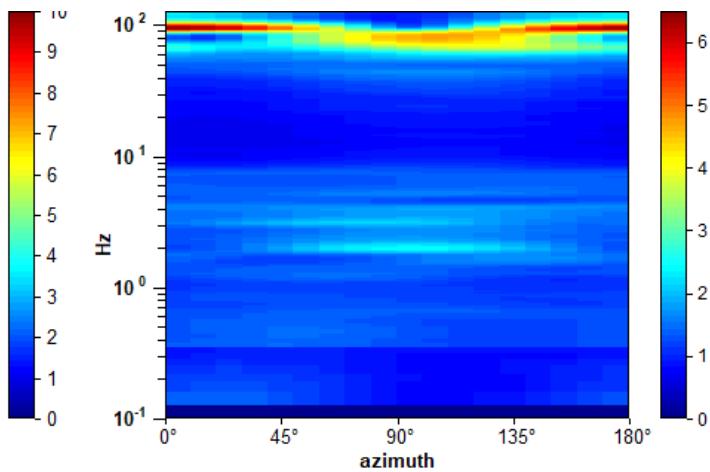

## SINGLE COMPONENT SPECTRA

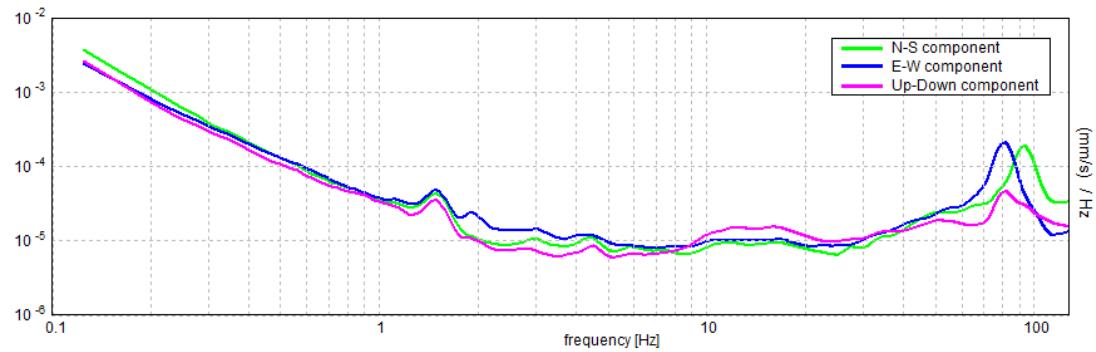


## EXPERIMENTAL vs. SYNTHETIC H/V

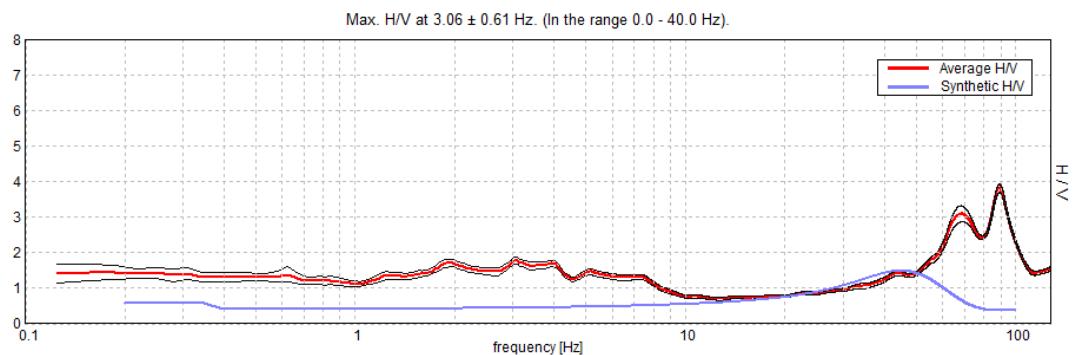

| Depth at the bottom of the layer [m] | Thickness [m] | $V_s$ [m/s] | Poisson ratio |
|--------------------------------------|---------------|-------------|---------------|
| 2.50                                 | 2.50          | 490         | 0.45          |
| inf.                                 | inf.          | 800         | 0.45          |

$V_s(0.0-30.0)=760$ m/s

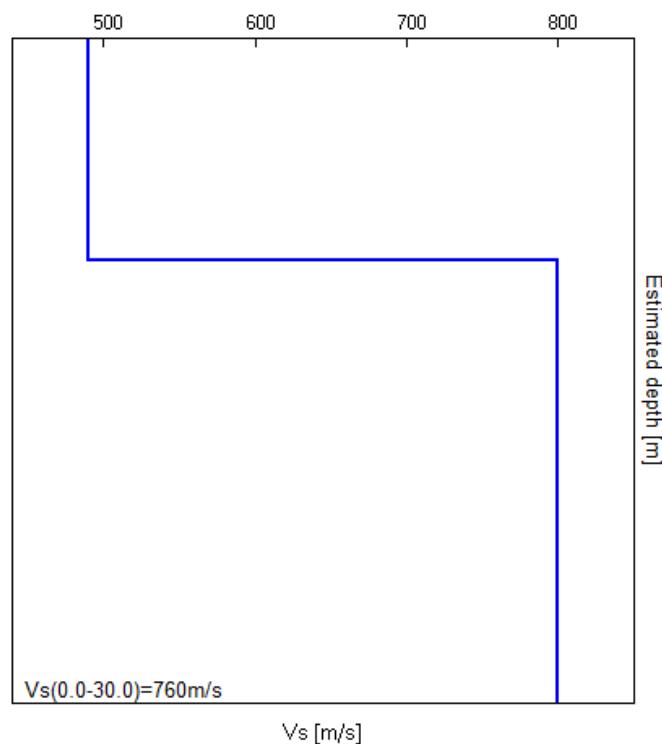

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $3.06 \pm 0.61$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                             |    |  |
|--|-----------------------------|----|--|
| $f_0 > 10 / L_w$   | $3.06 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $8452.5 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 148 times | OK |  |

**Criteria for a clear H/V peak**


[At least 5 out of 6 should be fulfilled]

|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                     |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 9.063 Hz            | OK |    |
| $A_0 > 2$   | $1.78 > 2$          |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.2007  < 0.05$   |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $0.61464 < 0.15313$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.0923 < 1.58$     | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

| Threshold values for $\sigma_f$ and $\sigma_A(f_0)$ |            |           |            |            |            |
|---|------------|-----------|------------|------------|------------|
| Freq. range [Hz]                                    | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
| $\varepsilon(f_0)$ [Hz]                             | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$                   | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$     | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**MACARI T20 (in relazione DIASIS 2012: Stazione HVSR – T18)**

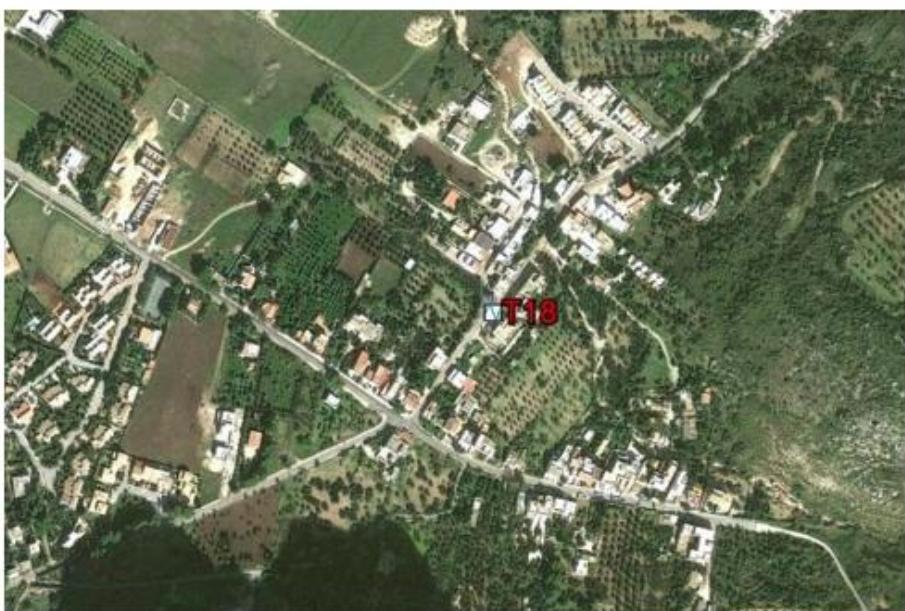

**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## MACARI T20

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 03/08/12 11:32:43 End recording: 03/08/12 12:18:43

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 75% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $4.53 \pm 0.94$  Hz (in the range 0.0 - 40.0 Hz).

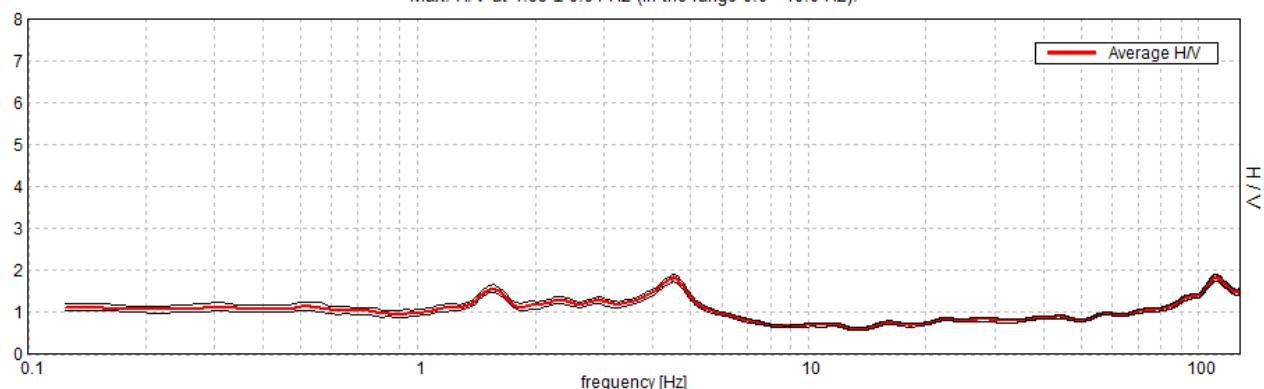


### H/V TIME HISTORY

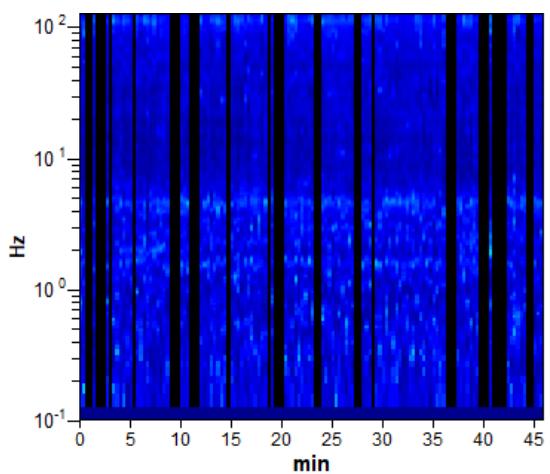

### DIRECTIONAL H/V

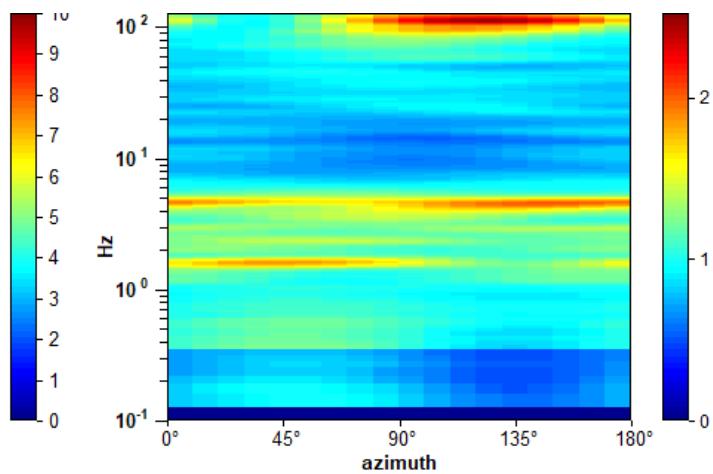

## SINGLE COMPONENT SPECTRA

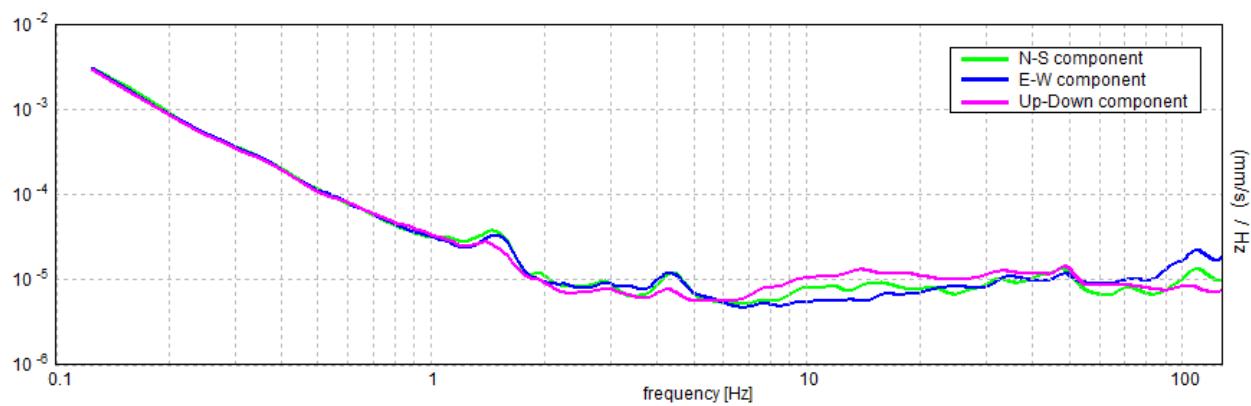

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $4.53 \pm 0.94$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                             |    |  |
|--|-----------------------------|----|--|
| $f_0 > 10 / L_w$   | $4.53 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $9334.4 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 218 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                     |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 6.406 Hz            | OK |    |
| $A_0 > 2$   | $1.83 > 2$          |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.20676  < 0.05$  |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $0.93688 < 0.22656$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.0919 < 1.58$     | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**MACARI T21 (in relazione DIASIS 2012: Stazione HVSR – T19)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## MACARI T21

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 03/08/12 11:22:11 End recording: 03/08/12 12:08:11

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 78% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $31.56 \pm 2.92$  Hz (in the range 0.0 - 40.0 Hz).

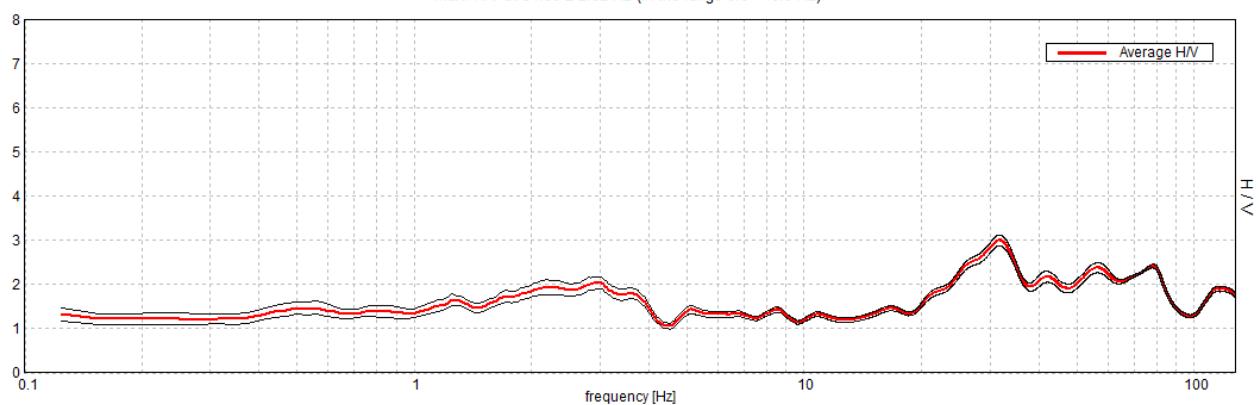


### H/V TIME HISTORY

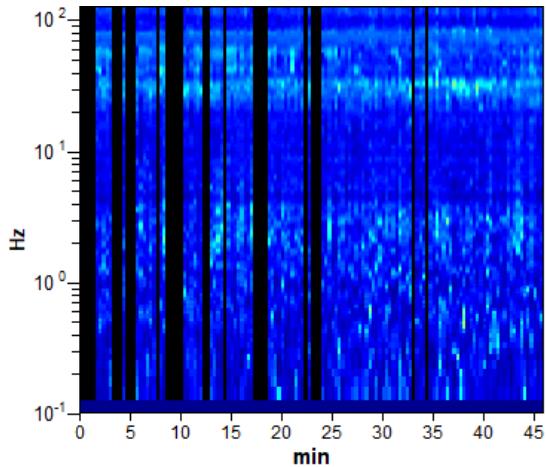


### DIRECTIONAL H/V

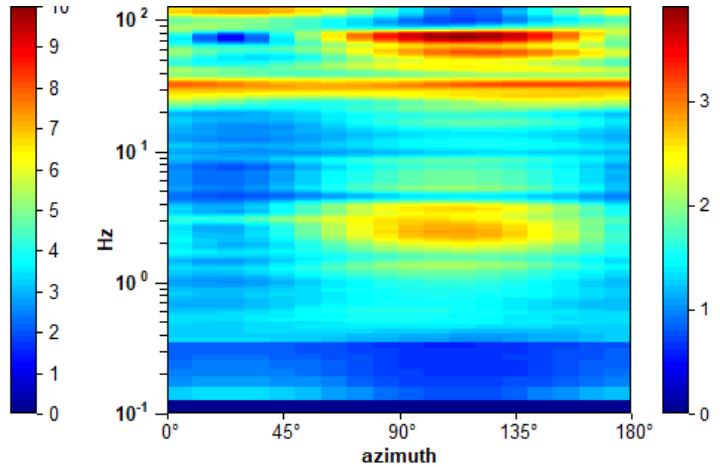

## SINGLE COMPONENT SPECTRA

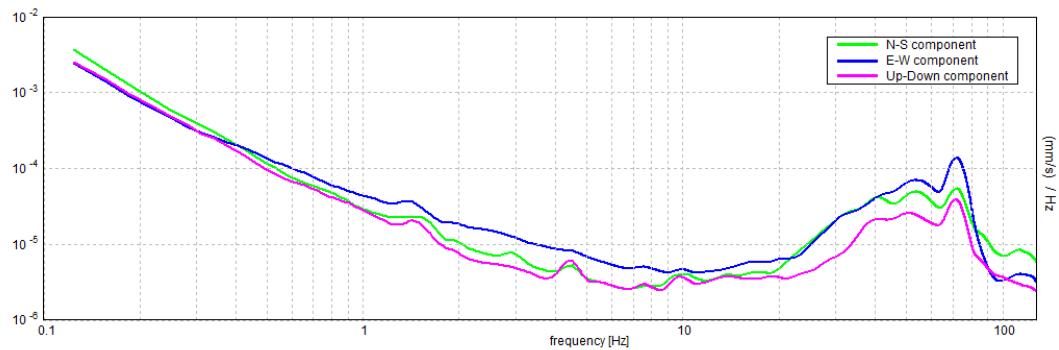


## EXPERIMENTAL vs. SYNTHETIC H/V

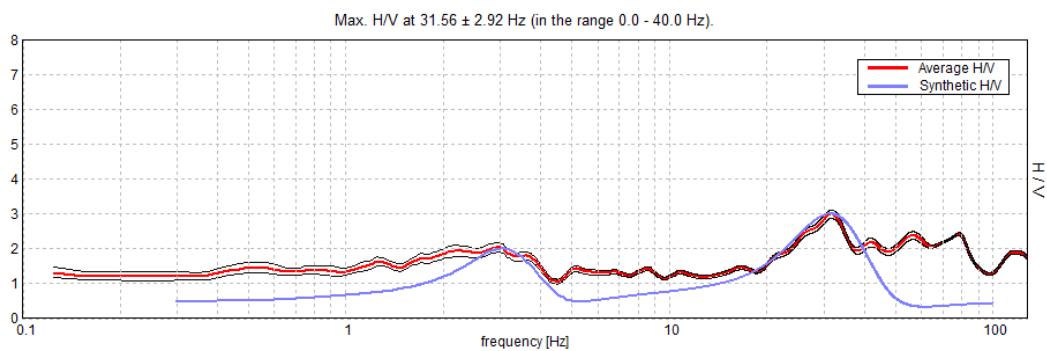

| Depth at the bottom of the layer [m] | Thickness [m] | $\text{Vs}$ [m/s] | Poisson ratio |
|--------------------------------------|---------------|-------------------|---------------|
| 2.40                                 | 2.40          | 367               | 0.45          |
| 4.40                                 | 2.00          | 600               | 0.35          |
| 64.40                                | 60.00         | 800               | 0.35          |
| inf.                                 | inf.          | 1500              | 0.42          |

$$\text{Vs}(0.0-30.0) = 716 \text{ m/s}$$

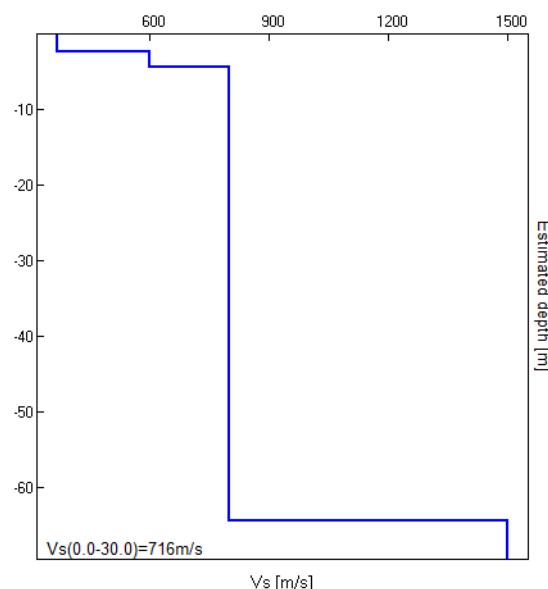

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $31.56 \pm 2.92$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                              |    |  |
|--|------------------------------|----|--|
| $f_0 > 10 / L_w$   | $31.56 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $68175.0 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 1516 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]


|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ | 19.844 Hz           | OK |    |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 89.063 Hz           | OK |    |
| $A_0 > 2$   | $3.00 > 2$          | OK |    |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.09259  < 0.05$  |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $2.92229 < 1.57813$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1188 < 1.58$     | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**MACARI T22 (in relazione DIASIS 2012: Stazione HVSR – T20)**

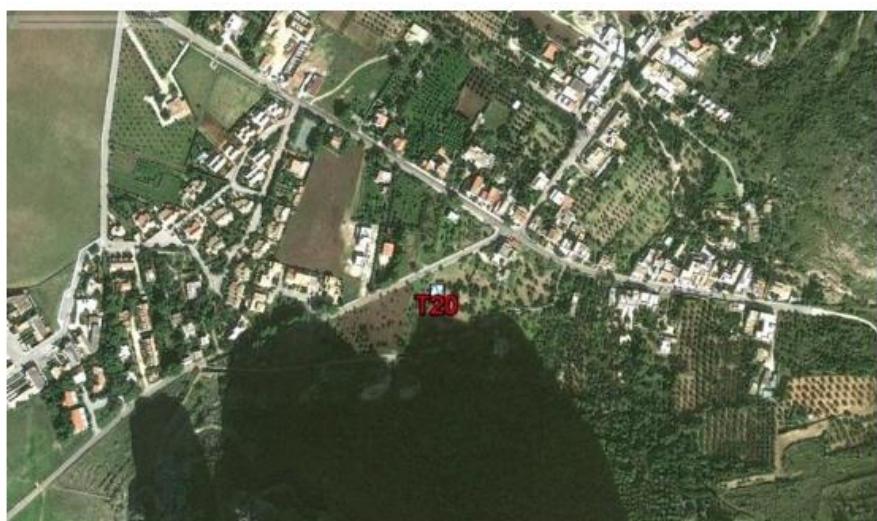

**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## MACARI T22

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 03/08/12 09:23:37 End recording: 03/08/12 10:09:37

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 98% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $4.53 \pm 25.74$  Hz (in the range 0.0 - 40.0 Hz).

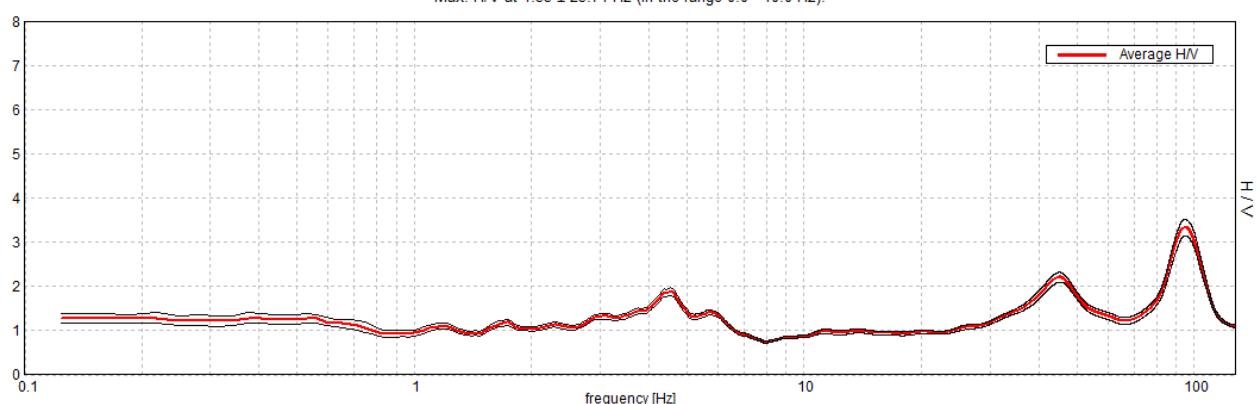


### H/V TIME HISTORY

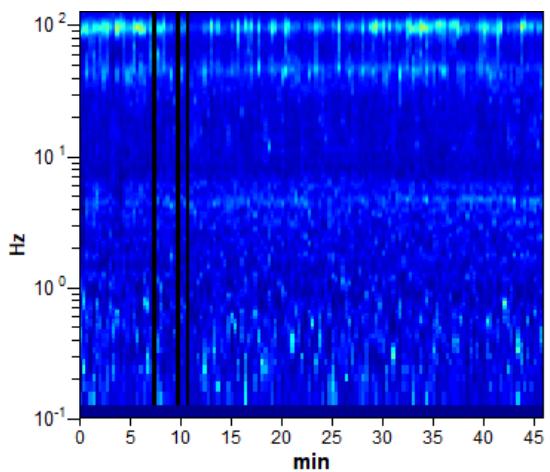


### DIRECTIONAL H/V

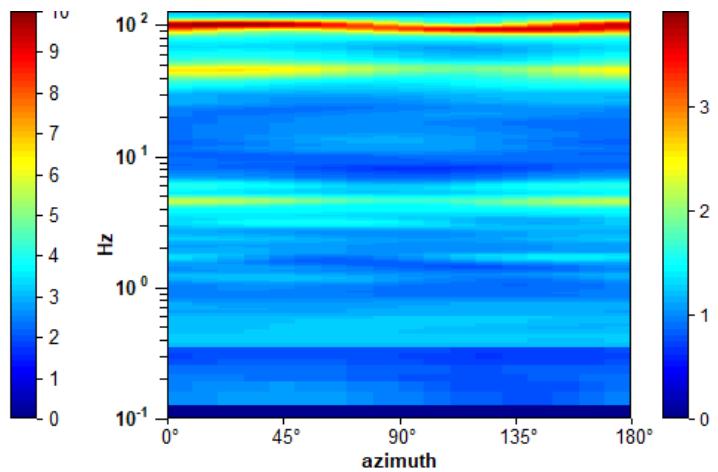

## SINGLE COMPONENT SPECTRA

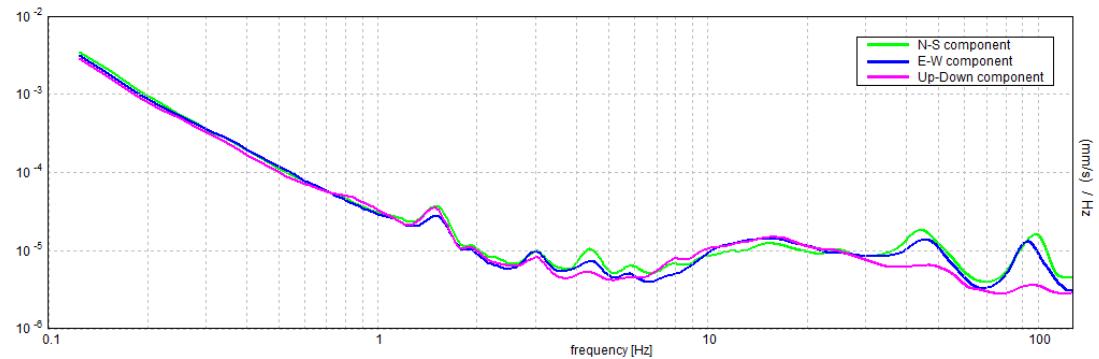


## EXPERIMENTAL vs. SYNTHETIC H/V

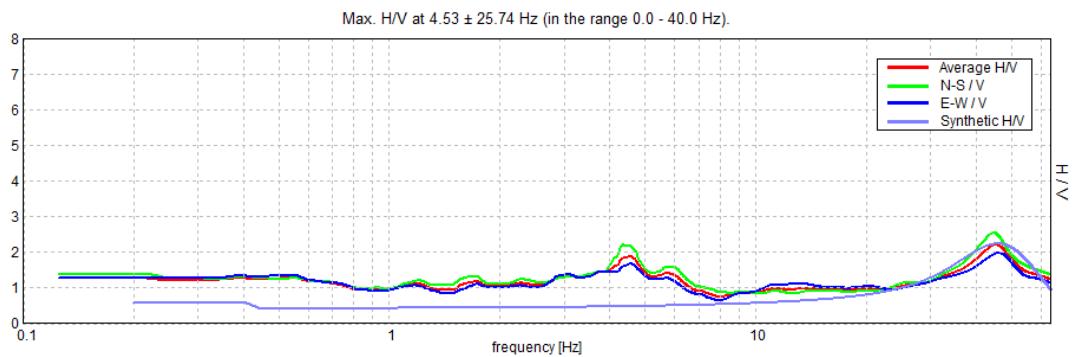

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 2.30                                 | 2.30          | 430      | 0.42          |
| inf.                                 | inf.          | 800      | 0.42          |

$$Vs(0.0-30.0)=750\text{m/s}$$

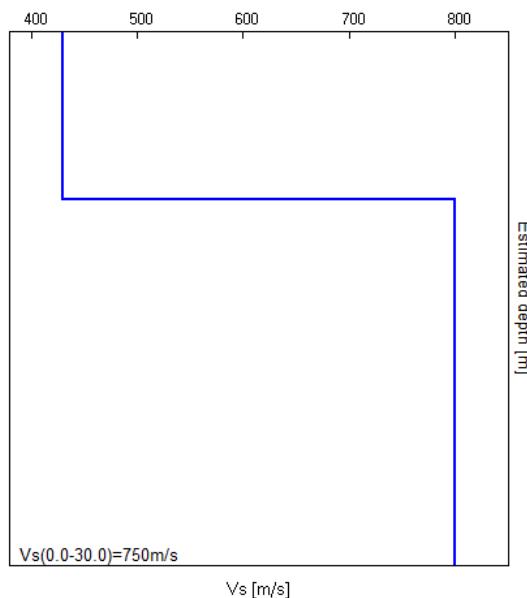

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $4.53 \pm 25.74$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                             |    |  |
|--|-----------------------------|----|--|
| $f_0 > 10 / L_w$   | $4.53 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $12234.4 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 218 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]


|   |                      |    |    |
|---|----------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ | 1.469 Hz             | OK |    |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 6.813 Hz             | OK |    |
| $A_0 > 2$   | $1.88 > 2$           |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 5.67994  < 0.05$   |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $25.73721 < 0.22656$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.0879 < 1.58$      | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**MACARI T23 (in relazione DIASIS 2012: Stazione HVSR – T21)**

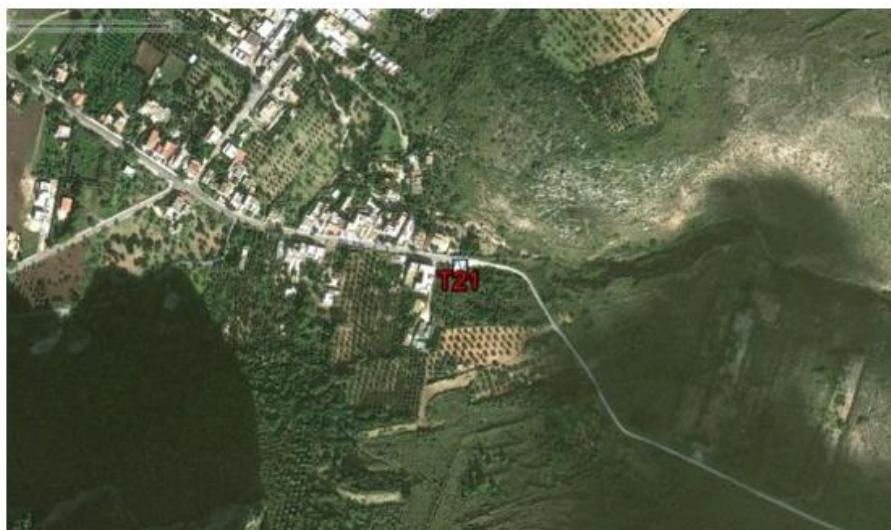

**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## MACARI T23

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 03/08/12 10:23:33 End recording: 03/08/12 11:09:32

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 63% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $4.59 \pm 0.93$  Hz (in the range 0.0 - 40.0 Hz).

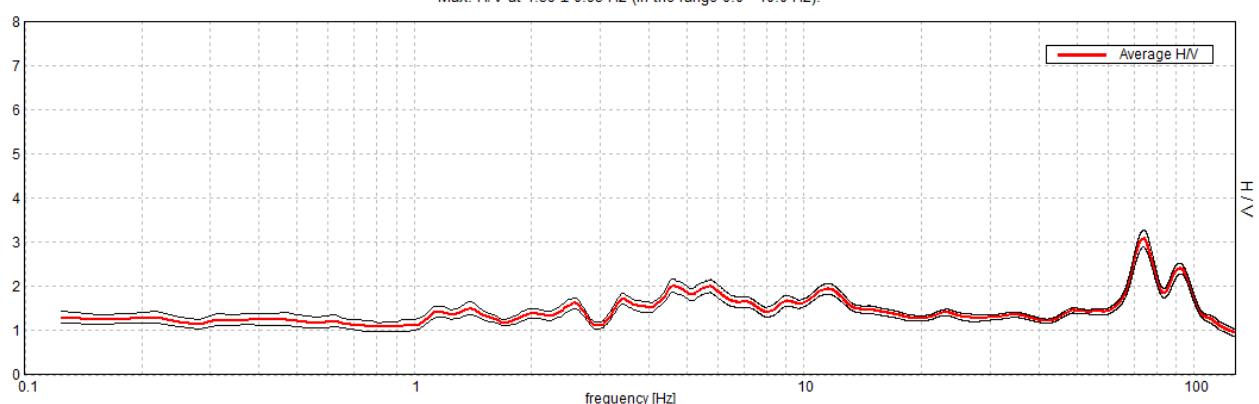


### H/V TIME HISTORY

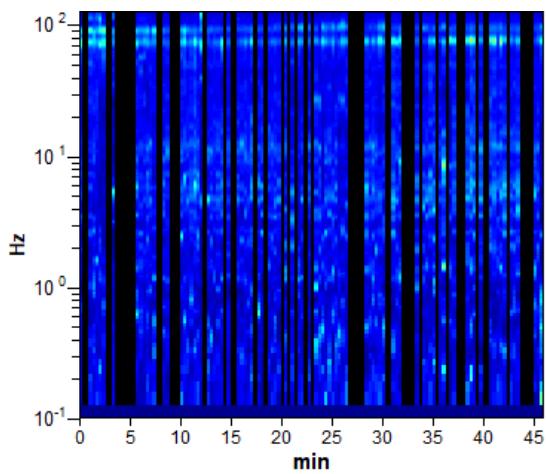

### DIRECTIONAL H/V

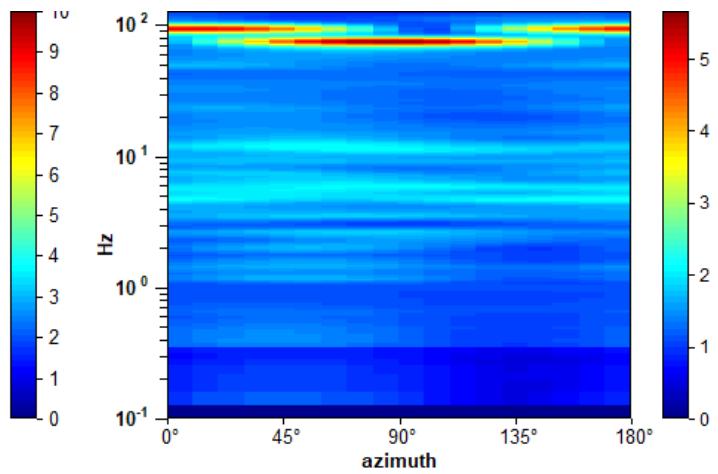


### SINGLE COMPONENT SPECTRA

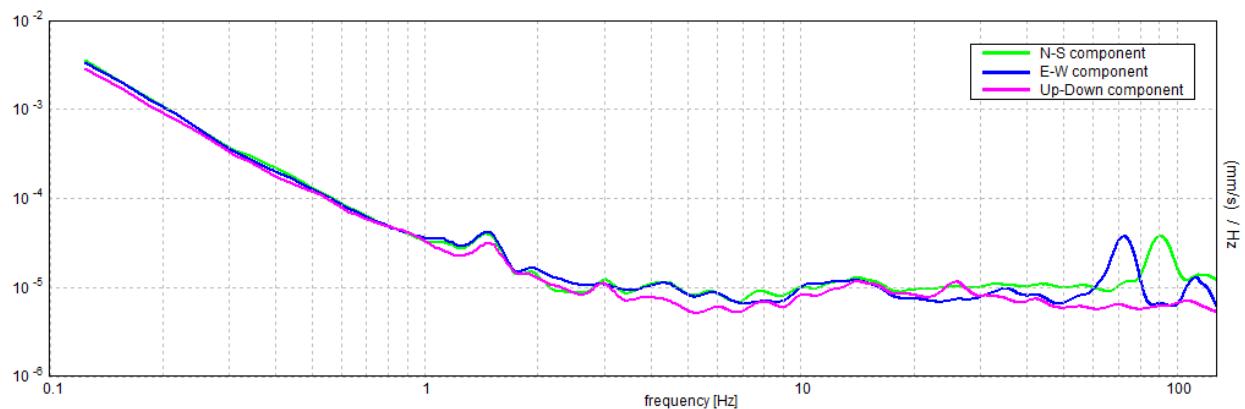


### EXPERIMENTAL vs. SYNTHETIC H/V

Max. H/V at  $4.59 \pm 0.93$  Hz (in the range 0.0 - 40.0 Hz).

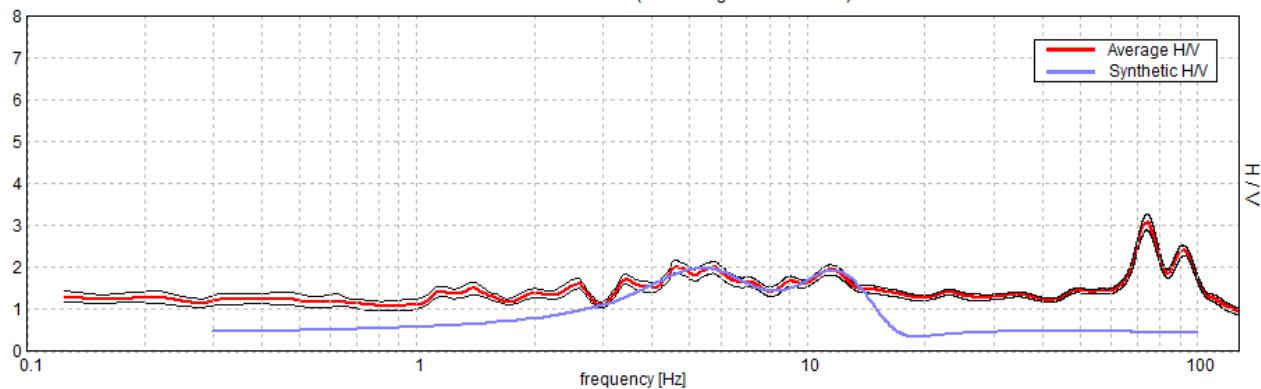

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 7.80                                 | 7.80          | 350      | 0.35          |
| 37.80                                | 30.00         | 800      | 0.35          |
| inf.                                 | inf.          | 1300     | 0.35          |

$Vs(0.0-30.0)=600$  m/s

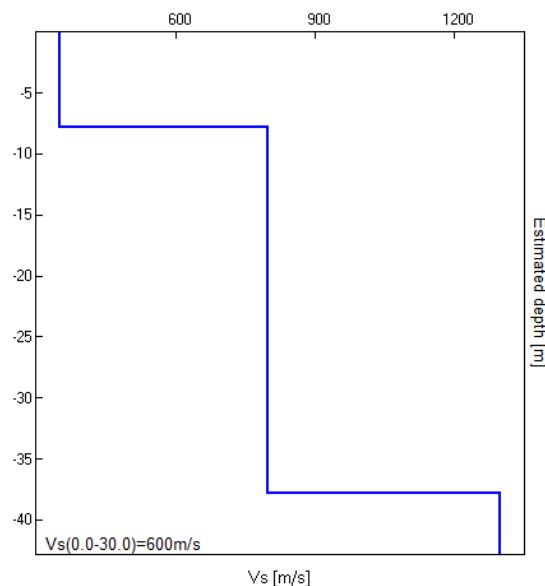

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $4.59 \pm 0.93$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                             |    |  |
|--|-----------------------------|----|--|
| $f_0 > 10 / L_w$   | $4.59 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $7993.1 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 222 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]


|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                     |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  |                     |    | NO |
| $A_0 > 2$   | $2.01 > 2$          | OK |    |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.2031  < 0.05$   |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $0.93297 < 0.22969$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.152 < 1.58$      | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**CASTELLUZZO T24 (in relazione DIASIS 2012: Stazione HVSR – T22)**

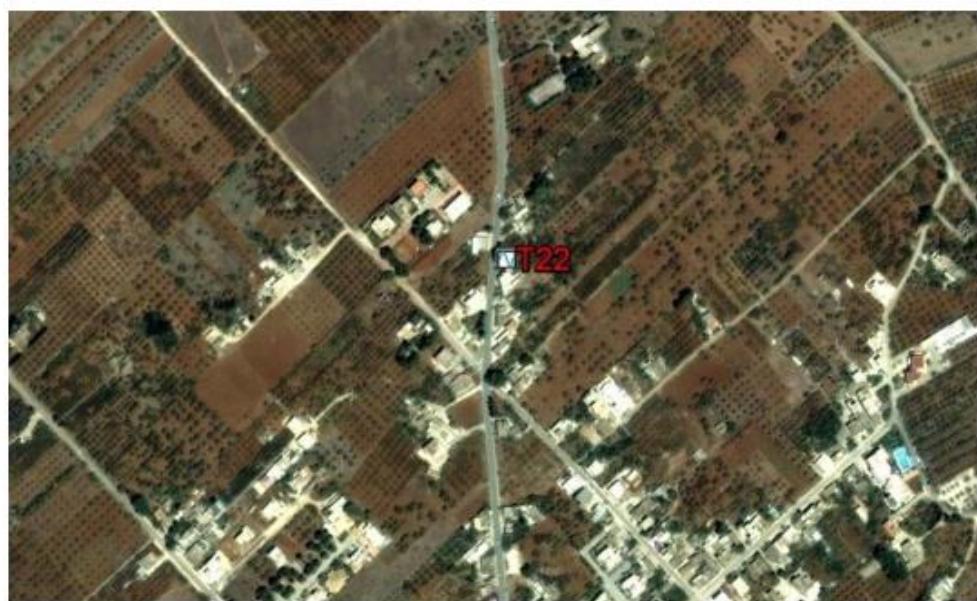

\*sito acquisizione e posizione in vista satellitare da DIASIS 2012

## CASTELLUZZO T24

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 15:26:55 End recording: 02/08/12 16:12:55

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 94% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $1.44 \pm 0.12$  Hz (in the range 0.0 - 40.0 Hz).

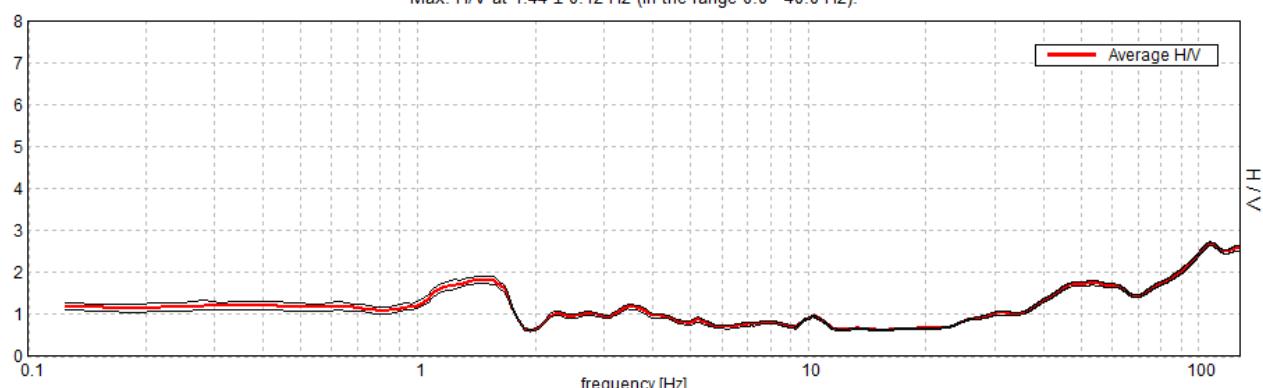


### H/V TIME HISTORY

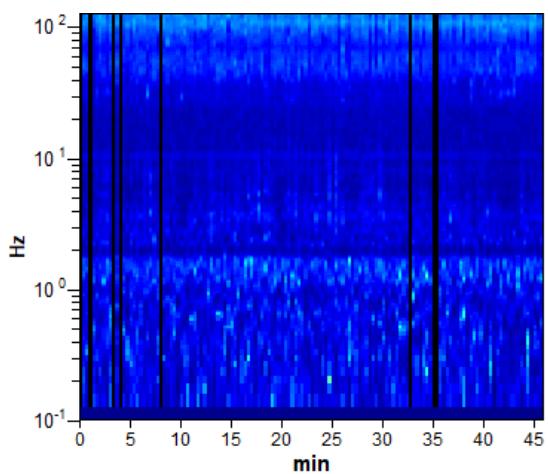

### DIRECTIONAL H/V

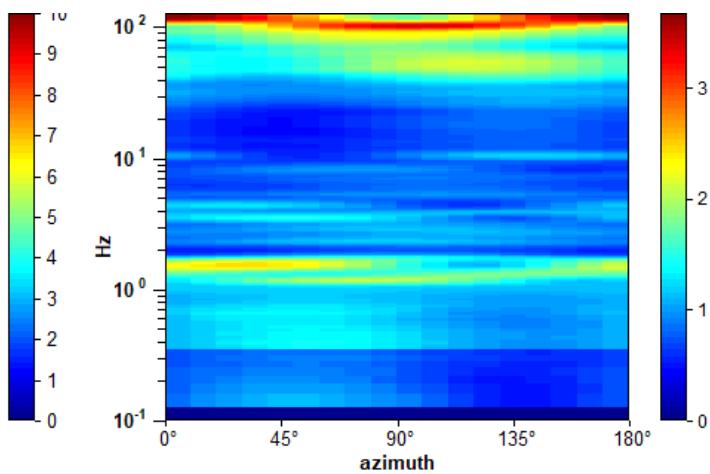

## SINGLE COMPONENT SPECTRA

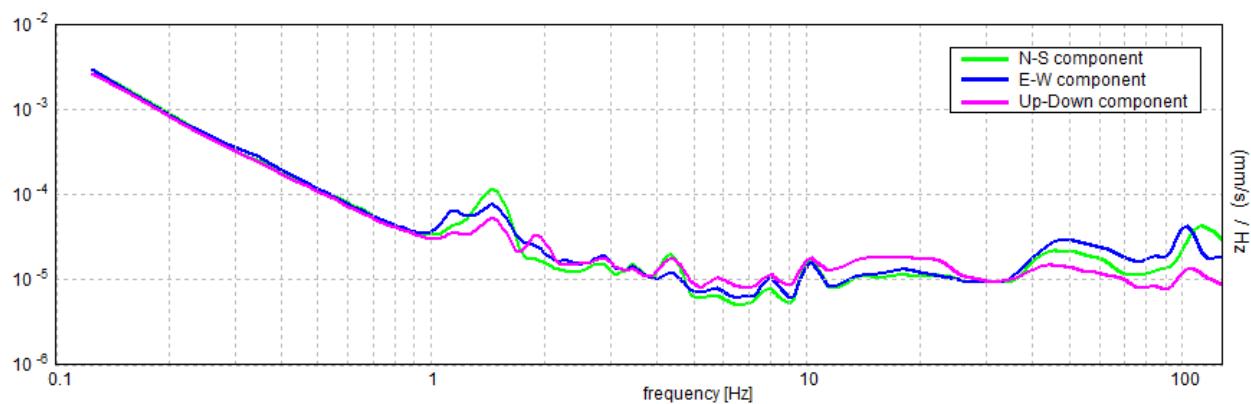

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $1.44 \pm 0.12$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                            |    |  |
|--|----------------------------|----|--|
| $f_0 > 10 / L_w$   | $1.44 > 0.50$              | OK |  |
| $n_c(f_0) > 200$   | $3737.5 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 70 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                     |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 1.813 Hz            | OK |    |
| $A_0 > 2$   | $1.82 > 2$          |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.08012  < 0.05$  |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $0.11518 < 0.14375$ | OK |    |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.0849 < 1.78$     | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

| Threshold values for $\sigma_f$ and $\sigma_A(f_0)$ |            |           |            |            |            |
|---|------------|-----------|------------|------------|------------|
| Freq. range [Hz]                                    | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
| $\varepsilon(f_0)$ [Hz]                             | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$                   | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$     | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**CASTELLUZZO T25 (in relazione DIASIS 2012: Stazione HVSR – T23)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## CASTELLUZZO T25

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 15:40:56 End recording: 02/08/12 16:26:56

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 90% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $1.25 \pm 0.16$  Hz (in the range 0.0 - 40.0 Hz).

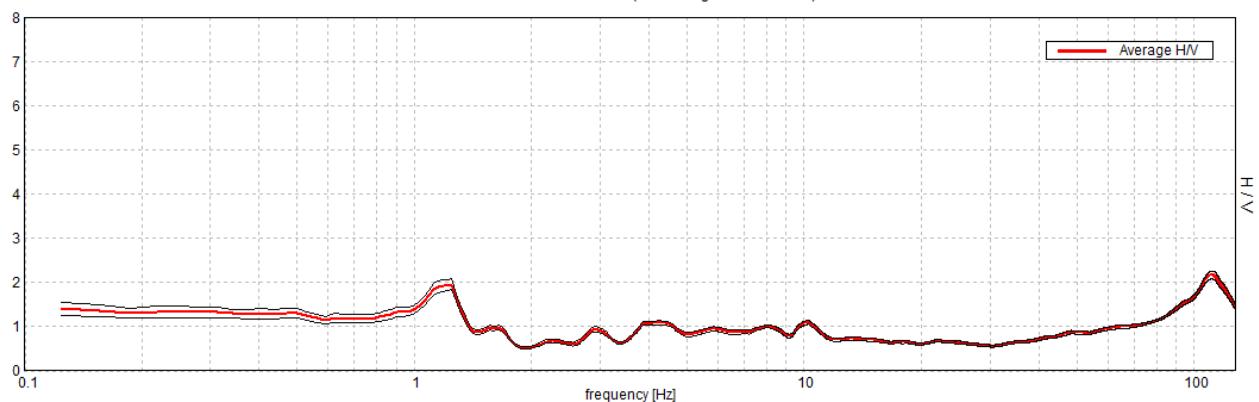


### H/V TIME HISTORY

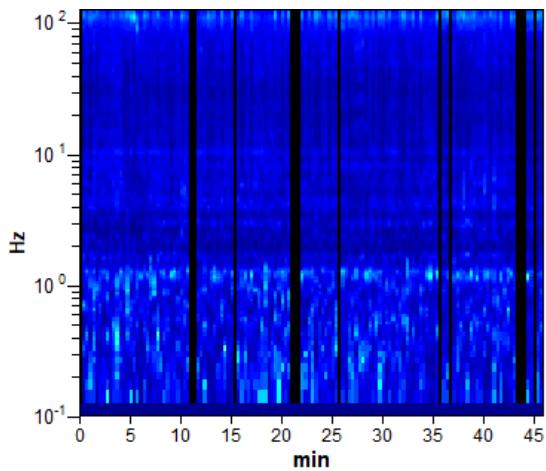


### DIRECTIONAL H/V

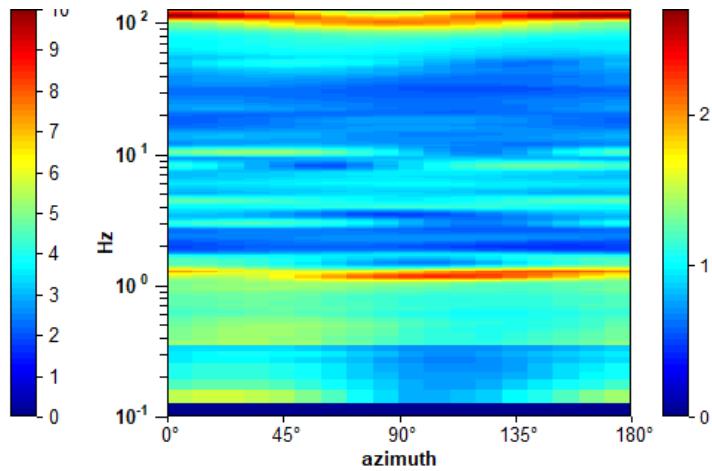

## SINGLE COMPONENT SPECTRA

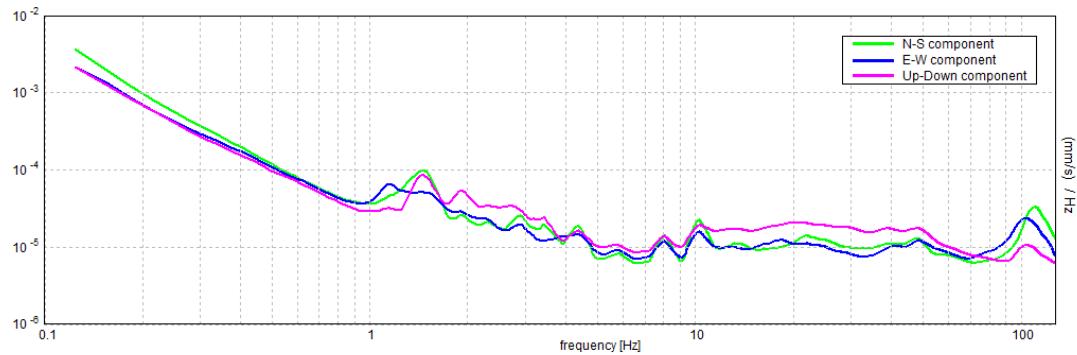


## EXPERIMENTAL vs. SYNTHETIC H/V

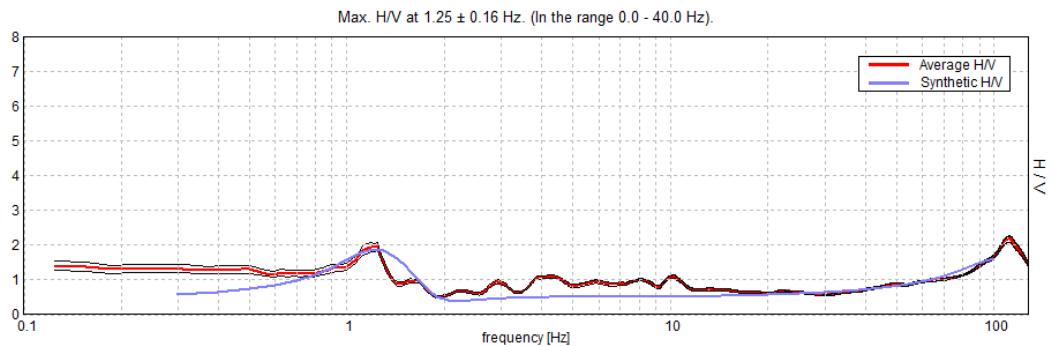

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 0.90                                 | 0.90          | 400      | 0.35          |
| 155.90                               | 155.00        | 800      | 0.35          |
| inf.                                 | inf.          | 1600     | 0.42          |

$$Vs(0.0-30.0) = 777 \text{ m/s}$$

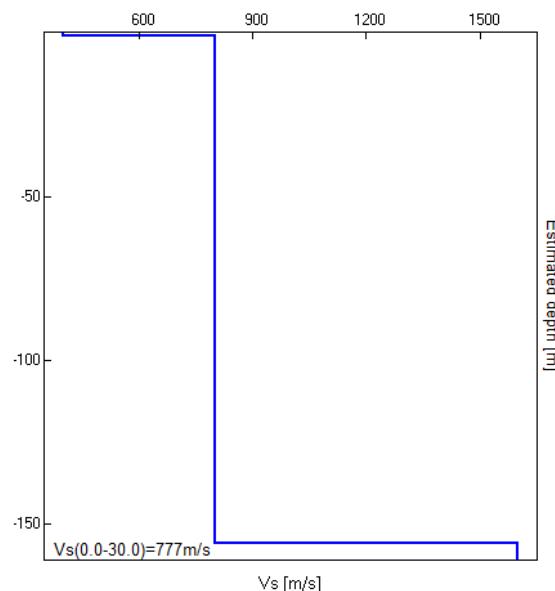

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $1.25 \pm 0.16$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                            |    |  |
|--|----------------------------|----|--|
| $f_0 > 10 / L_w$   | $1.25 > 0.50$              | OK |  |
| $n_c(f_0) > 200$   | $3100.0 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 61 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                    |    |    |
|---|--------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                    |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 1.406 Hz           | OK |    |
| $A_0 > 2$   | $1.96 > 2$         |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.12881  < 0.05$ |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $0.16102 < 0.125$  |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1189 < 1.78$    | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

| Threshold values for $\sigma_f$ and $\sigma_A(f_0)$ |            |           |            |            |            |
|---|------------|-----------|------------|------------|------------|
| Freq. range [Hz]                                    | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
| $\varepsilon(f_0)$ [Hz]                             | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$                   | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$     | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**CASTELLUZZO T26 (in relazione DIASIS 2012: Stazione HVSR – T24)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## CASTELLUZZO T26

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 14:43:21 End recording: 02/08/12 15:29:21

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 97% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $0.22 \pm 0.17$  Hz (in the range 0.0 - 40.0 Hz).

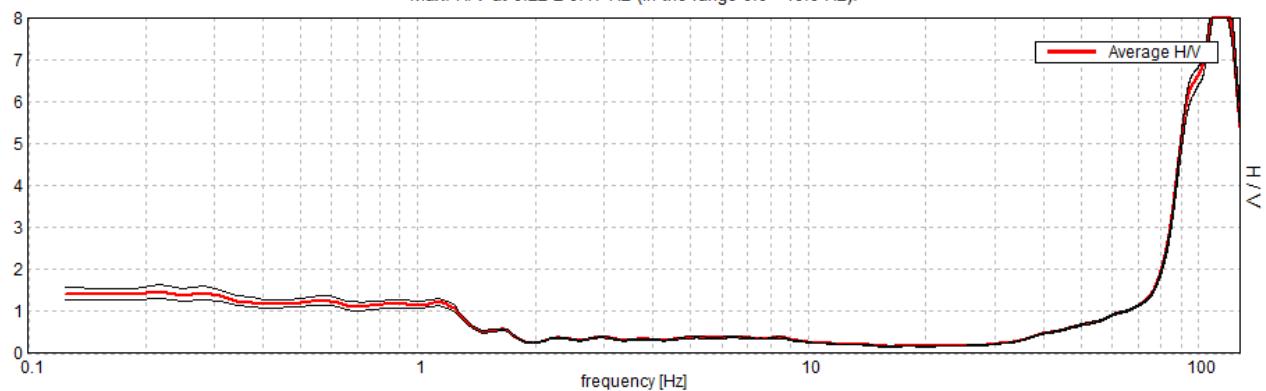


### H/V TIME HISTORY

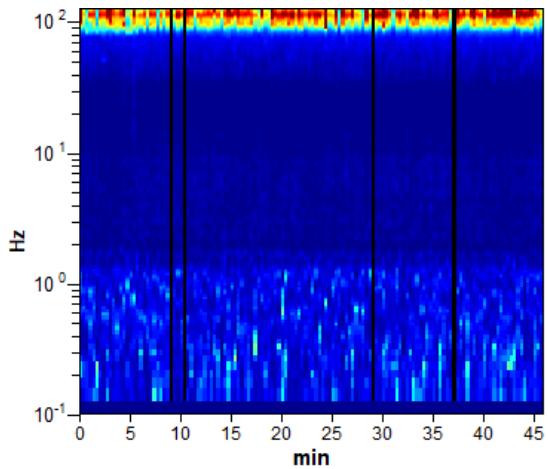

### DIRECTIONAL H/V

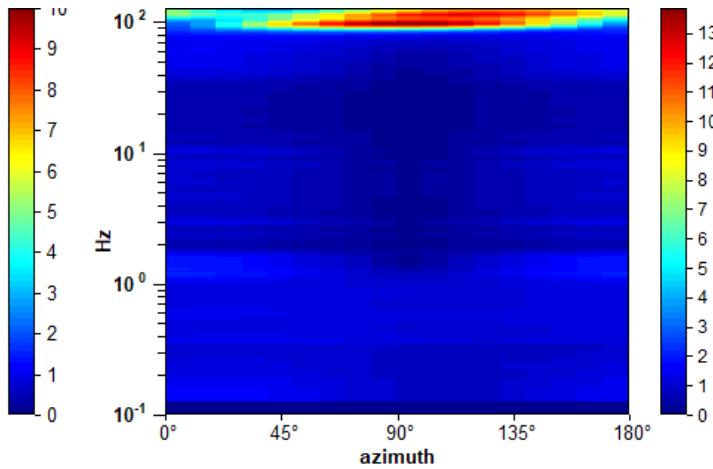

## SINGLE COMPONENT SPECTRA

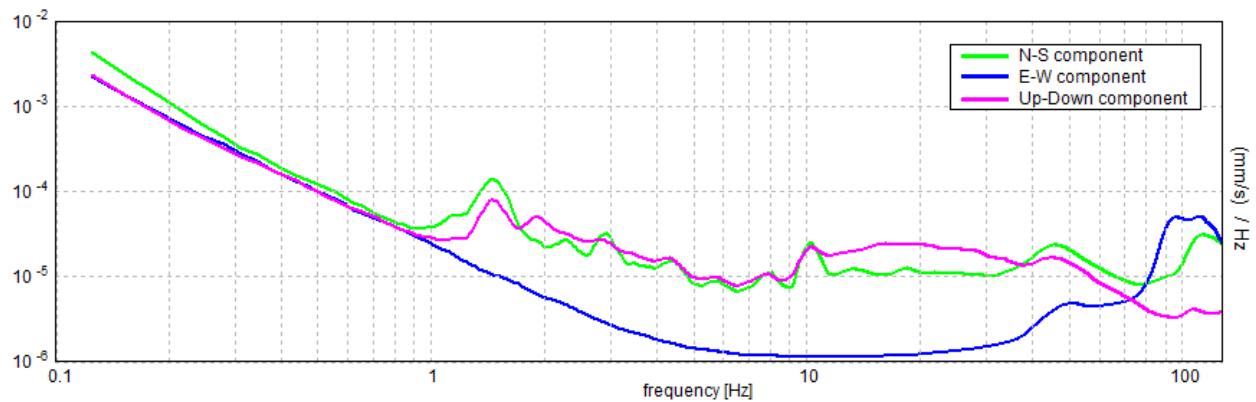

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $0.22 \pm 0.17$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                            |           |           |
|--|----------------------------|-----------|-----------|
| $f_0 > 10 / L_w$   | $0.22 > 0.50$              |           | <b>NO</b> |
| $n_c(f_0) > 200$   | $586.3 > 200$              | <b>OK</b> |           |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 12 times | <b>OK</b> |           |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]


|   |                     |           |           |
|---|---------------------|-----------|-----------|
| Exists $f^-$ in $[f_0/4, f_0]   A_{H/V}(f^-) < A_0 / 2$ | 0.094 Hz            | <b>OK</b> |           |
| Exists $f^+$ in $[f_0, 4f_0]   A_{H/V}(f^+) < A_0 / 2$  |                     |           | <b>NO</b> |
| $A_0 > 2$   | $1.47 > 2$          |           | <b>NO</b> |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$    | $ 0.78712  < 0.05$  |           | <b>NO</b> |
| $\sigma_f < \varepsilon(f_0)$                           | $0.17218 < 0.04375$ |           | <b>NO</b> |
| $\sigma_A(f_0) < \theta(f_0)$                           | $0.1649 < 2.5$      | <b>OK</b> |           |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**CASTELLUZZO T27 (in relazione DIASIS 2012: Stazione HVSR – T25)**

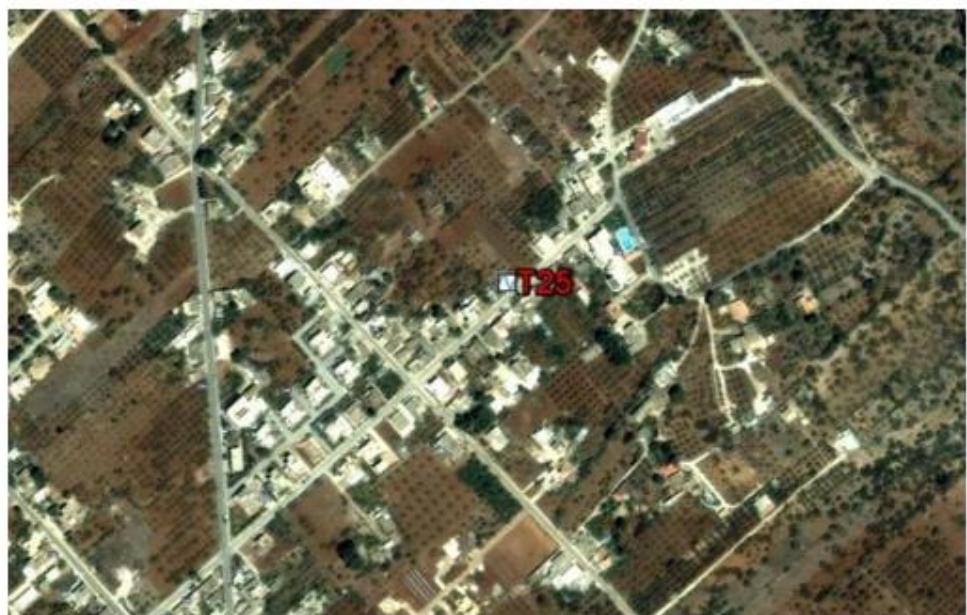

\*sito acquisizione e posizione in vista satellitare da DIASIS 2012

## CASTELLUZZO T27

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 18:30:18 End recording: 02/08/12 19:16:18

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 95% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $1.34 \pm 0.11$  Hz (in the range 0.0 - 40.0 Hz).

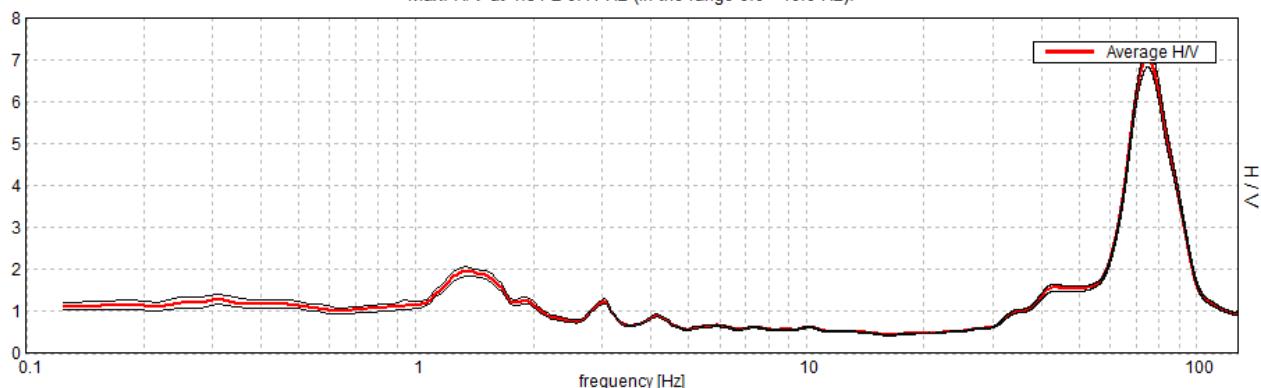


### H/V TIME HISTORY

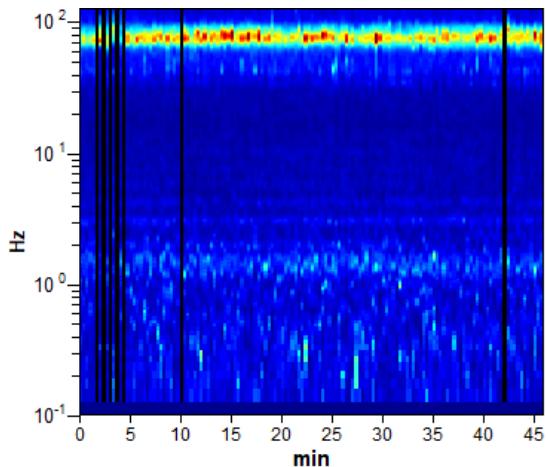

### DIRECTIONAL H/V

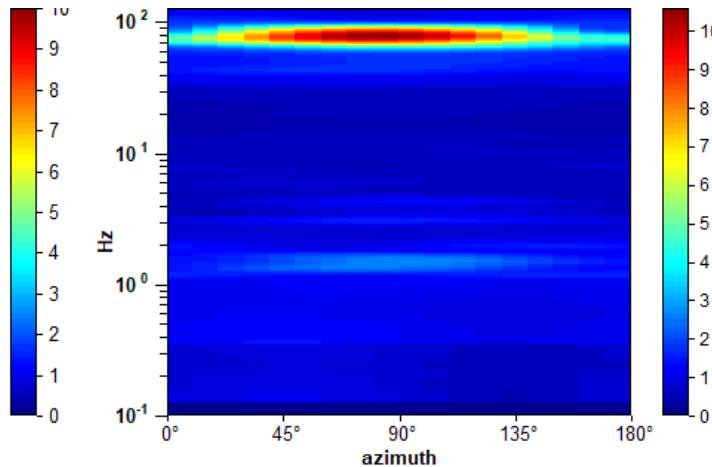

## SINGLE COMPONENT SPECTRA

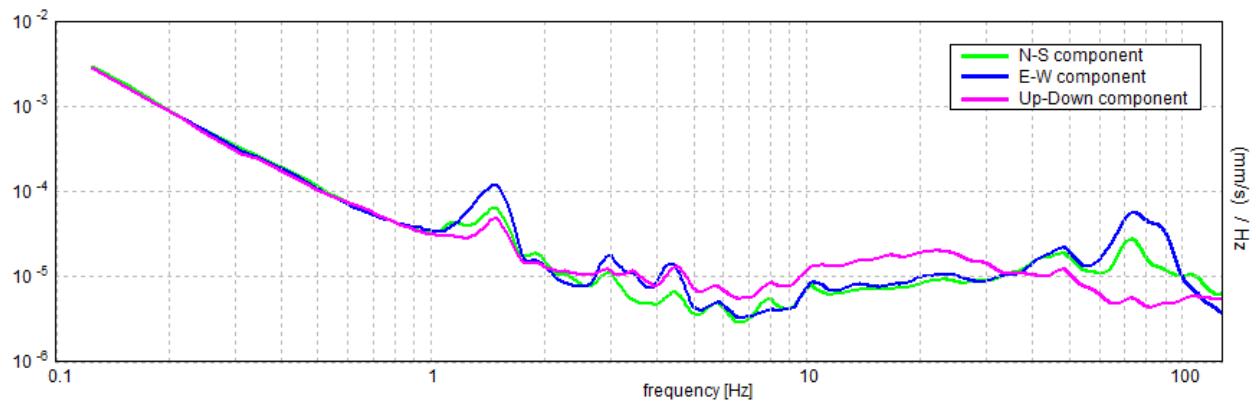

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $1.34 \pm 0.11$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                            |    |  |
|--|----------------------------|----|--|
| $f_0 > 10 / L_w$   | $1.34 > 0.50$              | OK |  |
| $n_c(f_0) > 200$   | $3520.6 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 66 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]


|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                     |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 2.125 Hz            | OK |    |
| $A_0 > 2$   | $1.96 > 2$          |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.08171  < 0.05$  |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $0.10979 < 0.13438$ | OK |    |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1107 < 1.78$     | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**CASTELLUZZO T28 (in relazione DIASIS 2012: Stazione HVSR – T26)**

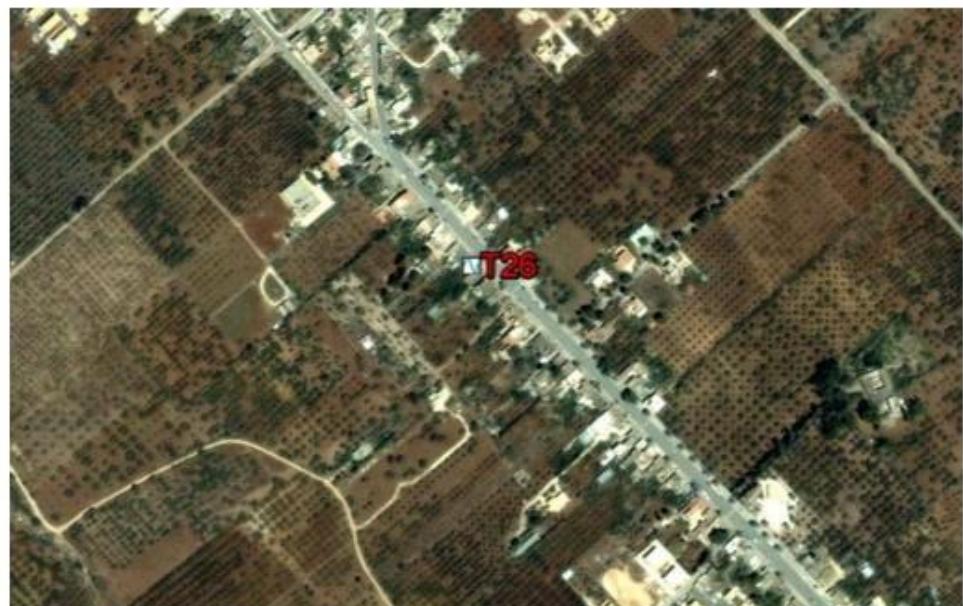

**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## CASTELLUZZO T28

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 16:50:53 End recording: 02/08/12 17:36:53

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 88% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $39.97 \pm 0.03$  Hz (in the range 0.0 - 40.0 Hz).

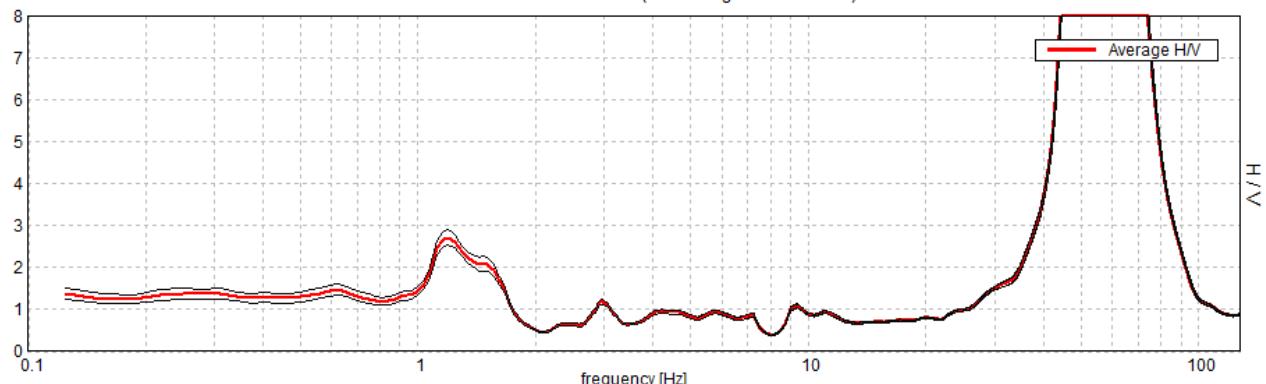


### H/V TIME HISTORY

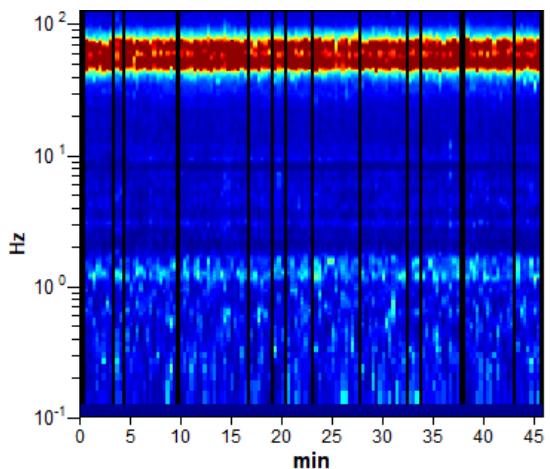

### DIRECTIONAL H/V

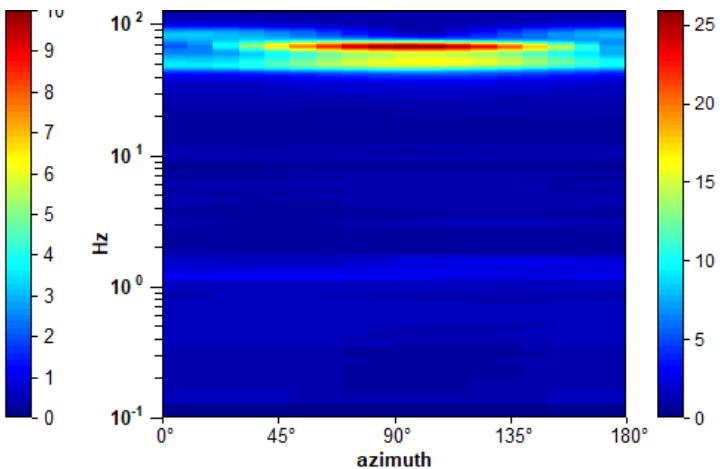


## SINGLE COMPONENT SPECTRA

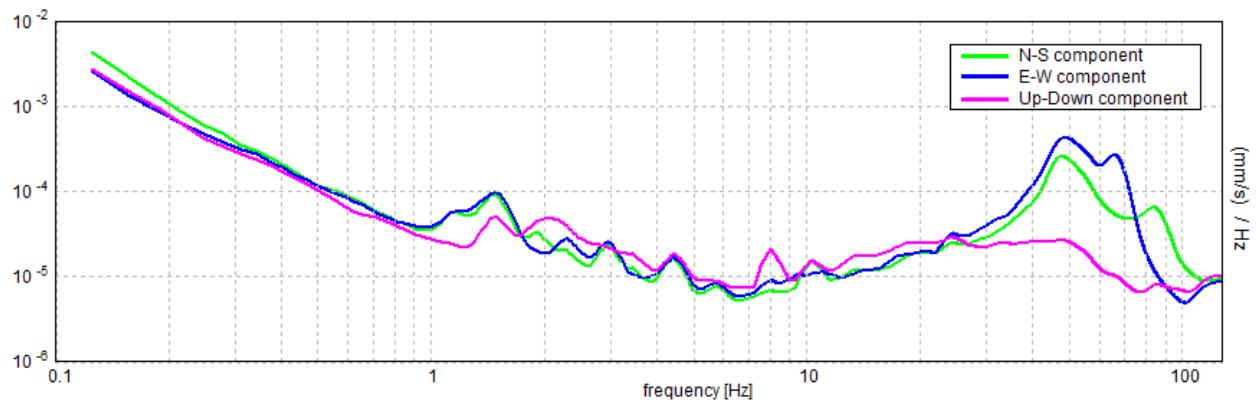


## EXPERIMENTAL vs. SYNTHETIC H/V

Max. H/V at  $39.97 \pm 0.03$  Hz. (In the range 0.0 - 40.0 Hz).

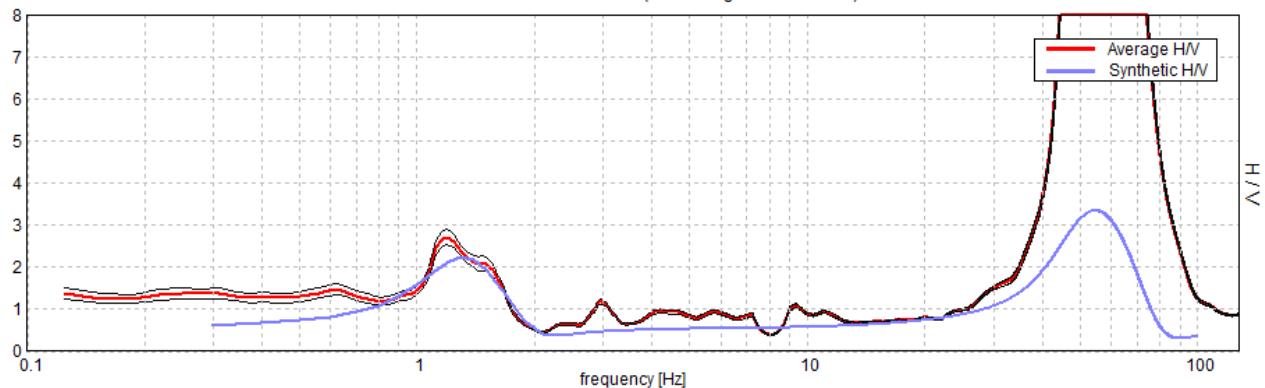

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 1.50                                 | 1.50          | 320      | 0.35          |
| 151.50                               | 150.00        | 800      | 0.35          |
| inf.                                 | inf.          | 1630     | 0.35          |

$$Vs(0.0-30.0) = 744 \text{ m/s}$$

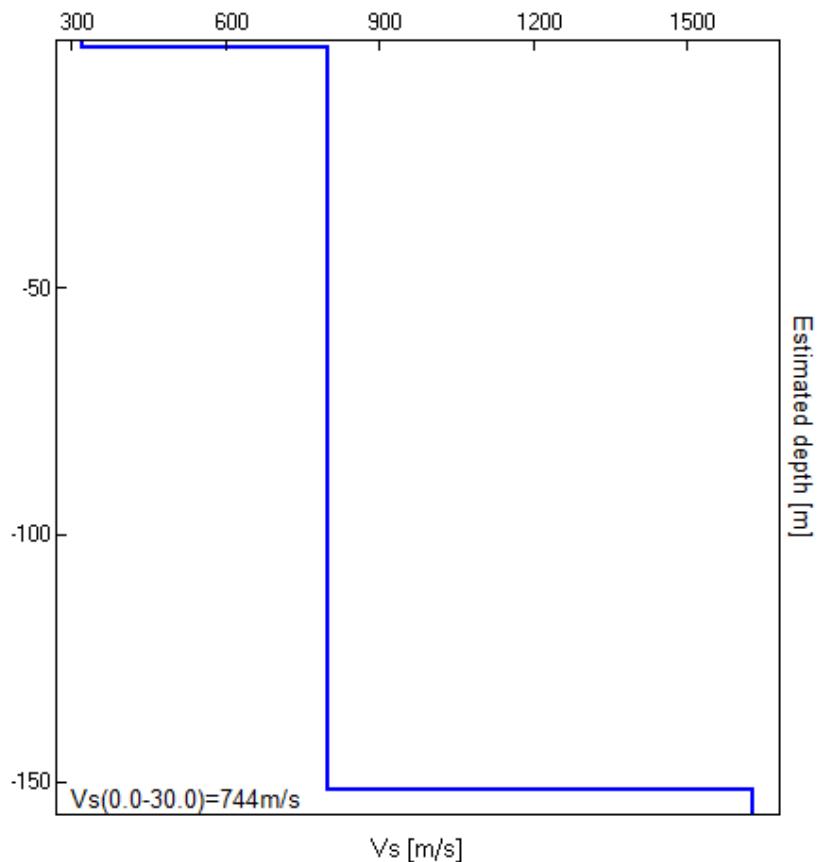

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $39.97 \pm 0.03$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                              |    |  |
|--|------------------------------|----|--|
| $f_0 > 10 / L_w$   | $39.97 > 0.50$               | OK |  |
| $n_c(f_0) > 200$   | $97523.8 > 200$              | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 1920 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                     |    |  |
|---|---------------------|----|--|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ | 34.063 Hz           | OK |  |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 94.094 Hz           | OK |  |
| $A_0 > 2$   | $3.62 > 2$          | OK |  |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.00078  < 0.05$  | OK |  |
| $\sigma_f < \varepsilon(f_0)$                             | $0.03125 < 1.99844$ | OK |  |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1101 < 1.58$     | OK |  |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**CASTELLUZZO T29 (in relazione DIASIS 2012: Stazione HVSR – T27)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## CASTELLUZZO T29

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 17:32:49 End recording: 02/08/12 18:18:48

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 99% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $0.22 \pm 0.37$  Hz (in the range 0.0 - 40.0 Hz).

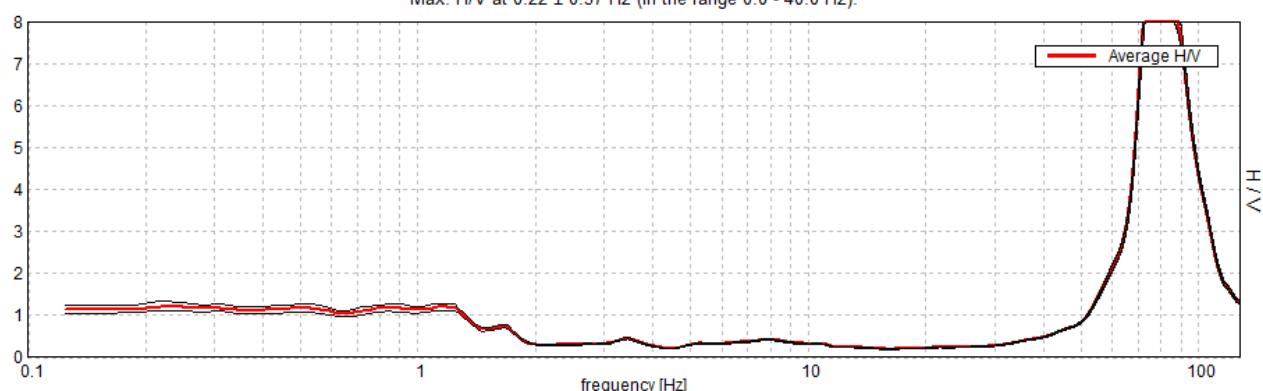


### H/V TIME HISTORY

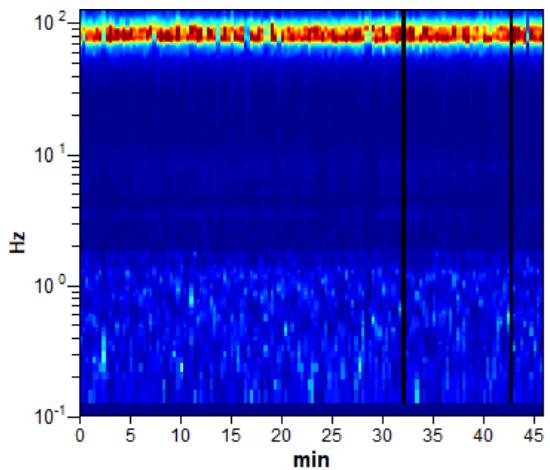

### DIRECTIONAL H/V

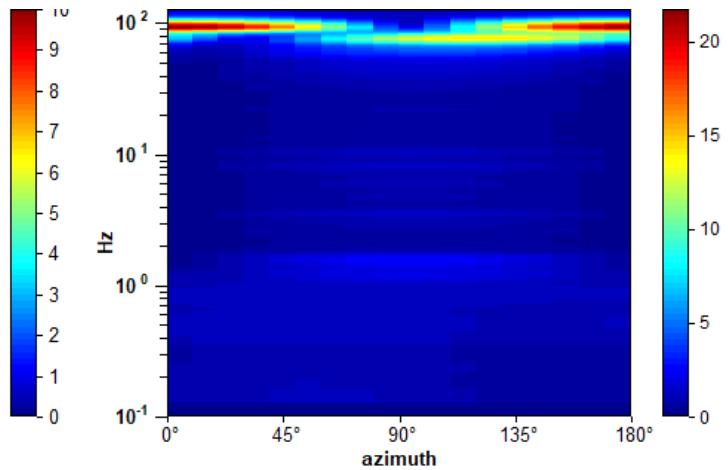

## SINGLE COMPONENT SPECTRA

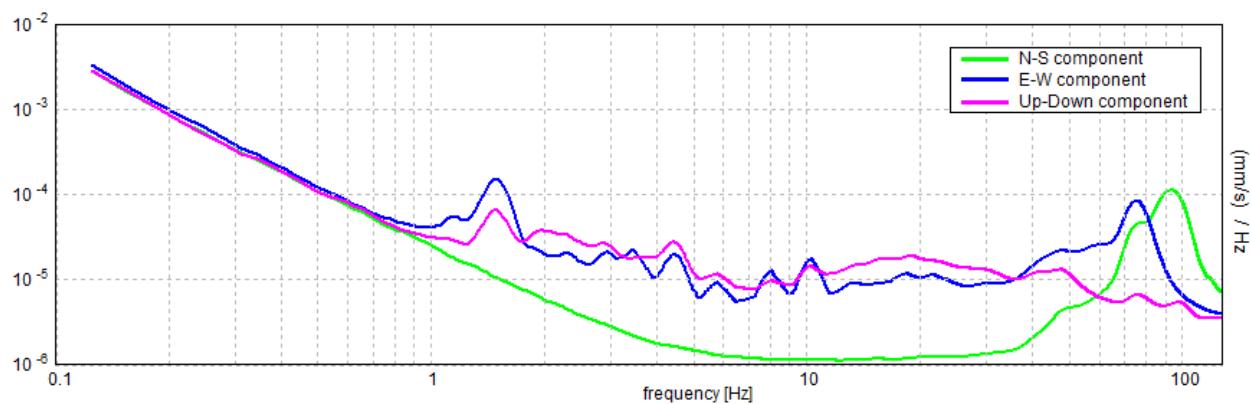

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $0.22 \pm 0.37$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                            |    |    |
|--|----------------------------|----|----|
| $f_0 > 10 / L_w$   | $0.22 > 0.50$              |    | NO |
| $n_c(f_0) > 200$   | $595.0 > 200$              | OK |    |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 12 times | OK |    |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]   A_{H/V}(f^-) < A_0 / 2$ | 0.094 Hz            | OK |    |
| Exists $f^+$ in $[f_0, 4f_0]   A_{H/V}(f^+) < A_0 / 2$  |                     |    | NO |
| $A_0 > 2$   | $1.22 > 2$          |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$    | $ 1.68653  < 0.05$  |    | NO |
| $\sigma_f < \varepsilon(f_0)$                           | $0.36893 < 0.04375$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                           | $0.1163 < 2.5$      | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**CASTELLUZZO T30 (in relazione DIASIS 2012: Stazione HVSR – T28)**



**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## CASTELLUZZO T30

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 08:46:25 End recording: 02/08/12 09:32:25

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 51% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $1.5 \pm 0.0$  Hz (in the range 0.0 - 40.0 Hz).

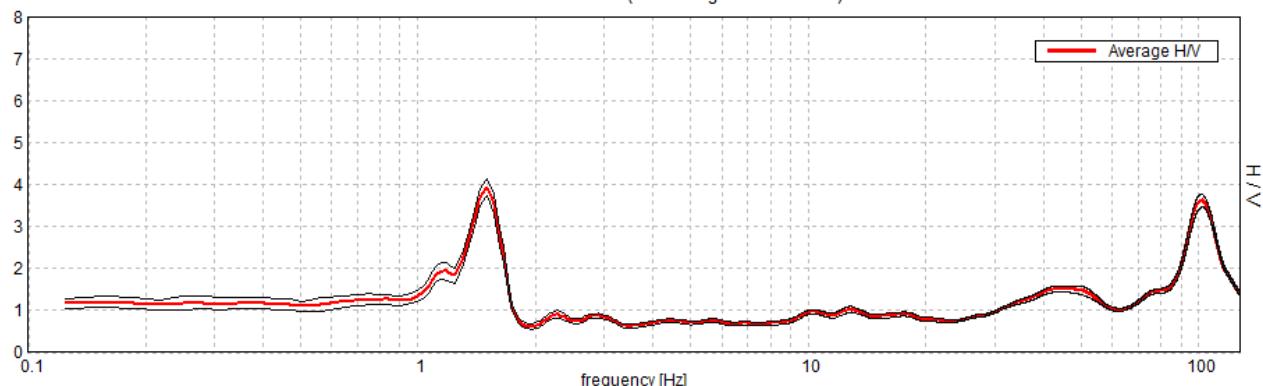


### H/V TIME HISTORY

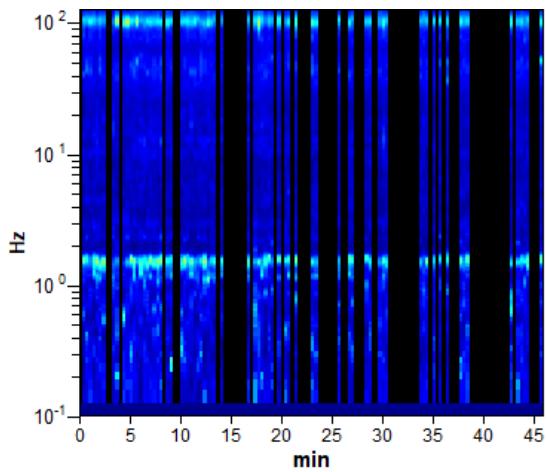


### DIRECTIONAL H/V

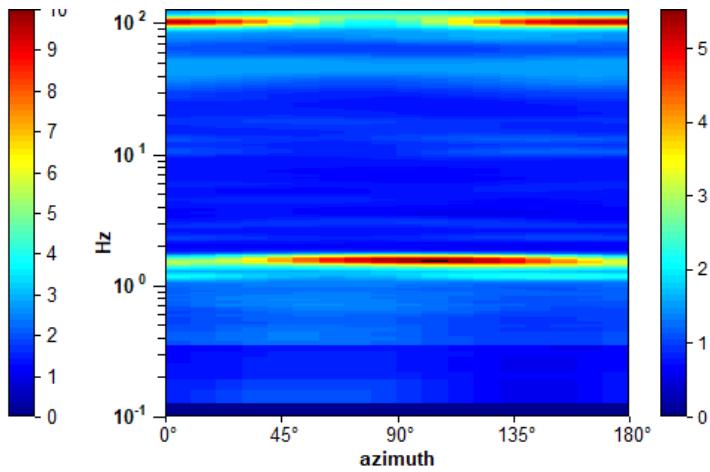

## SINGLE COMPONENT SPECTRA

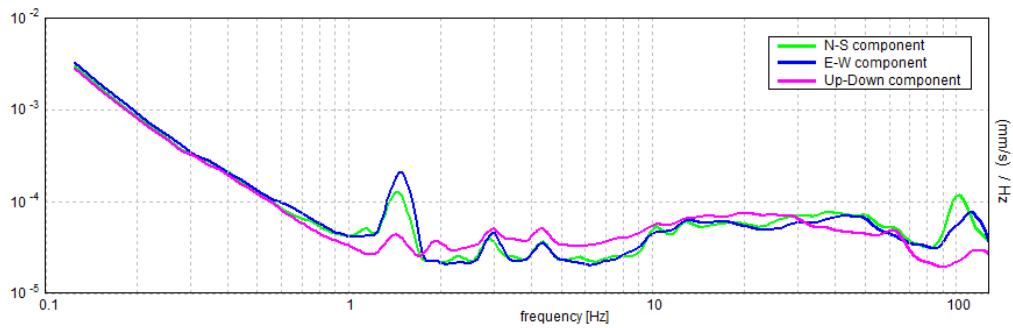


## EXPERIMENTAL vs. SYNTHETIC H/V

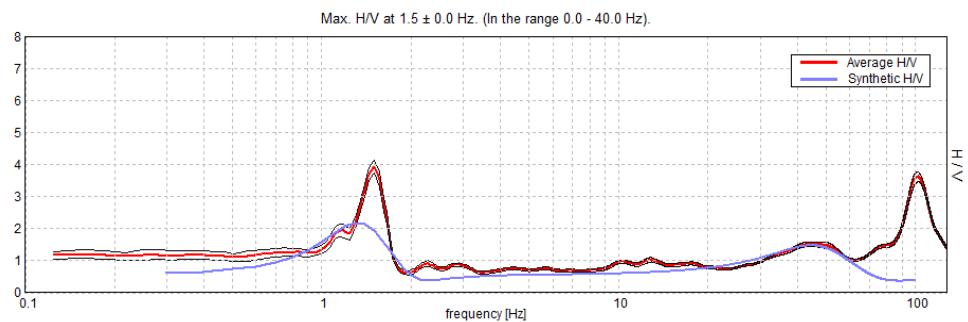

| Depth at the bottom of the layer [m] | Thickness [m] | $V_s$ [m/s] | Poisson ratio |
|--------------------------------------|---------------|-------------|---------------|
| 2.36                                 | 2.36          | 465         | 0.45          |
| 149.36                               | 147.00        | 800         | 0.35          |
| inf.                                 | inf.          | 1677        | 0.35          |

$$V_s(0.0-30.0) = 757 \text{ m/s}$$

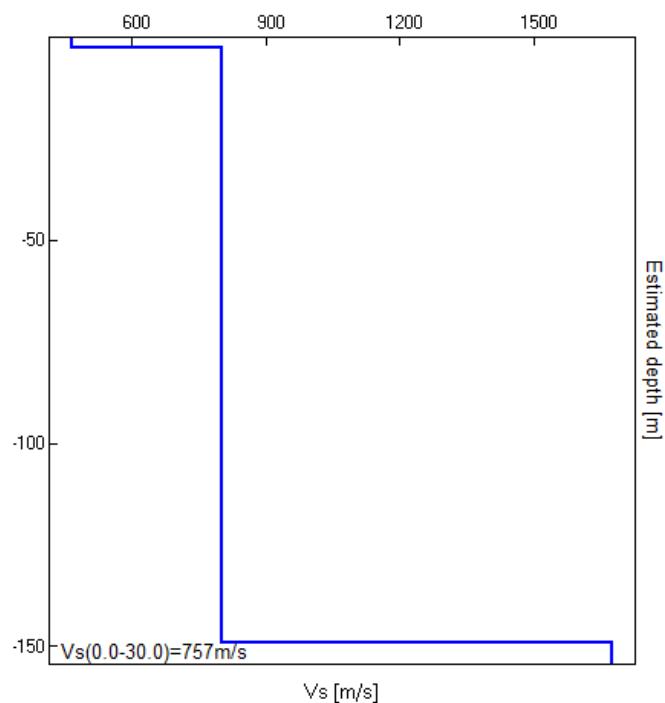

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $1.5 \pm 0.0$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                            |    |  |
|--|----------------------------|----|--|
| $f_0 > 10 / L_w$   | 1.50 > 0.50                | OK |  |
| $n_c(f_0) > 200$   | 2130.0 > 200               | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5$ Hz<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5$ Hz | Exceeded 0 out of 73 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]


|   |                |    |  |
|---|----------------|----|--|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ | 1.25 Hz        | OK |  |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 1.688 Hz       | OK |  |
| $A_0 > 2$   | 3.93 > 2       | OK |  |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.0  < 0.05$ | OK |  |
| $\sigma_f < \varepsilon(f_0)$                             | $0.0 < 0.15$   | OK |  |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.201 < 1.78$ | OK |  |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

| Threshold values for $\sigma_f$ and $\sigma_A(f_0)$ |            |           |            |            |            |
|---|------------|-----------|------------|------------|------------|
| Freq. range [Hz]                                    | < 0.2      | 0.2 - 0.5 | 0.5 - 1.0  | 1.0 - 2.0  | > 2.0      |
| $\varepsilon(f_0)$ [Hz]                             | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$                   | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$     | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |



**CASTELLUZZO T31 (in relazione DIASIS 2012: Stazione HVSR – T29)**

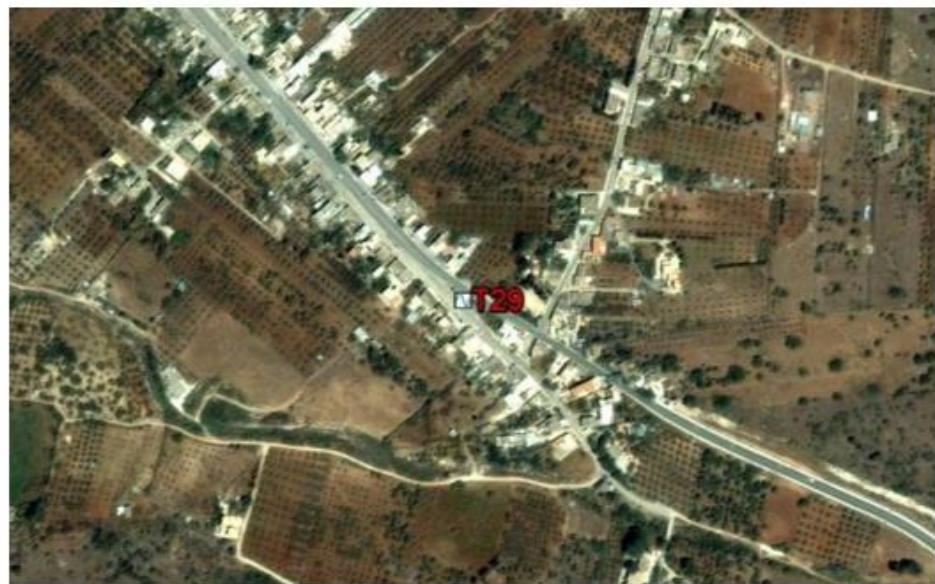

**\*sito acquisizione e posizione in vista satellitare da DIASIS 2012**

## CASTELLUZZO T31

Instrument: TRZ-0169/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 17:45:26 End recording: 02/08/12 18:31:26

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 95% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $1.5 \pm 0.16$  Hz (in the range 0.0 - 40.0 Hz).

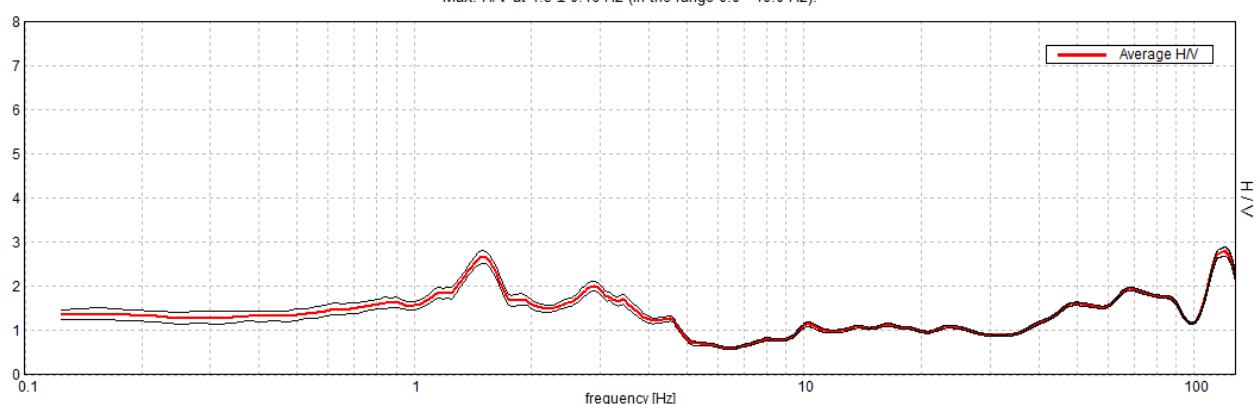


### H/V TIME HISTORY

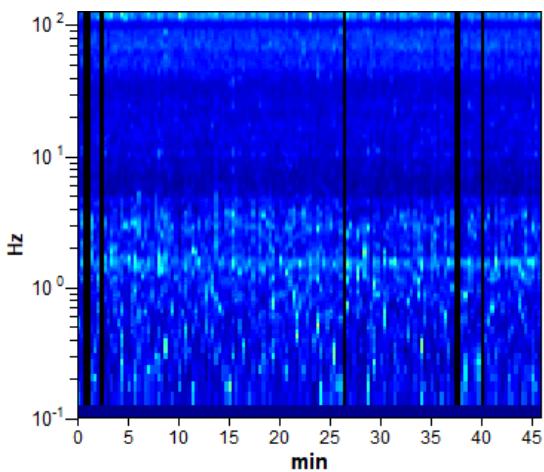


### DIRECTIONAL H/V

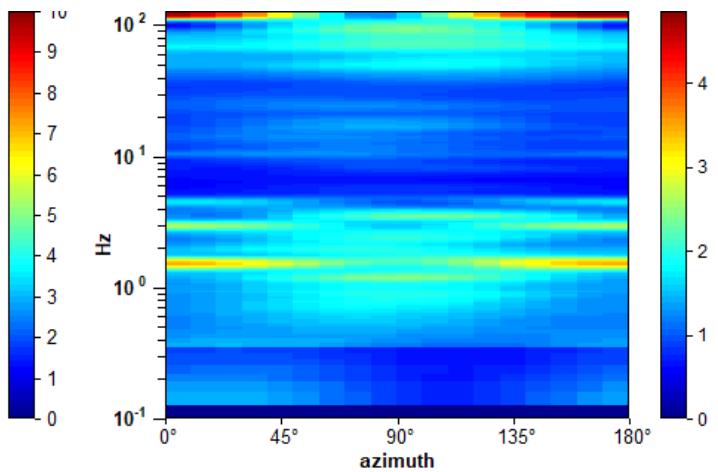

## SINGLE COMPONENT SPECTRA

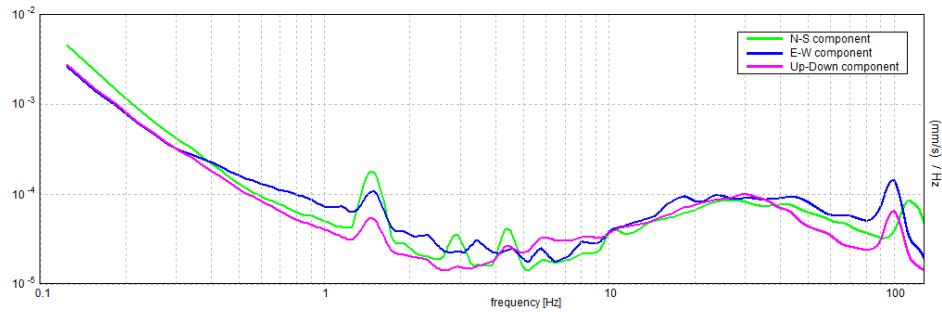


## EXPERIMENTAL vs. SYNTHETIC H/V

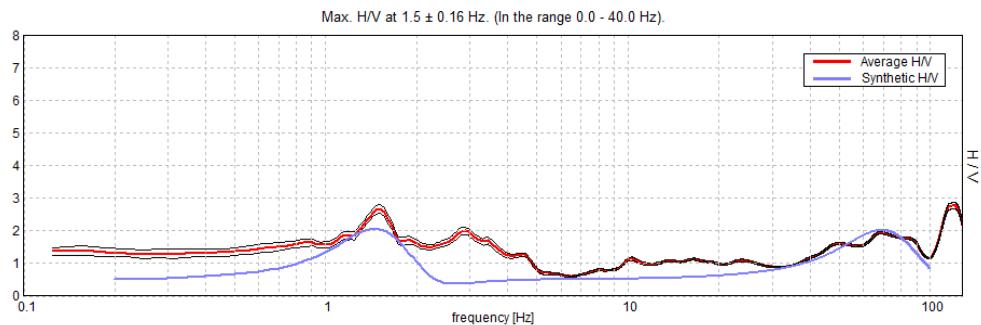

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 1.55                                 | 1.55          | 450      | 0.45          |
| 137.55                               | 136.00        | 800      | 0.45          |
| inf.                                 | inf.          | 1300     | 0.45          |

$$Vs(0.0-30.0) = 769 \text{ m/s}$$

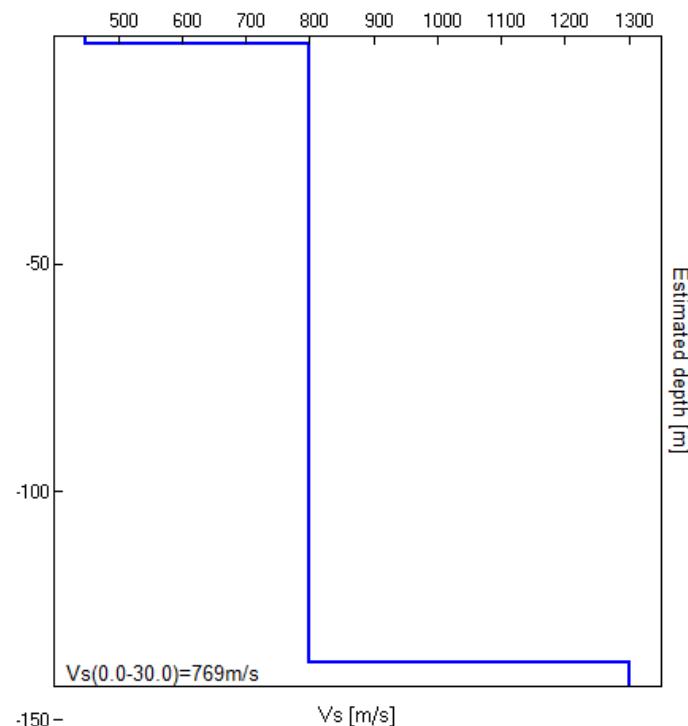

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $1.5 \pm 0.16$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                            |    |  |
|--|----------------------------|----|--|
| $f_0 > 10 / L_w$   | $1.50 > 0.50$              | OK |  |
| $n_c(f_0) > 200$   | $3930.0 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5$ Hz<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5$ Hz | Exceeded 0 out of 73 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                    |    |    |
|---|--------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ | 0.469 Hz           | OK |    |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 3.875 Hz           | OK |    |
| $A_0 > 2$   | $2.67 > 2$         | OK |    |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 0.10571  < 0.05$ |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $0.15857 < 0.15$   |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1363 < 1.78$    | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

**Threshold values for  $\sigma_f$  and  $\sigma_A(f_0)$**

| Freq. range [Hz]                                | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
|---|------------|-----------|------------|------------|------------|
| $\varepsilon(f_0)$ [Hz]                         | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$               | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$ | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

**CASTELLUZZO T32 (in relazione DIASIS 2012: Stazione HVSR – T30)**



\*sito acquisizione e posizione in vista satellitare da DIASIS 2012

## CASTELLUZZO T32

Instrument: TRZ-0165/01-12

Data format: 16 byte

Full scale [mV]: n.a.

Start recording: 02/08/12 16:29:23 End recording: 02/08/12 17:15:23

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h46'00". Analyzed 78% trace (manual window selection)

Sampling rate: 256 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

### HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at  $1.47 \pm 3.85$  Hz (in the range 0.0 - 40.0 Hz).

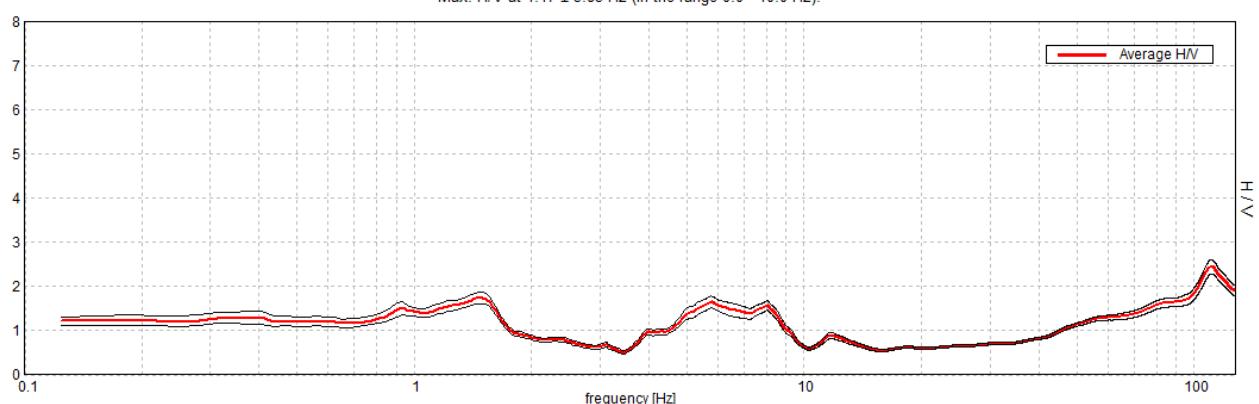


### H/V TIME HISTORY

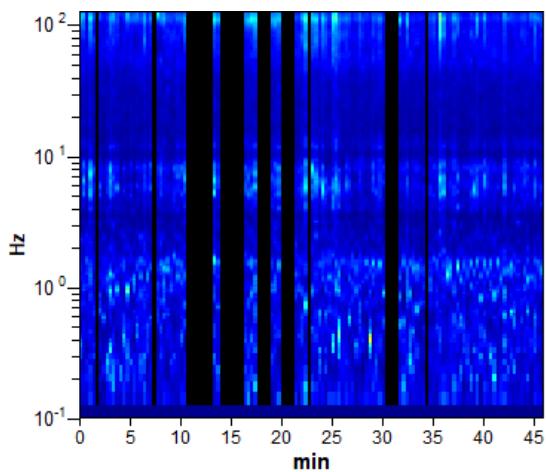


### DIRECTIONAL H/V

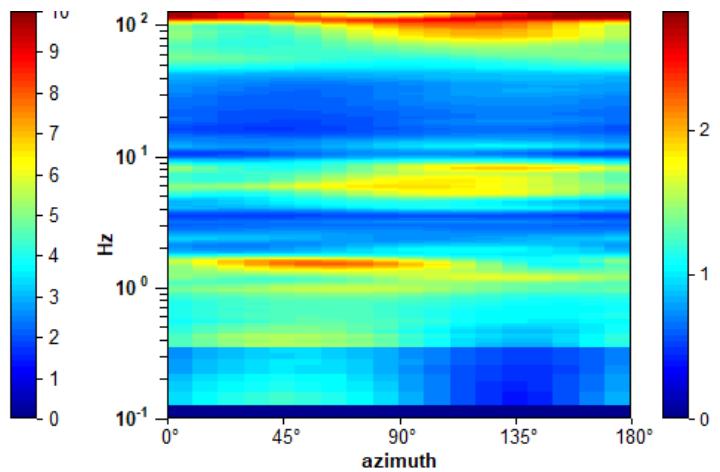

## SINGLE COMPONENT SPECTRA

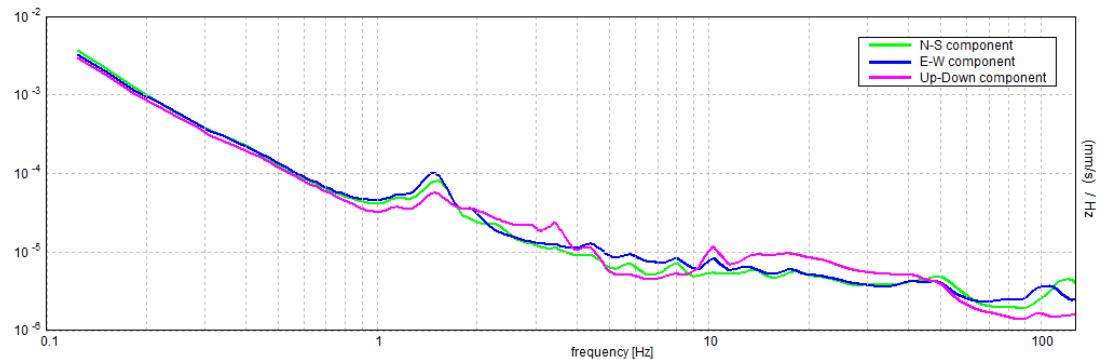


## EXPERIMENTAL vs. SYNTHETIC H/V

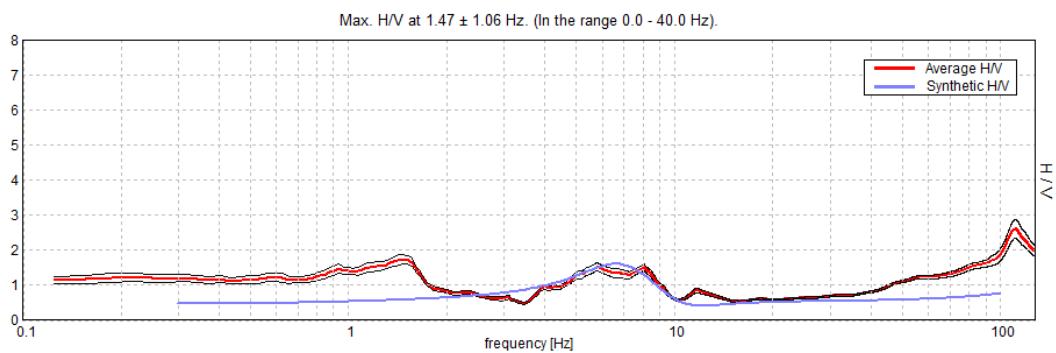

| Depth at the bottom of the layer [m] | Thickness [m] | Vs [m/s] | Poisson ratio |
|--------------------------------------|---------------|----------|---------------|
| 0.30                                 | 0.30          | 300      | 0.35          |
| 28.30                                | 28.00         | 800      | 0.35          |
| inf.                                 | inf.          | 1590     | 0.35          |

$$Vs(0.0-30.0)=809 \text{ m/s}$$

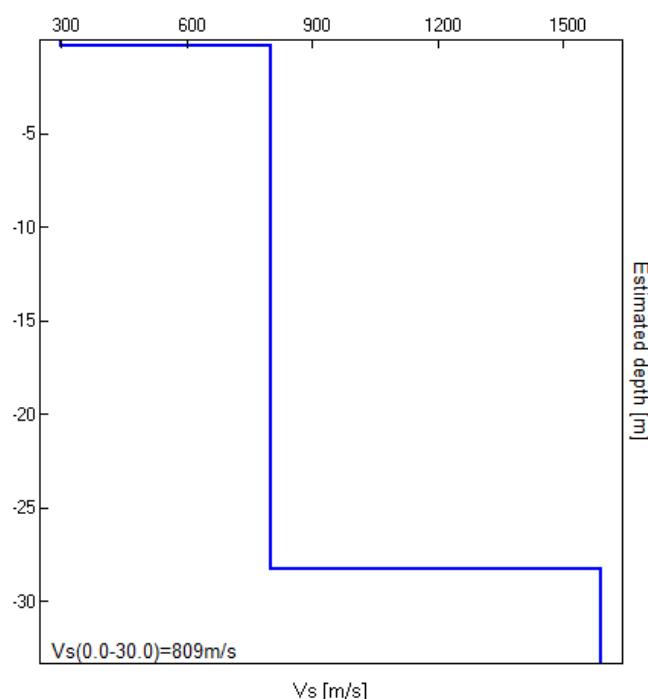

[According to the SESAME, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

**Max. H/V at  $1.47 \pm 3.85$  Hz (in the range 0.0 - 40.0 Hz).**

**Criteria for a reliable H/V curve**

[All 3 should be fulfilled]

|  |                            |    |  |
|--|----------------------------|----|--|
| $f_0 > 10 / L_w$   | $1.47 > 0.50$              | OK |  |
| $n_c(f_0) > 200$   | $3143.1 > 200$             | OK |  |
| $\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$<br>$\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$ | Exceeded 0 out of 72 times | OK |  |

**Criteria for a clear H/V peak**

[At least 5 out of 6 should be fulfilled]

|   |                     |    |    |
|---|---------------------|----|----|
| Exists $f^-$ in $[f_0/4, f_0]$   $A_{H/V}(f^-) < A_0 / 2$ |                     |    | NO |
| Exists $f^+$ in $[f_0, 4f_0]$   $A_{H/V}(f^+) < A_0 / 2$  | 1.969 Hz            | OK |    |
| $A_0 > 2$   | $1.74 > 2$          |    | NO |
| $f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$      | $ 2.61885  < 0.05$  |    | NO |
| $\sigma_f < \varepsilon(f_0)$                             | $3.84644 < 0.14688$ |    | NO |
| $\sigma_A(f_0) < \theta(f_0)$                             | $0.1285 < 1.78$     | OK |    |

|                        |   |
|------------------------|---|
| $L_w$                  | window length   |
| $n_w$                  | number of windows used in the analysis  |
| $n_c = L_w n_w f_0$    | number of significant cycles  |
| $f$                    | current frequency   |
| $f_0$                  | H/V peak frequency  |
| $\sigma_f$             | standard deviation of H/V peak frequency  |
| $\varepsilon(f_0)$     | threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$   |
| $A_0$                  | H/V peak amplitude at frequency $f_0$   |
| $A_{H/V}(f)$           | H/V curve amplitude at frequency $f$  |
| $f^-$                  | frequency between $f_0/4$ and $f_0$ for which $A_{H/V}(f^-) < A_0/2$  |
| $f^+$                  | frequency between $f_0$ and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$   |
| $\sigma_A(f)$          | standard deviation of $A_{H/V}(f)$ , $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided |
| $\sigma_{\log H/V}(f)$ | standard deviation of $\log A_{H/V}(f)$ curve   |
| $\theta(f_0)$          | threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$   |

| Threshold values for $\sigma_f$ and $\sigma_A(f_0)$ |            |           |            |            |            |
|---|------------|-----------|------------|------------|------------|
| Freq. range [Hz]                                    | < 0.2      | 0.2 – 0.5 | 0.5 – 1.0  | 1.0 – 2.0  | > 2.0      |
| $\varepsilon(f_0)$ [Hz]                             | $0.25 f_0$ | $0.2 f_0$ | $0.15 f_0$ | $0.10 f_0$ | $0.05 f_0$ |
| $\theta(f_0)$ for $\sigma_A(f_0)$                   | 3.0        | 2.5       | 2.0        | 1.78       | 1.58       |
| $\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$     | 0.48       | 0.40      | 0.30       | 0.25       | 0.20       |

